

**Enofazni usmerjalni mostički 2,2 A, 3,3 A**  
**Single-phase rectifier bridges 2.2 A, 3.3 A**

Tip/Type	$U_{RMS}$	$U_{RRM}$	$I_{FAV}$ C breme C load	$I_{FAV}$ Al plošča Al plate	$U_F$ pri/at $I_F$ $\vartheta_1 = 25^\circ C$		$I_R$ pri/at $U_{RRM}$ $\vartheta_1 = 25^\circ C$	$\vartheta_{op}$	Sl./ Fig.
	(V)	(V)	(A)	(A)	(V)	(A)	( $\mu A$ )	( $^\circ C$ )	
B 40 C 3700/2200	100	45							33
B 80 C 3700/2200	190	125							
B 125 C 3700/2200	300	200	2,2	3,7	1	3	10	-55 do/to +150	
B 250 C 3700/2200	600	400							
B 380 C 3700/2200	900	600							
B 40 C 5000/3300	100	65							33
B 80 C 5000/3300	190	125							
B 125 C 5000/3300	300	200	3,3	5,0	1,1	5	10	-55 do/to +150	
B 250 C 5000/3300	600	400							
B 380 C 5000/3300	900	600							

**Enofazni usmerjalni mostički 35 A**  
**Single-phase rectifier bridges 35 A**



Tip/Type	$U_{RRM}$	$U_{RMS}$	$\vartheta_{op}$	$I_{FAV}$ R breme/load $\vartheta_{case} = 55^\circ C$	$I_{FSM}$ $t = 10 ms$ $\vartheta_1 = 25^\circ C$	Sl./ Fig.
	(V)	(V)	( $^\circ C$ )	(A)	(A)	
BYW 64	400	480	-65 do/to	35	400	34
BYW 66	600	720	+175			

**Trifazni usmerjalni mostički 40 A**  
**Three-phase rectifier bridges 40 A**



Tip/Type	$U_{DC}$	$U_{RMS}$	$\vartheta_{op}$	$I_{FAV}$ R breme/load $\vartheta_{case} = 100^\circ C$	$I_{FSM}$	Sl./ Fig.
	(V)	(V)	( $^\circ C$ )	(A)	(A)	
Si G 30/ 38-40	38	30	-65 do/to +175	40	400	35
Si G 60/ 78-40	78	60				
Si G 125/ 165-40	165	125				
Si G 250/ 330-40	330	250				
Si G 380/ 500-40	500	380				

**Silicijevi usmerjalni mostički**  
**Silicon rectifier bridges**



Tip/Type	$U_F$	$I_F$	$\vartheta_{amb}$	Masa Weight	Fig./ Sl./
	(V)	(A)	( $^\circ C$ )	(g)	
PV 1153 V	500	1,5	45	75	36

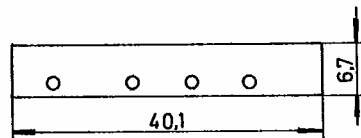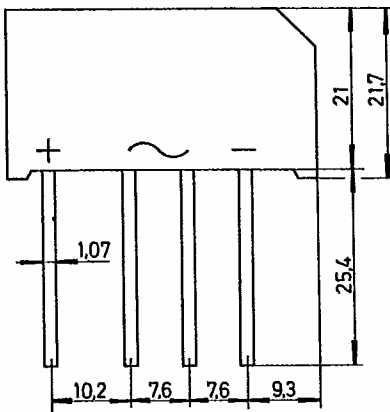



Sl./Fig. 33

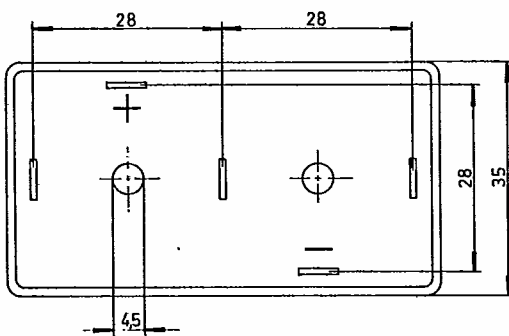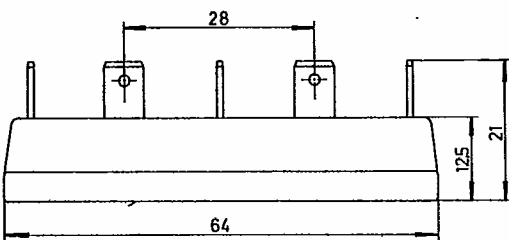


Sl./Fig. 35

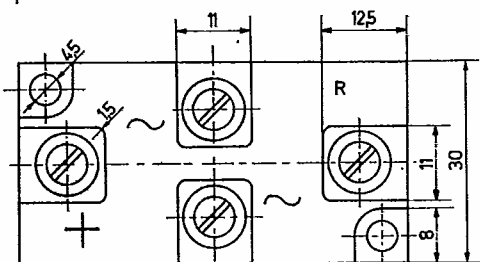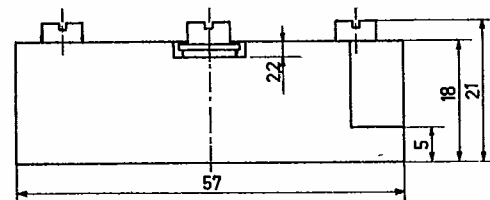

Sl./Fig. 36



Sl./Fig. 34



This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.