


# Variable Capacitance Diode for Electronic Tuning

## FEATURES

- High capacitance ratio(n = 10min) and suitable for wide band tuner.
- Ultra small Resin Package (URP) is suitable for surface mount design.
- Low series resistance and good C-V linearity.



## DEVICE MARKING

HVU200A = 2

## ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C)

Item	Symbol	Value	Unit
Reverse voltage	V <sub>R</sub>	32	V
Junction temperature	T <sub>j</sub>	125	°C
Storage temperature	T <sub>stg</sub>	- 55 to +125	°C

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse current	I <sub>R1</sub>	-	-	10	nA	V <sub>R</sub> = 30V
	I <sub>R2</sub>	-	-	100		V <sub>R</sub> = 30V, T <sub>A</sub> = 60°C
Capacitance	C <sub>2</sub>	27.7	-	31.8	pF	V <sub>R</sub> = 2V, f = 1 MHz
	C <sub>25</sub>	2.67	-	3.03		V <sub>R</sub> = 25V, f = 1 MHz
Capacitance ratio	n	10.0	-	-	-	C <sub>2</sub> / C <sub>25</sub>
Series resistance	r <sub>s</sub>	-	-	0.70	Ω	V <sub>R</sub> = 5V, f = 470 MHz
Matching error	ΔC/C*1	-	-	2.0	%	V <sub>R</sub> = 2 to 25V, f = 1 MHz

Note: \*1. C.C system (Continuous Connected taping system) enable to make any 10 pcs of ΔC/C continuous in a reel , expect extension to another group.

Calculate Matching Error,

$$\Delta C/C = \frac{(C_{\max} - C_{\min})}{C_{\min}} \times 100 (\%)$$

HVU200A

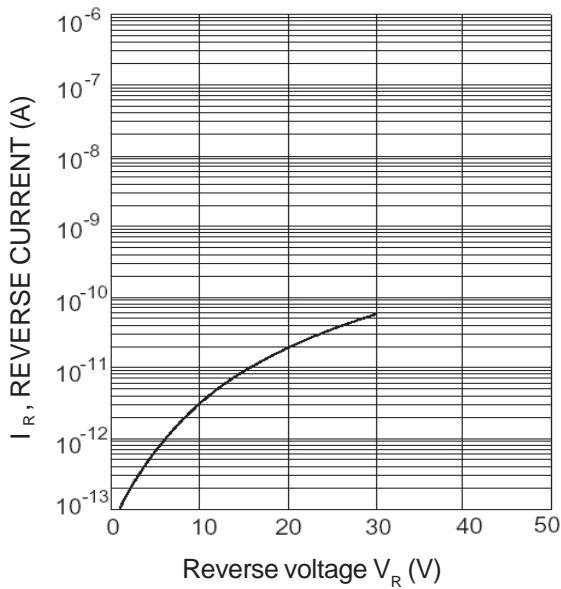


Fig.1 Reverse current Vs. Reverse voltage

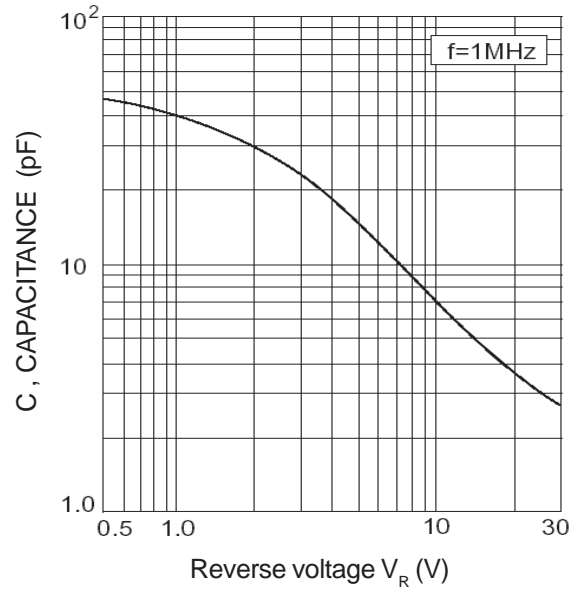


Fig.2 Capacitance Vs. Reverse voltage

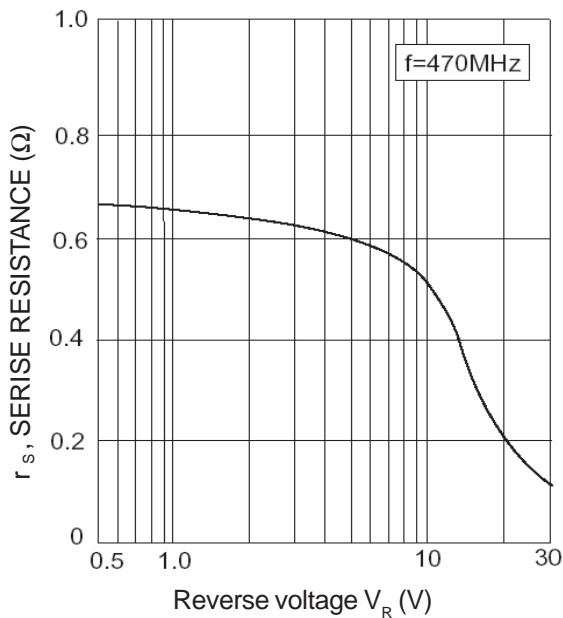


Fig.3 Series resistance Vs. Reverse voltage

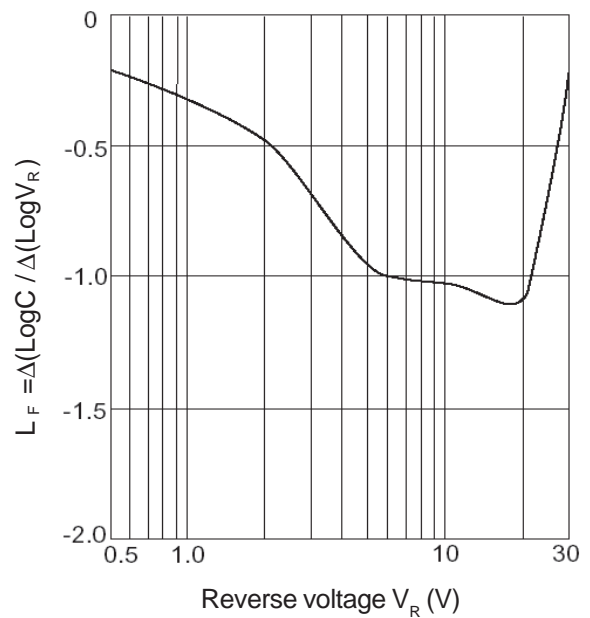


Fig.4 Linearity factor Vs. Reverse voltage

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.