


FETKY™ MOSFET & SCHOTTKY RECTIFIER

- Co-packaged HEXFET® Power MOSFET and Schottky Diode
- Generation 5 Technology
- Logic Level Gate Drive
- Minimize Circuit Inductance
- Ideal For Synchronous Regulator Application




$V_{DSS} = 30V$
$R_{DS(on)} = 0.014\Omega$
$I_D = 64A$

Description

The FETKY family of co-packaged HEXFET power MOSFETs and Schottky Diodes offer the designer an innovative board space saving solution for switching regulator applications. A low on resistance Gen 5 MOSFET with a low forward voltage drop Schottky diode and minimized component interconnect inductance and resistance result in maximized converter efficiencies.

The D²Pak is a surface mount power package capable of accommodating die sizes up to HEX-4. It provides the highest power capability and the lowest possible on-resistance in any existing surface mount package. The D²Pak is suitable for high current applications because of its low internal connection resistance and can dissipate up to 2.0W in a typical surface mount application.



Absolute Maximum Ratings

	Parameter	Max.	Units
$I_D @ T_C = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$ ③	64	A
$I_D @ T_C = 100^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$ ③	45	
I_{DM}	Pulsed Drain Current ①③	220	
$P_D @ T_A = 25^\circ C$	Power Dissipation	3.1	W
$P_D @ T_C = 25^\circ C$	Power Dissipation	89	W
	Linear Derating Factor	0.56	W/°C
V_{GS}	Gate-to-Source Voltage	± 16	V
T_J	Operating Junction and	-55 to + 150	°C
T_{STG}	Storage Temperature Range		
	Soldering Temperature, for 10 seconds	300 (1.6mm from case)	

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	—	1.4	°C/W
$R_{\theta JA}$	Junction-to-Ambient (PCB Mounted, steady-state)**	—	40	


IRL3103D1S

International
IR Rectifier

MOSFET Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)DSS}$	Drain-to-Source Breakdown Voltage	30	—	—	V	$V_{GS} = 0V, I_D = 250\mu A$
$\Delta V_{(BR)DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	0.037	—	V/ $^\circ\text{C}$	Reference to $25^\circ\text{C}, I_D = 1\text{mA}$ ③
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	—	—	0.014	Ω	$V_{GS} = 10V, I_D = 34A$ ②
		—	—	0.019		$V_{GS} = 4.5V, I_D = 28A$ ②
$V_{GS(th)}$	Gate Threshold Voltage	1.0	—	—	V	$V_{DS} = V_{GS}, I_D = 250\mu A$
g_{fs}	Forward Transconductance	23	—	—	S	$V_{DS} = 25V, I_D = 34A$ ③
I_{DSS}	Drain-to-Source Leakage Current	—	—	0.10	mA	$V_{DS} = 30V, V_{GS} = 0V$
		—	—	22		$V_{DS} = 24V, V_{GS} = 0V, T_J = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Forward Leakage	—	—	100	nA	$V_{GS} = 16V$
	Gate-to-Source Reverse Leakage	—	—	-100		$V_{GS} = -16V$
Q_g	Total Gate Charge	—	—	43	nC	$I_D = 32A$
Q_{gs}	Gate-to-Source Charge	—	—	14		$V_{DS} = 24V$
Q_{gd}	Gate-to-Drain ("Miller") Charge	—	—	23		$V_{GS} = 4.5V$, See Fig. 6 ②
$t_{d(on)}$	Turn-On Delay Time	—	9.0	—	ns	$V_{DD} = 15V$
t_r	Rise Time	—	210	—		$I_D = 32A$
$t_{d(off)}$	Turn-Off Delay Time	—	20	—		$R_G = 3.4\Omega, V_{GS} = 4.5V$
t_f	Fall Time	—	54	—		$R_D = 0.43\Omega$, ②③
L_S	Internal Source Inductance	—	7.5	—	nH	Between lead, and center of die contact
C_{iss}	Input Capacitance	—	1900	—		$V_{GS} = 0V$
C_{oss}	Output Capacitance	—	810	—		$V_{DS} = 25V$
C_{rss}	Reverse Transfer Capacitance	—	240	—		$f = 1.0\text{MHz}$, See Fig. 5
C_{iss}	Input Capacitance	—	3500	—		$V_{GS} = 0V, V_{DS} = 0V$

Body Diode & Schottky Diode Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_F (AV)	(Schottky)	—	—	2.0	A	MOSFET symbol showing the integral reverse p-n junction and Schottky diode. 
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	220		
V_{SD1}	Diode Forward Voltage	—	—	1.3	V	$T_J = 25^\circ\text{C}, I_S = 32A, V_{GS} = 0V$ ②
V_{SD2}	Diode Forward Voltage	—	—	0.50	V	$T_J = 25^\circ\text{C}, I_S = 1.0A, V_{GS} = 0V$ ②
t_{rr}	Reverse Recovery Time	—	51	77	ns	$T_J = 25^\circ\text{C}, I_F = 32A$
Q_{rr}	Reverse Recovery Charge	—	49	73	nC	$di/dt = 100A/\mu s$ ②
t_{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible (turn-on is dominated by L_S+L_D)				

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 10)
- ② Pulse width $\leq 300\mu s$; duty cycle $\leq 2\%$.
- ③ Uses IRL3103D1 data and test conditions

** When mounted on 1" square PCB (FR-4 or G-10 Material).
For recommended footprint and soldering techniques refer to application note #AN-994.

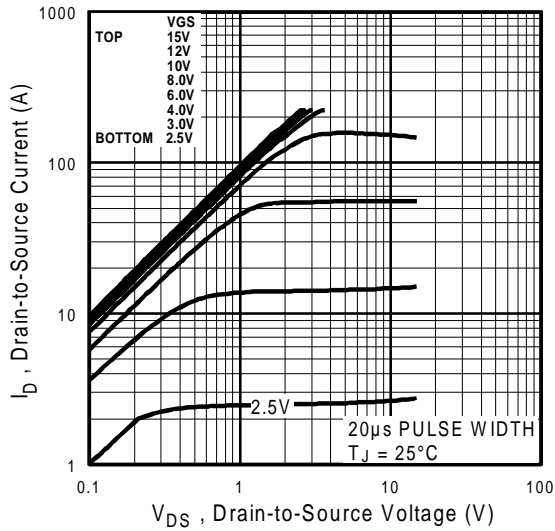


Fig 1. Typical Output Characteristics

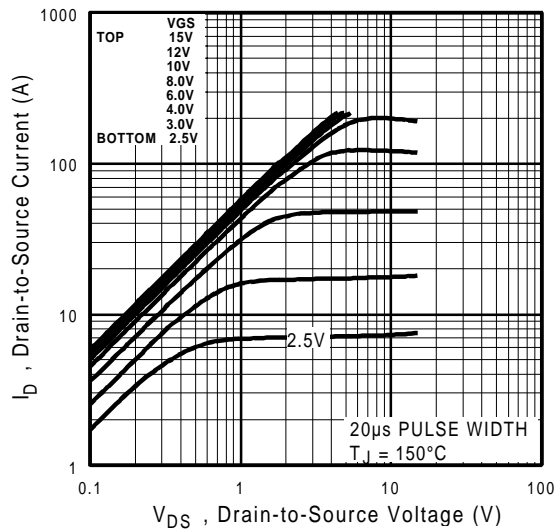


Fig 2. Typical Output Characteristics

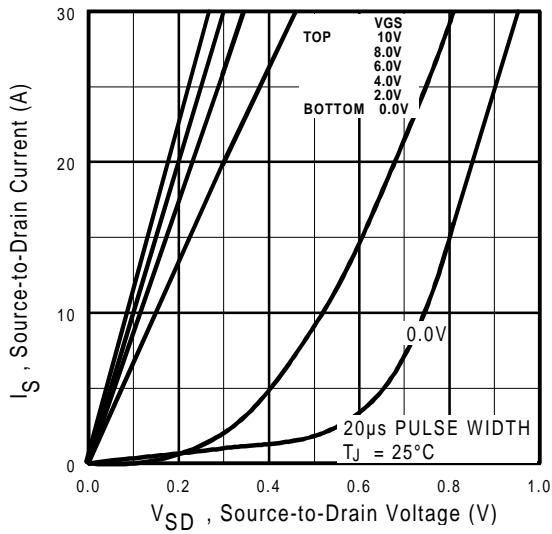


Fig 3. Typical Reverse Output Characteristics

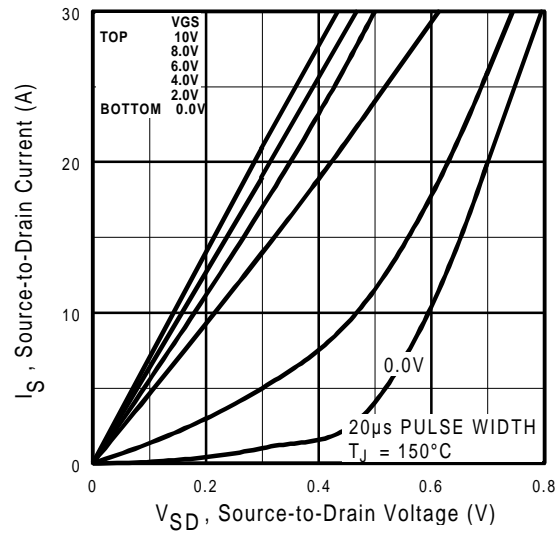


Fig 4. Typical Reverse Output Characteristics

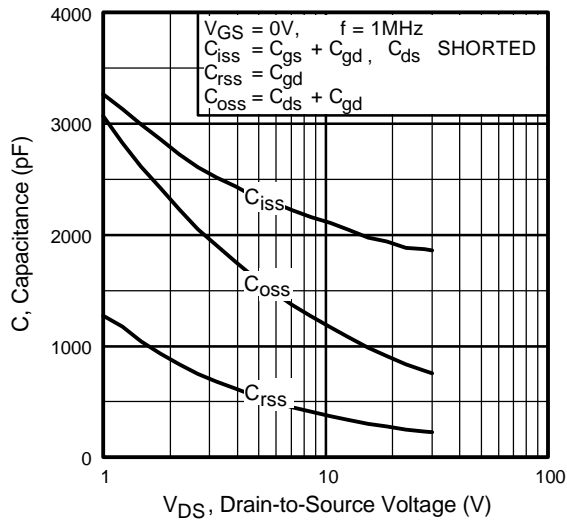


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

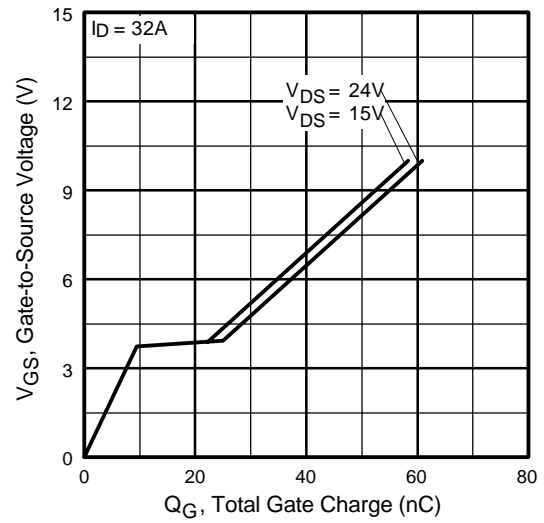


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

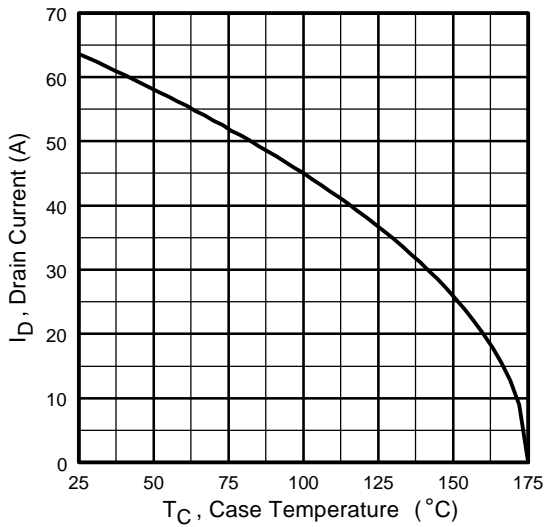


Fig 7. Maximum Drain Current Vs. Case Temperature

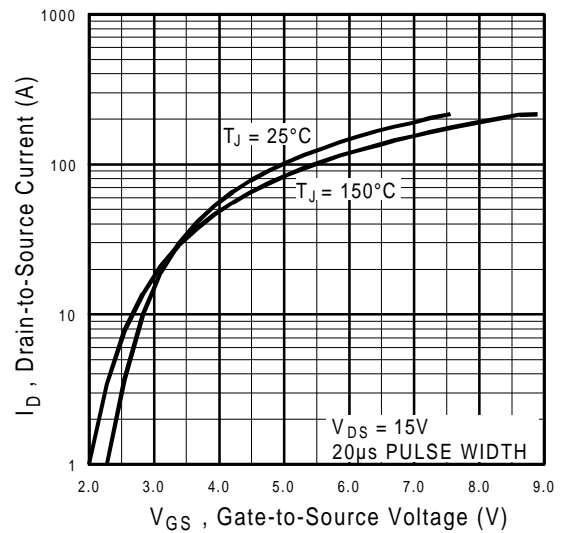


Fig 8. Typical Transfer Characteristics

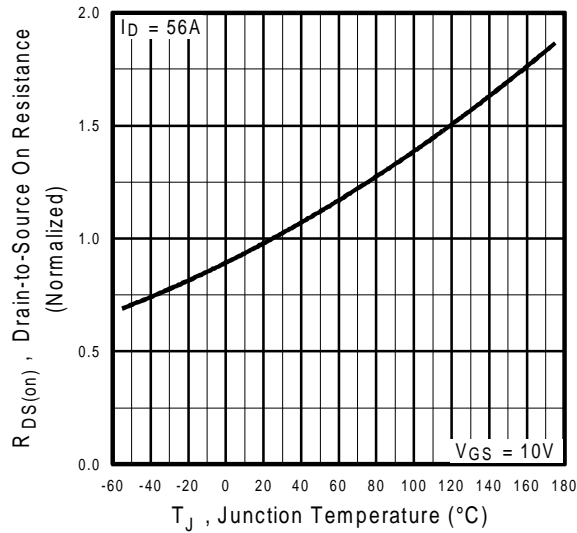


Fig 9. Normalized On-Resistance Vs. Temperature


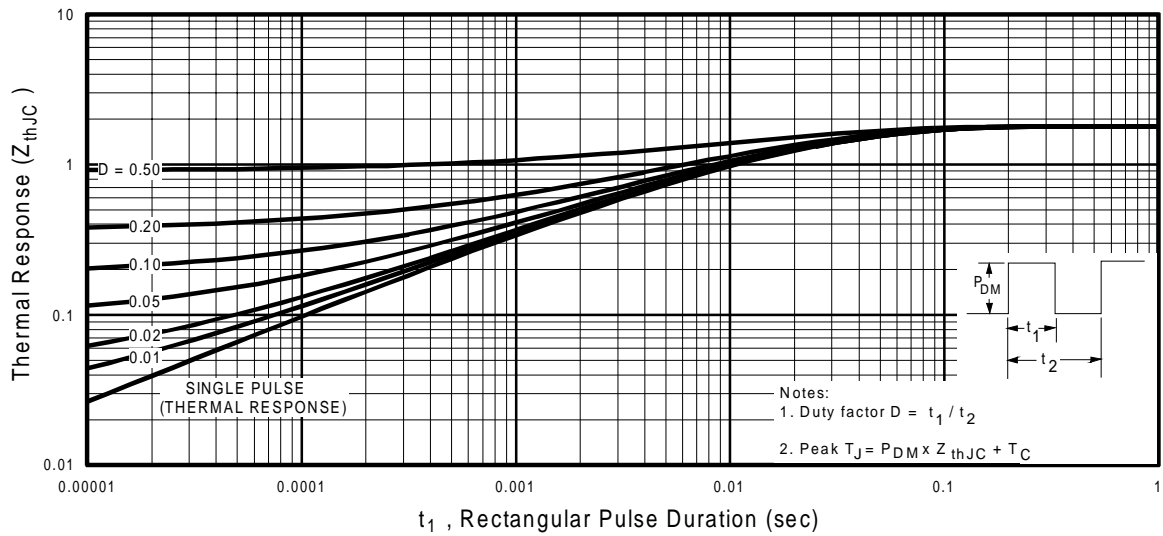


Fig 10. Maximum Effective Transient Thermal Impedance, Junction-to-Case

IRL3103D1S


International
IR Rectifier

D²Pak Package Outline

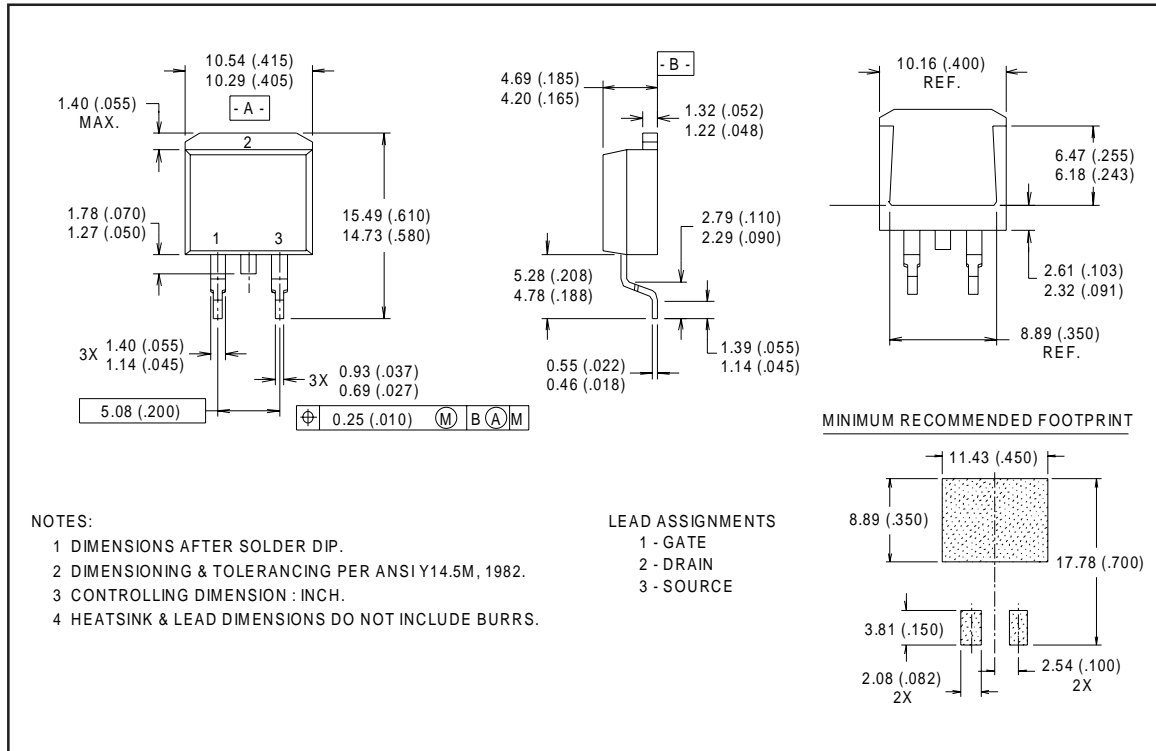


Part Marking Information

D²Pak

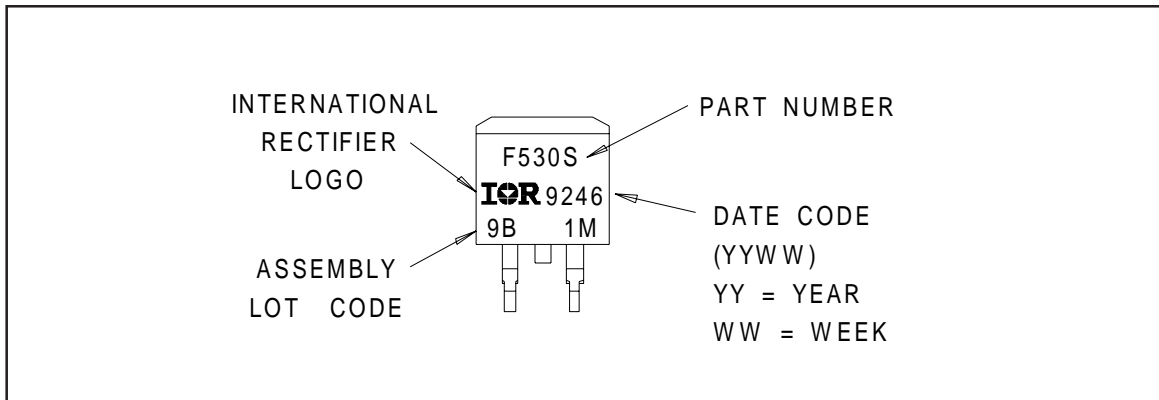

Tape & Reel Information

D²Pak

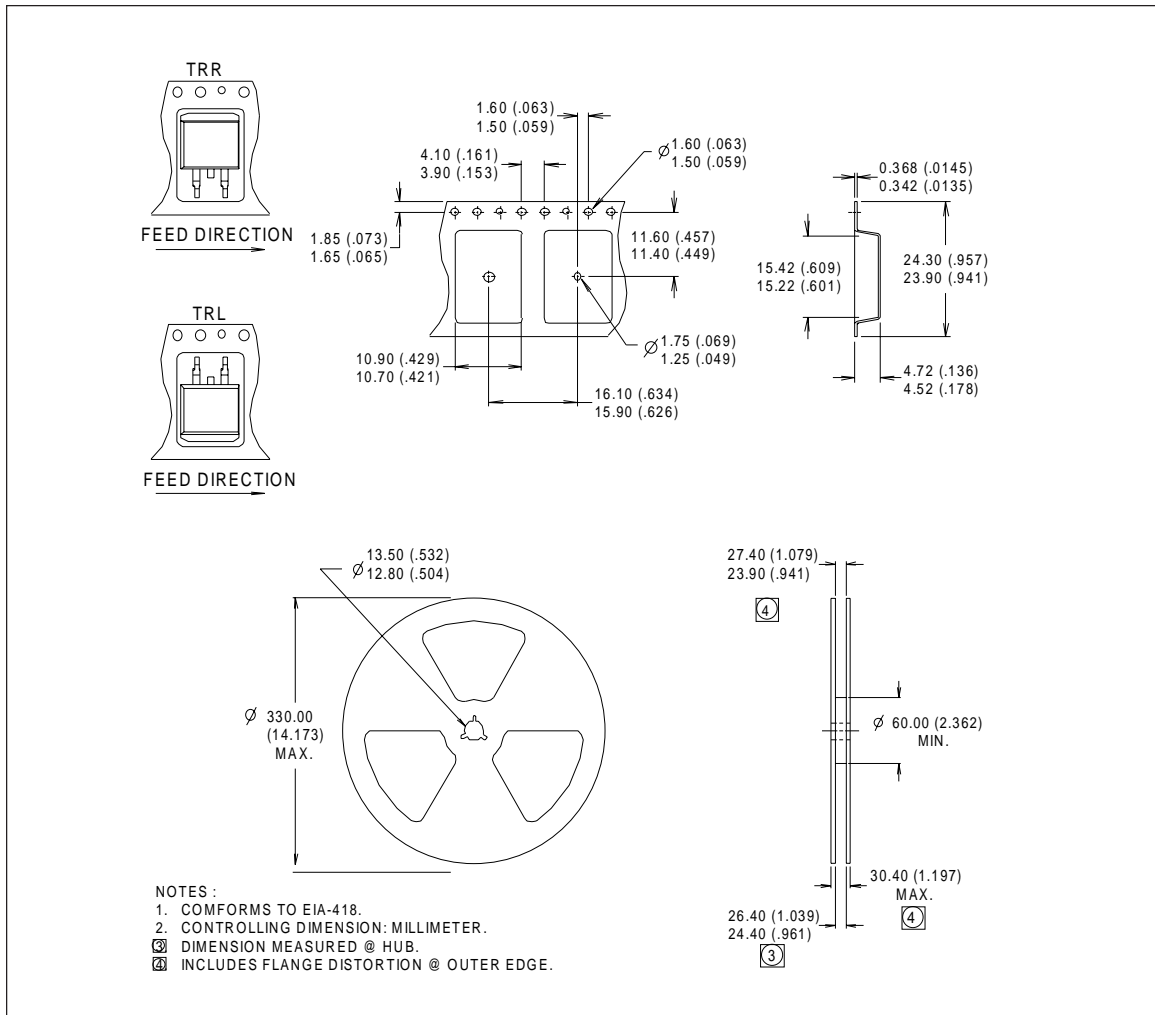



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.