

2SK808, 2SK808A

Silicon N-channel Power F-MOS FET

■ Features

- Low ON resistance $R_{DS(on)}$: $R_{DS(on)} = 4.7\Omega$ (typ.)
- High switching rate : $t_f = 40\text{ns}$ (typ.)
- No secondary breakdown
- High breakdown voltage


■ Application

- No contact relay
- Solenoid drive
- Motor drive
- Control equipment
- Switching power source

■ Absolute Maximum Ratings ($T_c = 25^\circ\text{C}$)










Item	Symbol	Value	Unit
Drain-source voltage	2SK808	800	V
	2SK808A	900	
Gate-source voltage	V_{GSS}	± 20	V
Drain current	DC	1	A
	Peak-to-peak value	3	
Power dissipation	$T_c = 25^\circ\text{C}$	45	W
	$T_a = 25^\circ\text{C}$	2.0	
Channel temperature	T_{ch}	150	$^\circ\text{C}$
Storage temperature	T_{stg}	$-55 \sim +150$	$^\circ\text{C}$

■ Package Dimensions

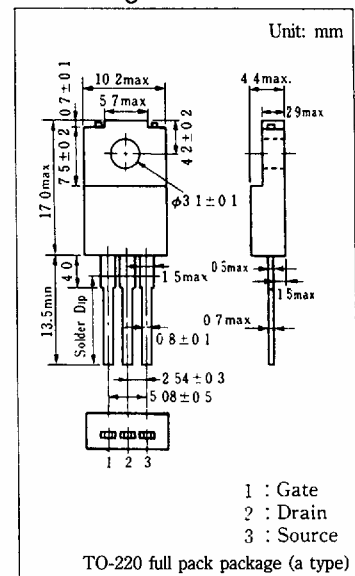

■ Electrical Characteristics ($T_c = 25^\circ\text{C}$)

Item	Symbol	Condition	min.	typ.	max.	Unit
Drain current	I_{DSS}	$V_{DS} = 640\text{V}, V_{GS} = 0$			0.1	mA
Gate-source current	I_{GSS}	$V_{GS} = \pm 20\text{V}, V_{DS} = 0$			± 1	μA
Drain-source voltage	V_{DSS}	$I_D = 1\text{mA}, V_{GS} = 0$	800			V
			900			
Gate threshold voltage	V_{th}	$V_{DS} = 25\text{V}, I_D = 1\text{mA}$	1		5	V
Drain-source ON resistance	$R_{DS(on)}$	$V_{GS} = 10\text{V}, I_D = 0.7\text{A}$		4.7	7.0	Ω
Forward transfer admittance	$ Y_{fs} $	$V_{DS} = 25\text{V}, I_D = 0.7\text{A}$	0.4	0.8		S
Input capacitance	C_{iss}	$V_{DS} = 20\text{V}, V_{GS} = 0, f = 1\text{MHz}$		380		pF
Output capacitance	C_{oss}				75	pF
Reverse transfer capacitance	C_{rss}				35	pF
Turn-on time	t_{on}				35	ns
Fall time	t_f	$V_{GS} = 10\text{V}, I_D = 0.7\text{A}$ $V_{DD} = 200\text{V}, R_L = 285\Omega$			40	ns
Delay time	$t_d(\text{off})$				70	ns

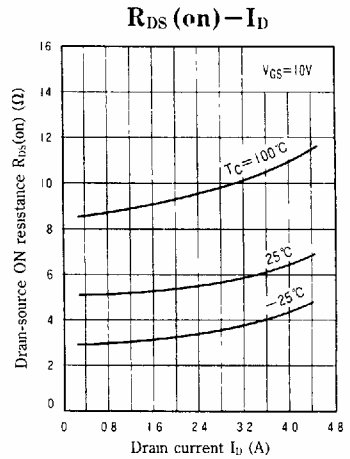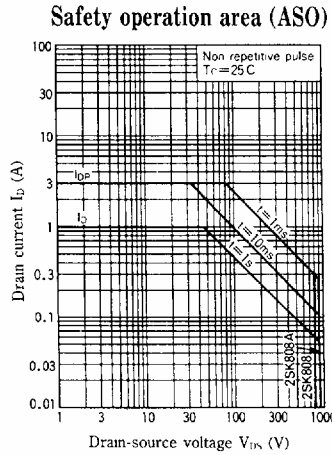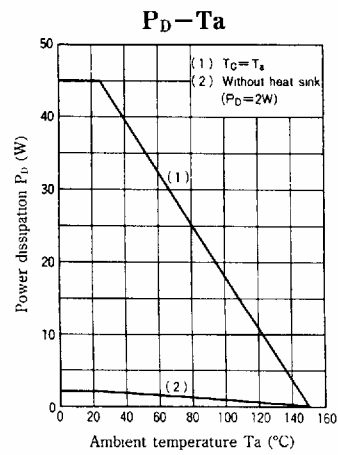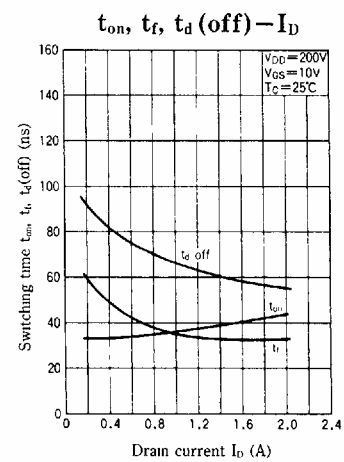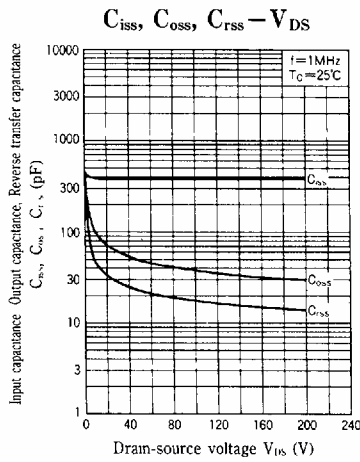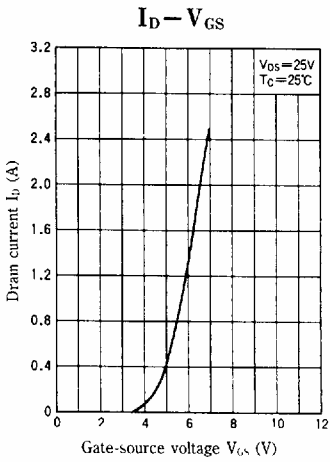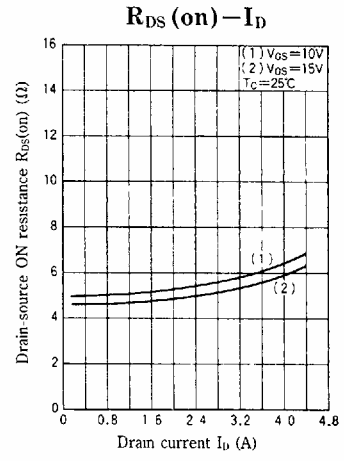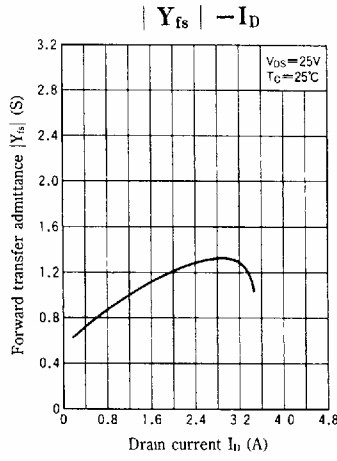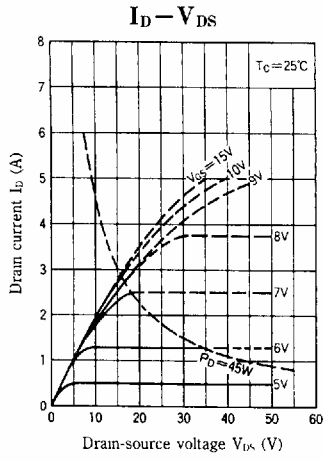

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.