



BC440
BC441

BC460
BC461

COMPLEMENTARY SILICON AF MEDIUM POWER AMPLIFIERS & SWITCHES



CASE TO-39

THE BC440, BC441, BC460, BC461 ARE SILICON PLANAR EPITAXIAL TRANSISTORS FOR AF DRIVERS AND OUTPUTS, AS WELL AS FOR SWITCHING APPLICATIONS UP TO 1 AMPERE. THE BC440, BC441 ARE NPN AND ARE COMPLEMENTARY TO THE PNP BC460, BC461 RESPECTIVELY.



ABSOLUTE MAXIMUM RATINGS

For p-n-p devices, voltage and current values are negative.

BC440(NPN) BC441(NPN)
BC460(PNP) BC461(PNP)

Collector-Emitter Voltage ($R_{BE} \leq 100 \Omega$)	V_{CER}	50V	75V
Collector-Emitter Voltage ($I_B=0$)	V_{CEO}	40V	60V
Emitter-Base Voltage	V_{EBO}	5V	5V
Collector Current	I_C		1A
Collector Peak Current	I_{CM}		2A
Total Power Dissipation ($T_C \leq 25^\circ C, V_{CE} \leq 10V$)	P_{tot}		10W
($T_A \leq 25^\circ C$)			1W
Operating Junction & Storage Temperature	T_j, T_{stg}	-55 to 200°C	

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ C$ unless otherwise noted)

PARAMETER	SYMBOL	BC440 BC460		BC441 BC461		UNIT	TEST CONDITIONS
		MIN	MAX	MIN	MAX		
Collector-Emitter Breakdown Voltage	V_{CEO}^*	40		60		V	$I_C=100mA, I_B=0$
Emitter-Base Breakdown Voltage	V_{EBO}	5		5		V	$I_E=0.1mA, I_C=0$
Collector Cutoff Current	I_{CBO}		100		100	nA	$V_{CB}=40V, I_E=0$
Collector Cutoff Current	I_{CER}		10		10	μA	$V_{CE}=50V, R_{BE}=100\Omega$
						μA	$V_{CE}=70V, R_{BE}=100\Omega$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}^*$		1		1	V	$I_C=1A, I_B=0.1A$
Base-Emitter Saturation Voltage	$V_{BE(sat)}^*$		1.5		1.5	V	$I_C=1A, I_B=0.1A$
D.C. Current Gain	H_{FE}^*	40	250	40	250	V	$I_C=500mA, V_{CE}=4V$
	Group 4	40	70	40	70		
	Group 5	60	130	60	130		
	Group 6	115	250	115	250		
		20					$I_C=1A, V_{CE}=2V$
Current Gain-Bandwidth Product	f_T	50		50		MHz	$I_C=50mA, V_{CE}=4V$
Collector-Base Capacitance	C_{ob}		25		25	pF	$V_{CB}=10V, I_E=0$
							$f=1MHz$





* Pulse Test : Pulse Width=0.3mS, Duty Cycle=1%

MICRO ELECTRONICS LTD.

38 HUNG TO ROAD, KWUN TONG, HONG KONG. TELEX 43510
KWUN TONG P. O. BOX69477 CABLE ADDRESS "MICROTRON" FAX: 3-410321
TELEPHONE:- 3-430181-6 3-893363, 3-892429

BC440 . BC441
BC460 . BC461

TYPICAL CHARACTERISTICS

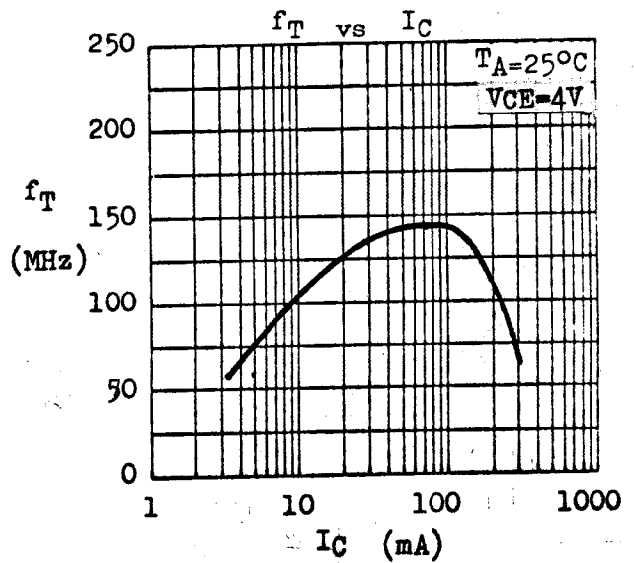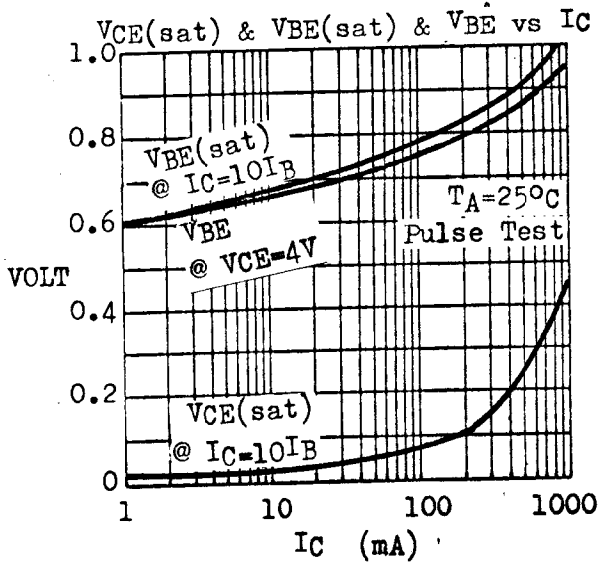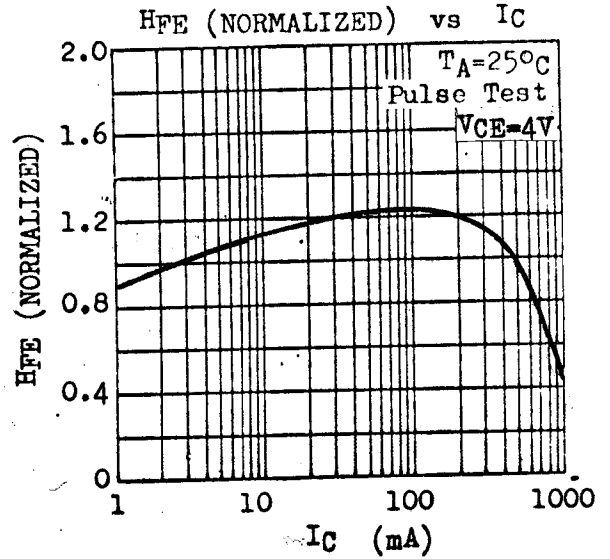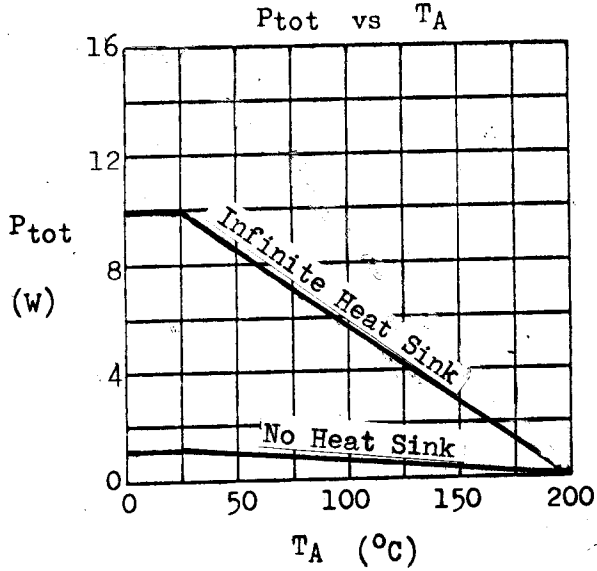

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.