

9097250 TOSHIBA (DISCRETE/OPTO)

99D 16689 DT-39-11



SEMICONDUCTOR

TECHNICAL DATA

TOSHIBA FIELD EFFECT TRANSISTOR
2SK526
SILICON N CHANNEL MOS TYPE
(π -MOS)

INDUSTRIAL APPLICATIONS

Unit in mm

HIGH SPEED, HIGH VOLTAGE SWITCHING APPLICATIONS.


DC-DC CONVERTER, MOTOR AND SOLENOID DRIVE APPLICATIONS.

FEATURES:

- Low Drain-Source ON Resistance : $R_{DS(ON)}=0.4\Omega$ (Typ.)
- High Forward Transfer Admittance: $|Y_{fs}|=4S$ (Typ.)
- High Drain Current : $I_{DP}=15A$ (Max.)
- Low Leakage Current: $I_{GSS}=\pm 100nA$ (Max.) @ $V_{GS}=\pm 20V$
 $I_{DSS}=1mA$ (Max.) @ $V_{DS}=250V$
- Enhancement-Mode : $V_{th}=1.5 \sim 3.5V$ @ $I_D=1mA$

MAXIMUM RATINGS ($T_a=25^\circ C$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Drain-Source Voltage		V_{DSX}	250	V
Gate-Source Voltage		V_{GSS}	± 20	V
Drain Current	DC	I_D	10	A
	Pulse	I_{DP}	15	
Drain Power Dissipation	$T_a=25^\circ C$	P_D	2.0	W
	$T_c=25^\circ C$		40	
Channel Temperature		T_{ch}	150	$^\circ C$
Storage Temperature Range		T_{stg}	$-55 \sim 150$	$^\circ C$

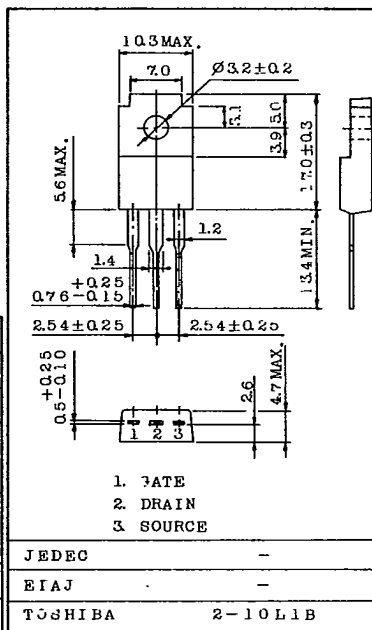

Weight : 2.1g

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0$	-	-	± 100	nA
Drain Cut-off Current		I_{DSS}	$V_{DS}=250V, V_{GS}=0$	-	-	1.0	mA
Drain-Source Breakdown Voltage		$V_{(BR)DSS}$	$I_D=10mA, V_{GS}=0$	250	-	-	V
Gate Threshold Voltage		V_{th}	$V_{DS}=10V, I_D=1mA$	1.5	-	3.5	V
Forward Transfer Admittance		$ Y_{fs} $	$V_{DS}=10V, I_D=5A$	2.0	4.0	-	S
Drain-Source ON Resistance		$R_{DS(ON)}$	$I_D=5A, V_{GS}=10V$	-	0.4	0.6	Ω
Drain-Source ON Voltage		$V_{DS(ON)}$	$I_D=10A, V_{GS}=10V$	-	4.5	7	V
Input Capacitance		C_{iss}	$V_{DS}=10V, V_{GS}=0, f=1MHz$	-	660	900	pF
Reverse Transfer Capacitance		C_{rss}	$V_{DS}=10V, V_{GS}=0, f=1MHz$	-	80	150	pF
Output Capacitance		C_{oss}	$V_{DS}=10V, V_{GS}=0, f=1MHz$	-	260	400	pF
Switching Time	Rise Time	t_r		-	50	100	ns
	Turn-on Time	t_{on}		-	70	140	
	Fall Time	t_f		-	60	120	
	Turn-off Time	t_{off}		-	160	320	

THIS TRANSISTOR IS THE ELECTROSTATIC SENSITIVE DEVICE. PLEASE HANDLE WITH CAUTION.

TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)







99D 16690 DT-3911



SEMICONDUCTOR

TECHNICAL DATA

2SK526

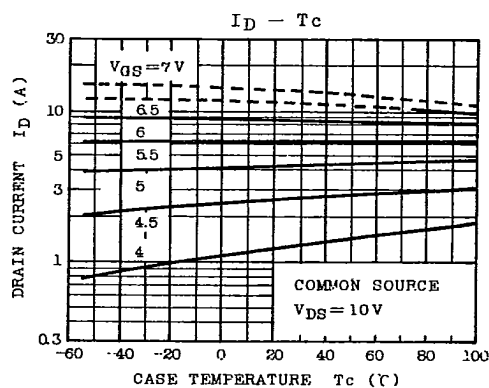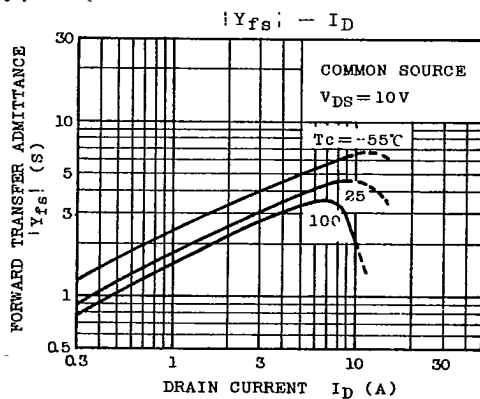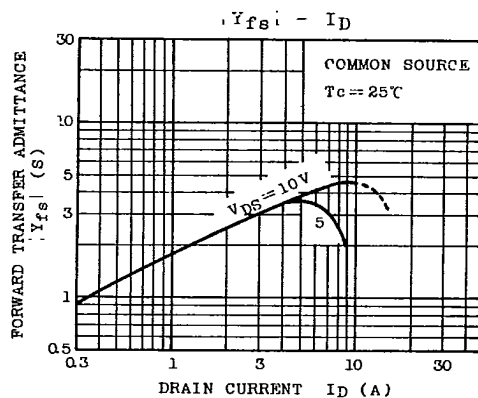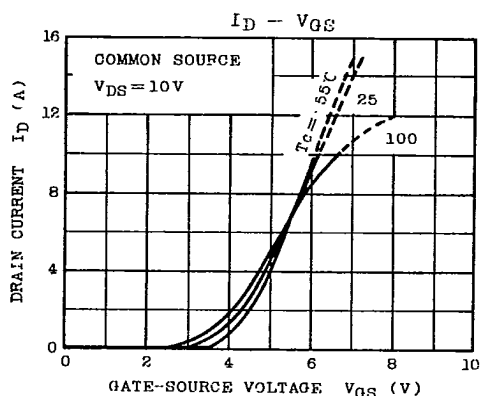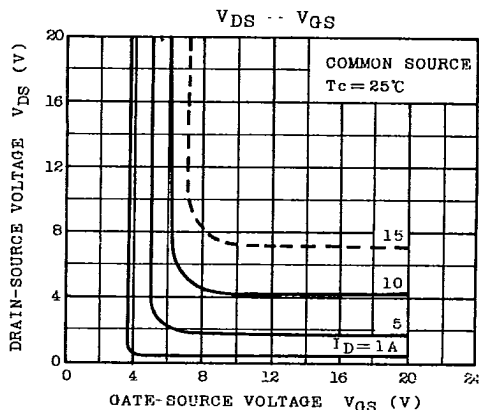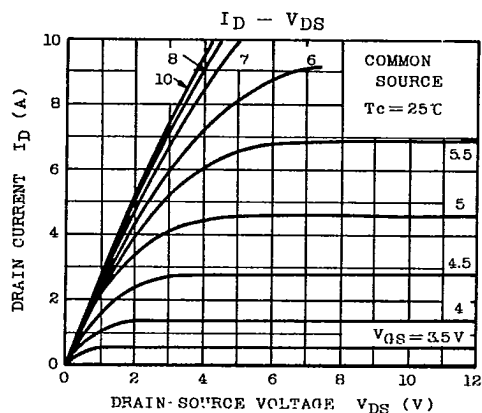

TOSHIBA CORPORATION

GT1A2A

- 59 -

9097250 TOSHIBA (DISCRETE/OPTO)







99D 16691 DT-39-11



SEMICONDUCTOR

TECHNICAL DATA

2SK526

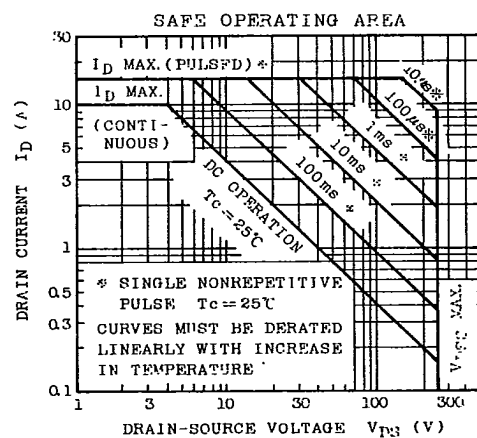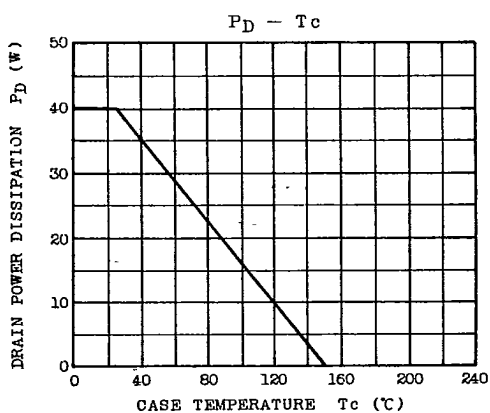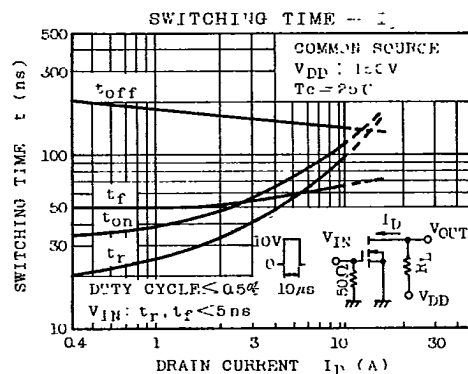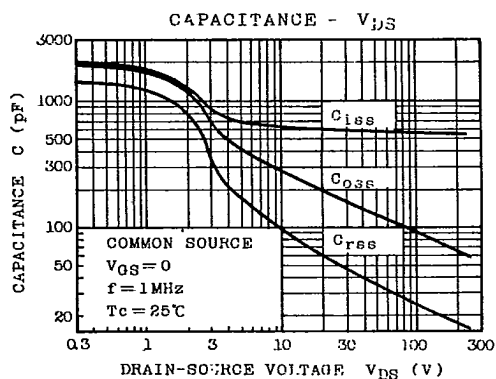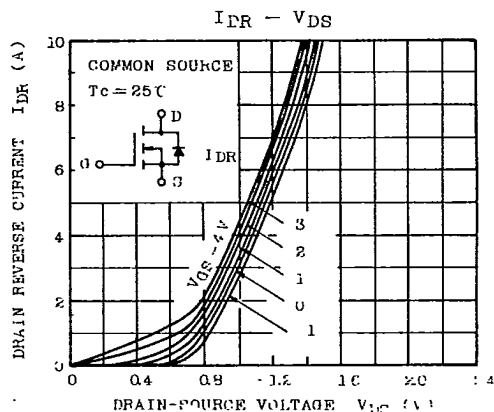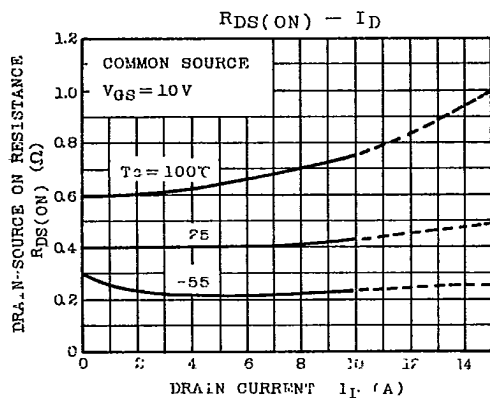

TOSHIBA CORPORATION

GT1A2A

- 60 -