

General purpose transistor (dual transistors)

EMZ7 / UMZ7N


● Features

- 1) Both a 2SA2018 chip and 2SC5585 chip in a EMT or UMT package.
- 2) Mounting possible with EMT3 or UMT3 automatic mounting machines.
- 3) Transistor elements are independent, eliminating interference.
- 4) Mounting cost and area can be cut in half.
- 5) Low $V_{CE(sat)}$


● Structure

NPN / PNP epitaxial planar silicon transistor

● Equivalent Circuit



● External dimensions (Units : mm)

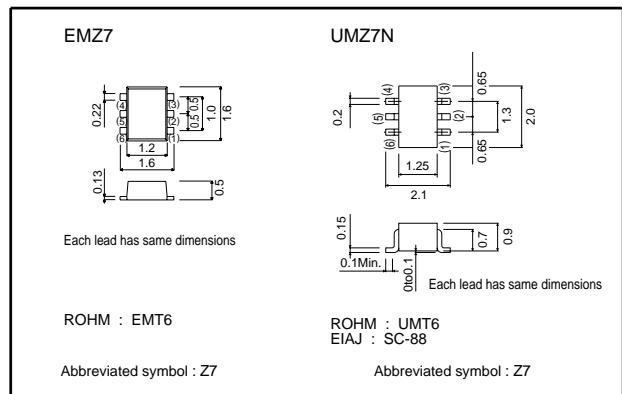

● Absolute maximum ratings ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Limits		Unit
		T_{r1}	T_{r2}	
Collector-base voltage	V_{CBO}	15	-15	V
Collector-emitter voltage	V_{CEO}	12	-12	V
Emitter-base voltage	V_{EBO}	6	-6	V
Collector current	I_C	500	-500	mA
Collector power dissipation	P_C	150(TOTAL)		mW *1
Junction temperature	T_j	150		$^\circ\text{C}$
Storage temperature	T_{stg}	-55--+150		$^\circ\text{C}$

*1 120mW per element must not be exceeded.

Transistors

● Electrical characteristics (Ta=25°C)

Tr1 (NPN)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV _{CB0}	15	–	–	V	I _C =10μA
Collector-emitter breakdown voltage	BV _{CEO}	12	–	–	V	I _C =1mA
Emitter-base breakdown voltage	BV _{EBO}	6	–	–	V	I _E =10μA
Collector cutoff current	I _{CB0}	–	–	0.1	μA	V _{CB} =15V
Emitter cutoff current	I _{EBO}	–	–	0.1	μA	V _{EB} =6V
Collector-emitter saturation voltage	V _{CE(sat)}	–	90	250	mV	I _C /I _B =200mA/10mA
DC current transfer ratio	h _{FE}	270	–	680	–	V _{CE} /I _C =2V/10mA
Transition frequency	f _T	–	320	–	MHz	V _{CE} =2V, I _C =10mA, f=100MHz
Output capacitance	C _{ob}	–	7.5	–	pF	V _{CB} =10V, I _E =0A, f=1MHz

Tr2 (PNP)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV _{CB0}	–15	–	–	V	I _C =–10μA
Collector-emitter breakdown voltage	BV _{CEO}	–12	–	–	V	I _C =–1mA
Emitter-base breakdown voltage	BV _{EBO}	–6	–	–	V	I _E =–10μA
Collector cutoff current	I _{CB0}	–	–	–0.1	μA	V _{CB} =–15V
Emitter cutoff current	I _{EBO}	–	–	–0.1	μA	V _{EB} =–6V
Collector-emitter saturation voltage	V _{CE(sat)}	–	–100	–250	mV	I _C /I _B =–200mA/–10mA
DC current transfer ratio	h _{FE}	270	–	680	–	V _{CE} /I _C =–2V/–10mA
Transition frequency	f _T	–	260	–	MHz	V _{CE} =–2V, I _C =10mA, f=100MHz
Output capacitance	C _{ob}	–	6.5	–	pF	V _{CB} =–10V, I _E =0A, f=1MHz

● Packaging specifications

Part No.	Packaging type	Taping	
	Code	TR	T2R
	Basic ordering unit (pieces)	3000	8000
UMZ7N	○	–	–
EMZ7	–	○	–

● Electrical characteristic curves

Tr1 (NPN)

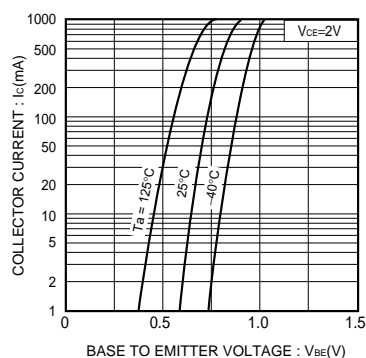


Fig.1 Grounded emitter propagation characteristics

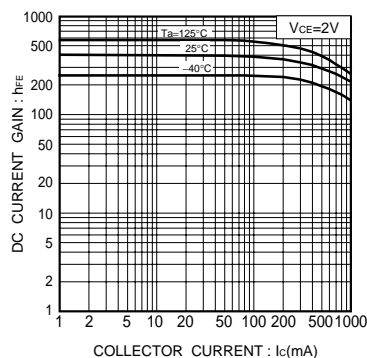


Fig.2 DC current gain vs. collector current

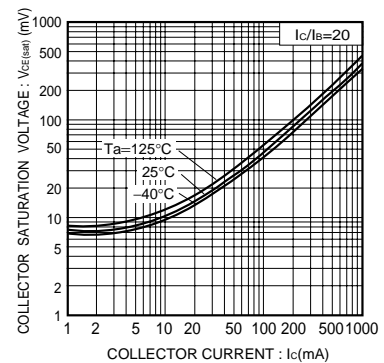


Fig.3 Collector-emitter saturation voltage vs. collector current (I)

Transistors

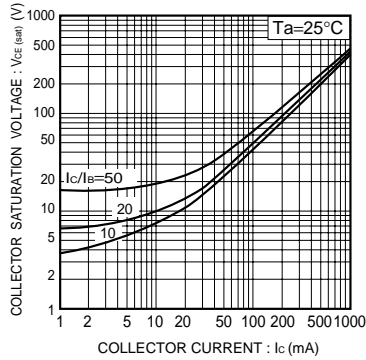


Fig.4 Collector-emitter saturation voltage vs. collector current (II)

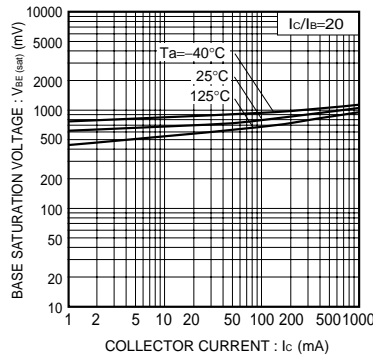


Fig.5 Base-emitter saturation voltage vs. collector current

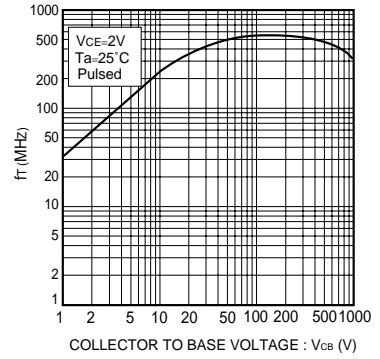


Fig.6 Collector output capacitance Emitter input capacitance vs. base voltage

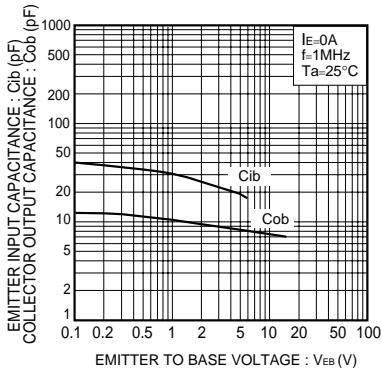


Fig.7 Collector output capacitance vs collector-base voltage Emitter input capacitance vs emitter-base voltage

T_{r2} (PNP)

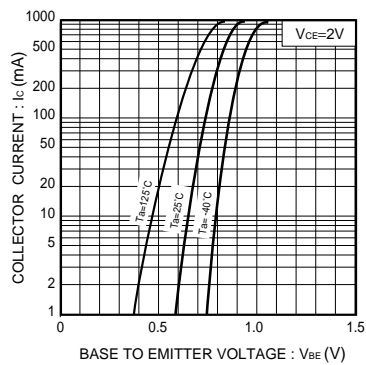


Fig.8 Grounded emitter propagation characteristics

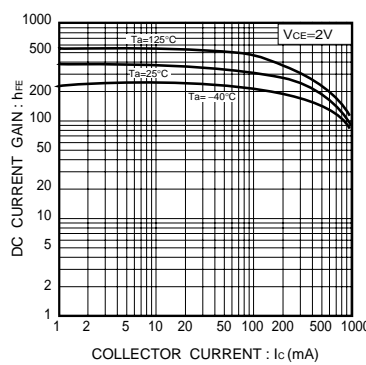


Fig.9 DC current gain vs. collector current

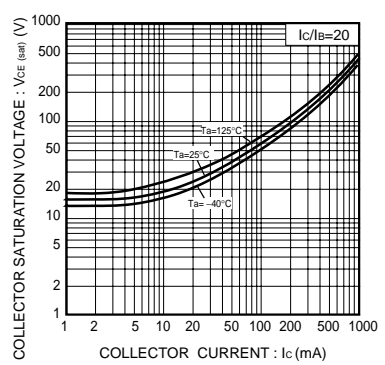


Fig.10 Collector-emitter saturation voltage vs. collector current (I)

Transistors

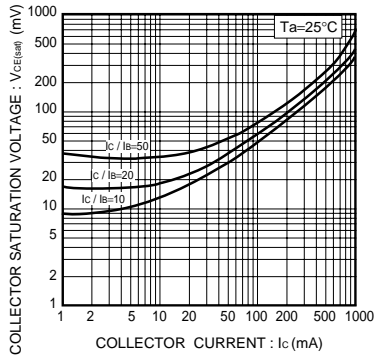


Fig.11 Collector-emitter saturation voltage vs. collector current

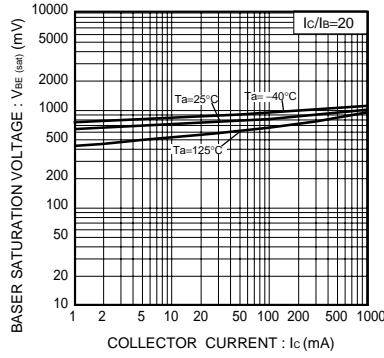


Fig.12 Base-emitter saturation voltage vs. collector current

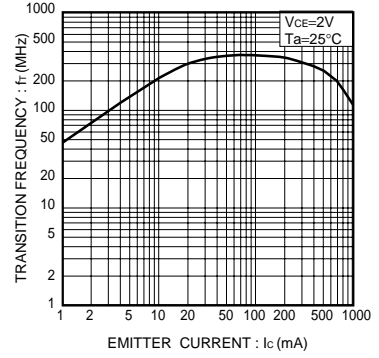


Fig.13 Gain bandwidth product vs. emitter current

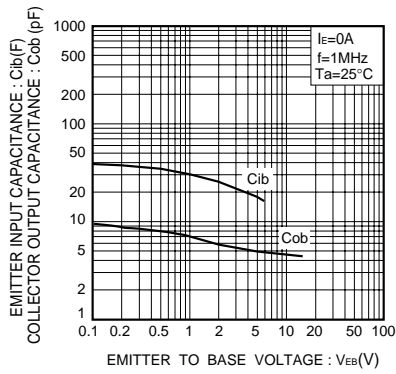


Fig.14 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.