


Digital transistor (built-in resistors)

DTC144VUA / DTC144VKA / DTC144VSA


●Features

- 1) Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors.
- 2) The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input, and parasitic effects are almost completely eliminated.
- 3) Only the on / off conditions need to be set for operation, making device design easy.
- 4) Higher mounting densities can be achieved.

●Equivalent circuit



●External dimensions (Units : mm)

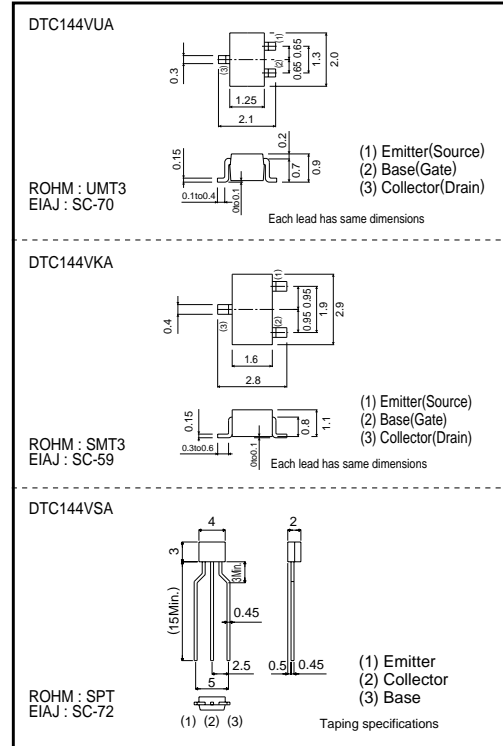

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit	
Supply voltage	V _{CC}	50	V	
Input voltage	V _i	-15~+40	V	
Output current	I _o	30	mA	
	I _{C(Max)}	100		
Power dissipation	DTC144VUA / DTC144VKA DTC144VSA	P _d	200	mW
		300		
Junction temperature	T _J	150	°C	
Storage temperature	T _{stg}	-55~+150	°C	

●Packaging, marking and packaging specifications

Type	DTC144VUA	DTC144VKA	DTC144VSA
Package	UMT3	SMT3	SPT
Marking	166	E66	-
Packaging code	T106	T146	TP
Basic ordering unit (pieces)	3000	3000	5000

●Electrical characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	V _{i(off)}	-	-	1	V	V _{CC} =5V, I _o =100μA
	V _{i(on)}	6	-	-		V _o =0.3V, I _o =2mA
Output voltage	V _{o(on)}	-	0.1	0.3	V	I _o =10mA, I _i =0.5mA
Input current	I _i	-	-	0.16	mA	V _i =5V
Output current	I _{o(off)}	-	-	0.5	μA	V _{CC} =50V, V _i =0V
DC current gain	G _i	33	-	-	-	I _o =5mA, V _o =5V
Input resistance	R _i	32.9	47	61.1	kΩ	-
Resistance ratio	R _z /R _i	0.17	0.21	0.26	-	-
Transition frequency	f _t	-	250	-	MHz	V _{CE} =10V, I _E =-5mA, f=100MHz *

* Transition frequency of the device.

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.