


SIEMENS AKTIENGESELLSCHAFT

**Main ratings**


Drain-source voltage  $V_{DS} = 800\text{ V}$   
 Continuous drain current  $I_D = 4,3\text{ A}$   
 Drain-source on-resistance  $R_{DS(on)} = 2,0\ \Omega$

N-Channel



**Description** SIPMOS, N-channel, enhancement mode  
**Case** Plastic package TO 238 AA with insulated metal base plate in accordance with JEDEC, compatible with TO 3; AMP plug-in connections.  
 Approx. weight 21 g

|        |                 |
|--------|-----------------|
| Type   | Ordering code   |
| BUZ 88 | C67078-A1609-A2 |

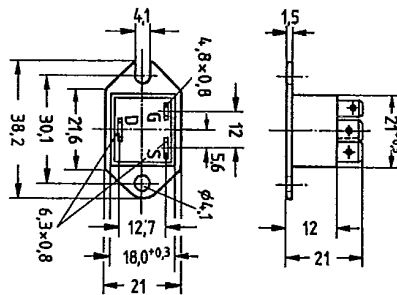

Dimensions in mm

**Maximum ratings**

| Description                             | Symbols     | Ratings          | Units             | Conditions                       |
|-----------------------------------------|-------------|------------------|-------------------|----------------------------------|
| Drain-source voltage                    | $V_{DS}$    | 800              | V                 |                                  |
| Drain-gate voltage                      | $V_{DGR}$   | 800              | V                 | $R_{GS} = 20\text{ k}\Omega$     |
| Continuous drain current                | $I_D$       | 4,3              | A                 | $T_C = 25\text{ }^\circ\text{C}$ |
| Pulsed drain current                    | $I_{Dpuls}$ | 17               | A                 | $T_C = 25\text{ }^\circ\text{C}$ |
| Gate-source voltage                     | $V_{GS}$    | $\pm 20$         | V                 |                                  |
| Max. power dissipation                  | $P_D$       | 83,3             | W                 | $T_C = 25\text{ }^\circ\text{C}$ |
| Operating and storage temperature range | $T_j$       | $-40 \dots +150$ | $^\circ\text{C}$  |                                  |
| Isolation test voltage                  | $V_{is}$    | 3500             | Vdc <sup>1)</sup> | $t = 1\text{ min}$               |
| DIN humidity category                   |             | F                | -                 | DIN 40040                        |
| IEC climatic category                   |             | 40/150/56        | -                 | DIN IEC 68-1                     |

**Thermal resistance**

Chip - case  $R_{thJC} \leq 1,5\text{ K/W}$

<sup>1)</sup> Isolation test voltage between drain and base plate referred to standard climate 23/50 in accordance with DIN 50014.

## SIEMENS AKTIENGESELLSCHAFT

**Electrical characteristics**(at  $T_j = 25^\circ\text{C}$  unless otherwise specified)

| Description | Symbol | Characteristics |      |      | Unit | Conditions |
|-------------|--------|-----------------|------|------|------|------------|
|             |        | min.            | typ. | max. |      |            |

**Static ratings**

|                                 |               |     |     |     |          |                                                                                           |
|---------------------------------|---------------|-----|-----|-----|----------|-------------------------------------------------------------------------------------------|
| Drain-source breakdown voltage  | $V_{(BR)DSS}$ | 800 | —   | —   | V        | $V_{GS} = 0V$<br>$I_D = 0,25mA$                                                           |
| Gate threshold voltage          | $V_{GS(th)}$  | 2,1 | 3,0 | 4,0 |          | $V_{DS} = V_{GS}$<br>$I_D = 1mA$                                                          |
| Zero gate voltage drain current | $I_{DSS}$     | —   | 20  | 250 | $\mu A$  | $T_j = 25^\circ\text{C}$<br>$T_j = 125^\circ\text{C}$<br>$V_{DS} = 800V$<br>$V_{GS} = 0V$ |
| Gate-source leakage current     | $I_{GSS}$     | —   | 10  | 100 | nA       | $V_{GS} = 20V$<br>$V_{DS} = 0V$                                                           |
| Drain-source on-resistance      | $R_{DS(on)}$  | —   | 1,7 | 2,0 | $\Omega$ | $V_{GS} = 10V$<br>$I_D = 3A$                                                              |


**Dynamic ratings**

|                                                             |              |     |     |     |    |                                       |
|-------------------------------------------------------------|--------------|-----|-----|-----|----|---------------------------------------|
| Forward transconductance                                    | $g_{fs}$     | 1,8 | 3,0 | —   | S  | $V_{DS} = 25V$<br>$I_D = 3A$          |
| Input capacitance                                           | $C_{iss}$    | —   | 3,9 | 5,0 | nF | $V_{GS} = 0V$                         |
| Output capacitance                                          | $C_{oss}$    | —   | 200 | 350 | pF | $V_{DS} = 25V$<br>$f = 1MHz$          |
| Reverse transfer capacitance                                | $C_{rss}$    | —   | 80  | 140 |    |                                       |
| Turn-on time $t_{on}$<br>( $t_{on} = t_{d(on)} + t_r$ )     | $t_{d(on)}$  | —   | 60  | 90  | ns | $V_{CC} = 30V$<br>$I_D = 2,5A$        |
|                                                             | $t_r$        | —   | 90  | 140 |    |                                       |
| Turn-off time $t_{off}$<br>( $t_{off} = t_{d(off)} + t_f$ ) | $t_{d(off)}$ | —   | 330 | 430 |    | $V_{GS} = 10V$<br>$R_{GS} = 50\Omega$ |
|                                                             | $t_f$        | —   | 110 | 140 |    |                                       |


**Reverse diode**

|                                  |           |   |      |     |         |                                                                  |
|----------------------------------|-----------|---|------|-----|---------|------------------------------------------------------------------|
| Continuous reverse drain current | $I_{DR}$  | — | —    | 4,3 | A       | $T_C = 25^\circ\text{C}$                                         |
| Pulsed reverse drain current     | $I_{DRM}$ | — | —    | 17  |         |                                                                  |
| Diode forward on-voltage         | $V_{SD}$  | — | 1,1  | 1,4 | V       | $I_F = 2 \times I_{DR}$<br>$V_{GS} = 0V, T_j = 25^\circ\text{C}$ |
| Reverse recovery time            | $t_{rr}$  | — | 1800 | —   | ns      | $T_j = 25^\circ\text{C}$                                         |
| Reverse recovery charge          | $Q_{rr}$  | — | 25   | —   | $\mu C$ | $I_F = I_{DR}$<br>$dI_F/dt = 100A/\mu s$<br>$V_R = 100V$         |


Power dissipation  $P_D = f(T_C)$

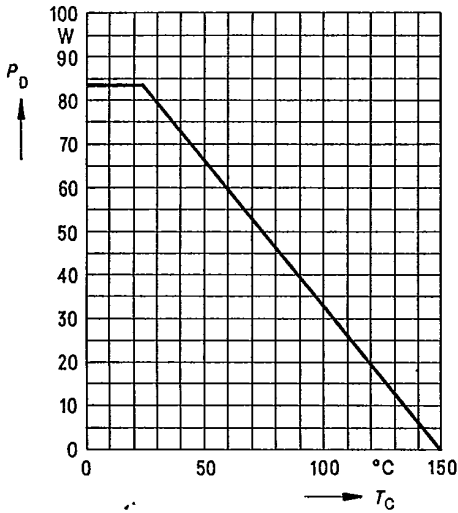


Typical output characteristics  $I_D = f(V_{DS})$   
parameter: 80  $\mu$ s pulse test,  
 $T_J = 25^\circ\text{C}$

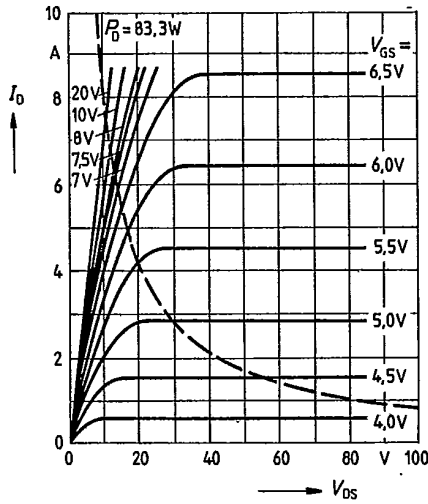

Safe operating area  $I_D = f(V_{DS})$   
parameter:  $D = 0.01$ ,  $T_C = 25^\circ\text{C}$

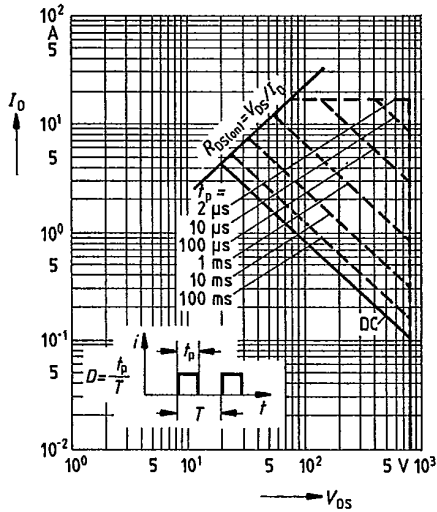


Typical transfer characteristic  $I_D = f(V_{GS})$   
parameter: 80  $\mu$ s pulse test,  
 $V_{DS} = 25\text{V}$ ,  $T_J = 25^\circ\text{C}$

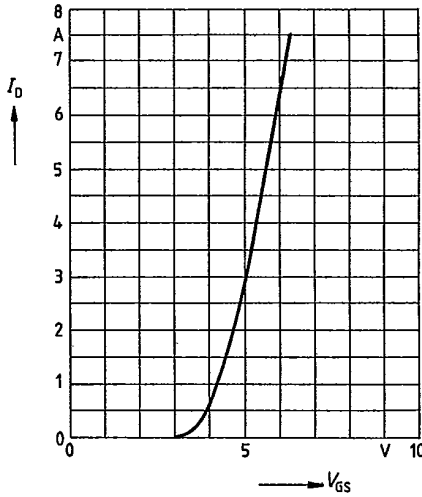

SIEMENS AKTIENGESELLSCHAFT


Typical drain-source on-state resistance

$R_{DS(on)} = f(I_D)$   
parameter:  $V_{GS}$ ;  $T_j = 25^\circ\text{C}$

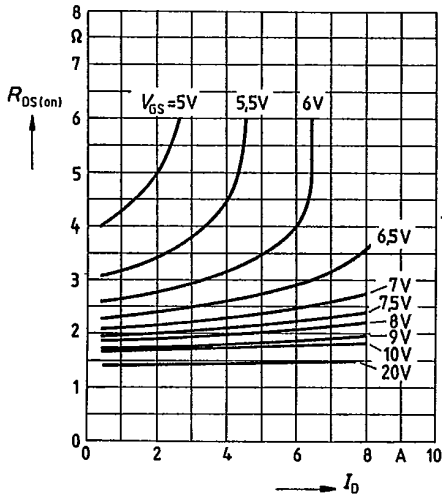


Drain-source on-state resistance

$R_{DS(on)} = f(T_j)$   
parameter:  $I_D = 3\text{A}$ ,  $V_{GS} = 10\text{V}$   
(spread)

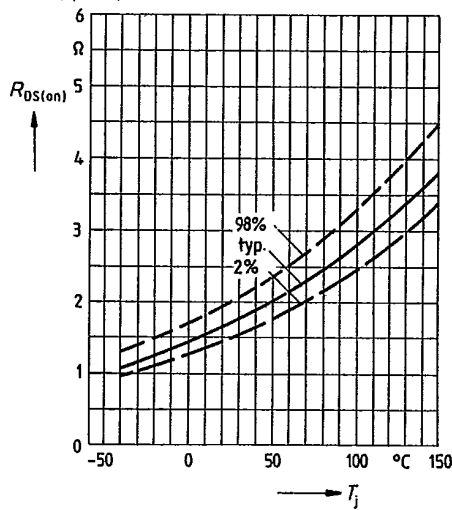


Typical transconductance  $g_{fs} = f(I_D)$

parameter: 80  $\mu\text{s}$  pulse test,  
 $V_{DS} = 25\text{V}$ ,  $T_j = 25^\circ\text{C}$

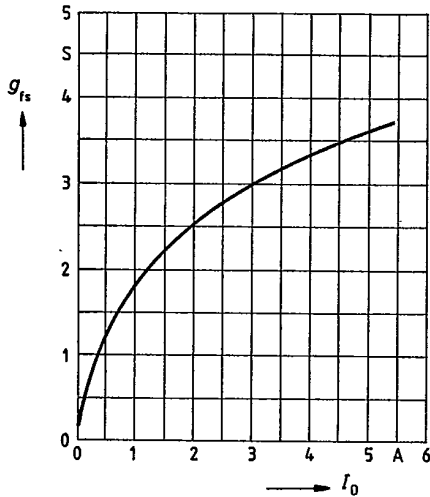


Gate threshold voltage  $V_{GS(th)} = f(T_j)$

parameter:  $V_{DS} = V_{GS}$ ,  $I_D = 1\text{mA}$   
(spread)

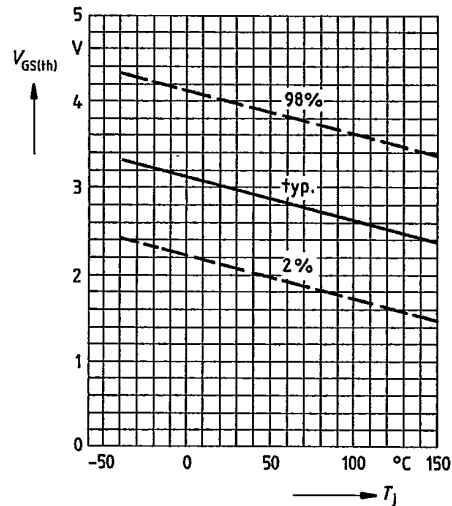


SIEMENS AKTIENGESELLSCHAFT

Typical capacitances  $C = f(V_{GS})$   
parameter:  $V_{GS} = 0, f = 1\text{MHz}$

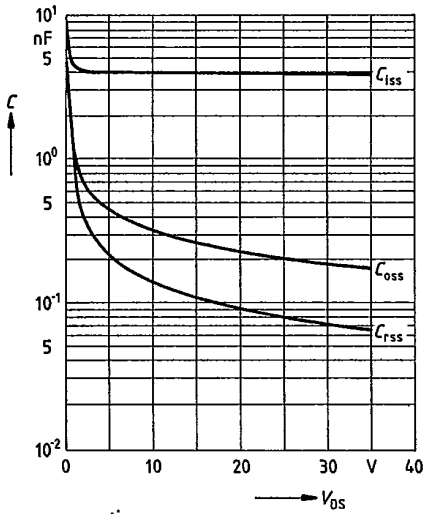


Continuous drain current  $I_D = f(T_C)$   
parameter:  $V_{GS} \geq 10\text{V}$

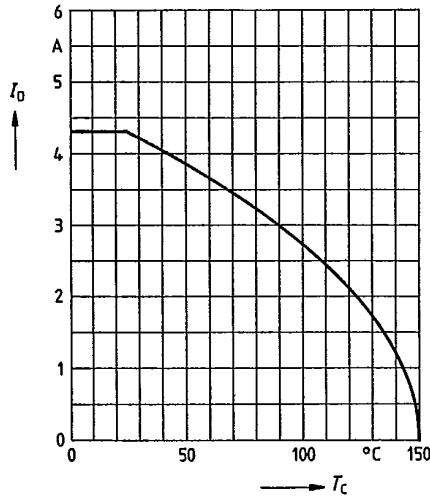

Forward characteristic of reverse diode

$I_F = f(V_{SD})$   
parameter:  $T_j, t_p = 80 \mu\text{s}$   
(spread)

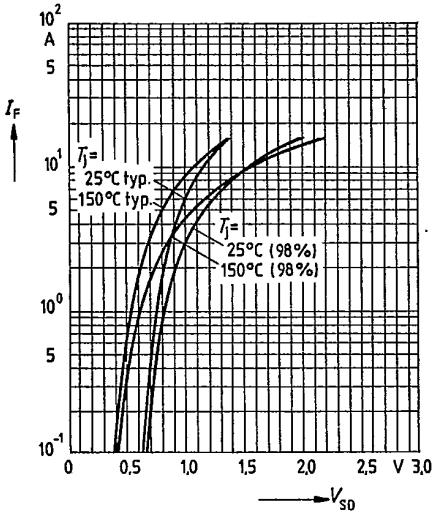


542


1124

C-13

Transient thermal impedance  $Z_{thJC} = f(t)$   
 parameter:  $D = t_p/T$

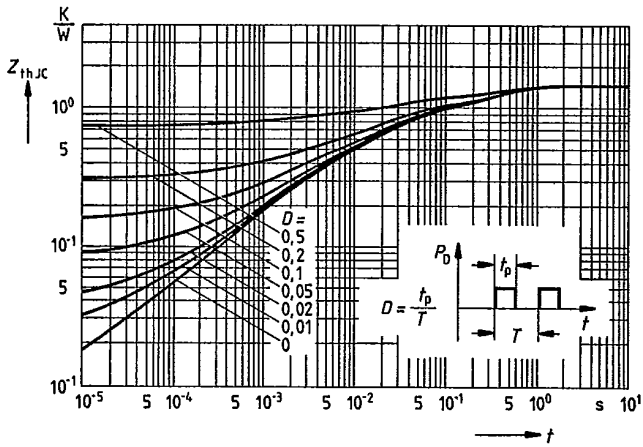

Typical gate-charge  $V_{GS} = f(Q_{Gate})$   
 parameter:  $I_{D,puls} = 9A$

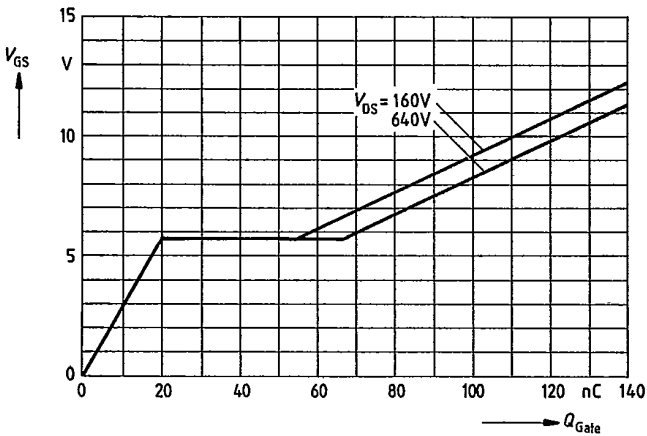



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.