

2N4033

Features

- Meets MIL-S-19500/512
- Collector-Base Voltage 80V
- Collector Current: 1.0 A
- Fast Switching 250 nS


**80 Volts
1.0 Amps**

**PNP
BIPOLAR
TRANSISTOR**

Maximum Ratings

RATING	SYMBOL	MAX.	UNIT
Collector-Emitter Voltage	V_{CEO}	-80	Vdc
Collector-Base Voltage	V_{CBO}	-80	Vdc
Emitter-Base Voltage	V_{EBO}	-5.0	Vdc
Collector Current--Continuous	I_C	-1.0	Adc
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	0.8 4.56	W mW/°C
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	4.0 22.8	W mW/°C
Operating Temperature Range	T_J	-55 to +200	°C
Storage Temperature Range	T_S	-55 to +200	°C
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	140	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	25	°C/W

Mechanical Outline

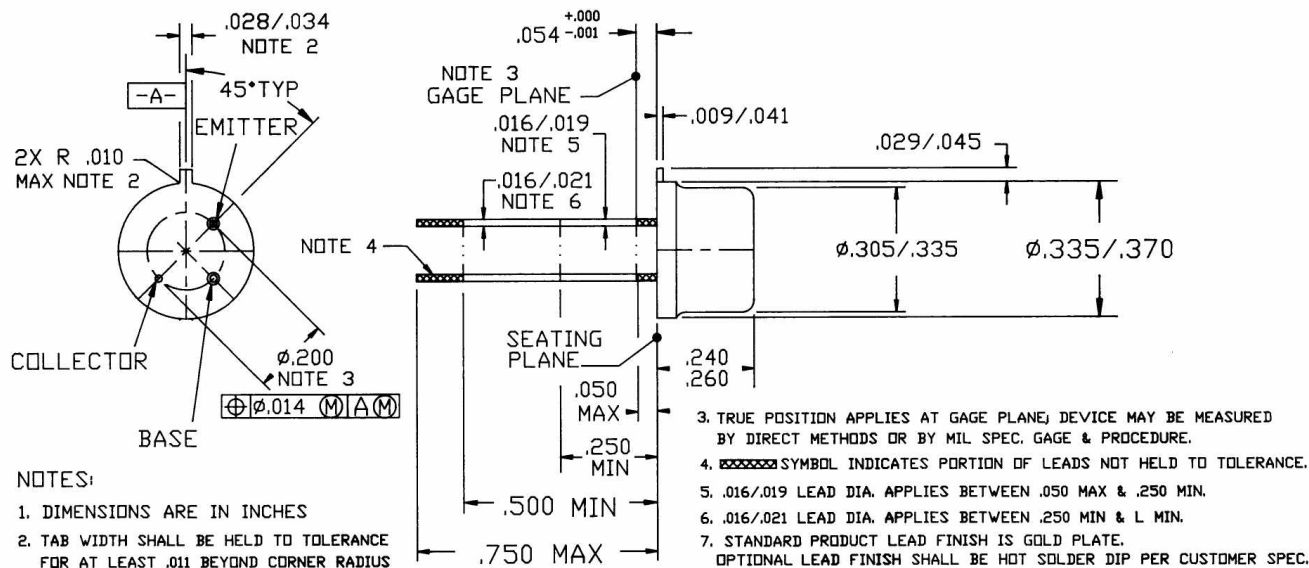

2N4033

Electrical Parameters (T_A @ 25°C unless otherwise specified)

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Off Characteristics					
Collector-Emitter Breakdown Voltage(1) (I _C = -10 mA)	BV_{CEO}	-80		--	V
Collector-Base Breakdown Voltage (I _C = -10 μA)	BV_{CB0}	-80		--	V
Emitter-Base Breakdown Voltage (I _E = -10 uA)	BV_{EBO}	-5.0		--	V
Collector Cutoff Current (V _{CB} = -60 V) (V _{CB} = -60 V, T _A = 150°C)	I_{CBO}	--		-10 -25	nA uA
Emitter Cutoff Current (V _{EB} = -3.0 V)	I_{EBO}	--		-25	nA
D.C. Current Gain (I _C = -500 mA, V _{CE} = -5.0 V @ -55°C)(1) (I _C = -100 μA, V _{CE} = -5.0 V) (I _C = -100 mA, V _{CE} = -5.0 V)(1) (I _C = -500 mA, V _{CE} = -5.0 V)(1) (I _C = -1.0 A, V _{CE} = -5 V)(1)	h_{FE}	30 50 100 70 25		-- -- 300 -- --	--
Collector-Emitter Saturation Voltage(1) (I _C = -150 mA, I _B = -15 mA) (I _C = -500 mA, I _B = -50 mA) (I _C = -1.0A, I _B = -100mA)	V_{CE(Sat)}	-- -- --		-0.15 -0.50 1.0	V
Base-Emitter Saturation Voltage(1) (I _C = -150 mA, I _B = -15 mA)	V_{BE(Sat)}	--		-0.9	V
Base-Emitter On Voltage (I _C = -500 mA, V _{CE} = -0.5 V)(1)	V_{BE(Sat)}	--		-1.2	V
Output Capacitance (V _{CE} = -10 V, 100kHz ≤ f ≤ 1.0MHz)	C_{OBO}	--		20	pF
Input Capacitance (V _{CE} = -0.5 V, 100kHz ≤ f ≤ 1.0 MHz)	C_{IBo}	--		80	pF
Small Signal Current Gain (I _C = -50 mA, V _{CE} = -10 V, f = 100 MHz)	/h_{fe}/	1.5		6.0	
Switching Speeds					ns
Delay Time (I _c = 500mAdc; I _B = 50mAdc)	t_d	--		15	
Rise Time (I _c = 500mAdc; I _B = 50mAdc)	t_r	--		25	
Storage Time (I _c = 500mAdc; I _{B1} = I _{B2} = 50mAdc)	t_s	--		175	
Fall Time (I _c = 500mAdc; I _{B1} = I _{B2} = 50mAdc)	t_f	--		35	



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.