

2N3700

Features

- Meets MIL-S-19500/391
- Collector-Base Voltage 140V
- Fast Switching 30 nS


**140 Volts
1 Amp**

**NPN
BIPOLAR
TRANSISTOR**

Maximum Ratings

RATING	SYMBOL	MAX.	UNIT
Collector-Emitter Voltage	V_{CE0}	80	Vdc
Collector-Base Voltage	V_{CB0}	140	Vdc
Emitter-Base Voltage	V_{EB0}	7.0	Vdc
Total Device Dissipation @ TA = 25°C Derate above 25°C	P_D	0.5 2.85	Watts mW/°C
Total Device Dissipation @ TA = 25°C Derate above 25°C	P_D	1.8 10.3	Watts mW/°C
Operating Temperature Range	T_J	-55 to +175	°C
Storage Temperature Range	T_s	-55 to +175	°C
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	300	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83	°C/W

Mechanical Outline

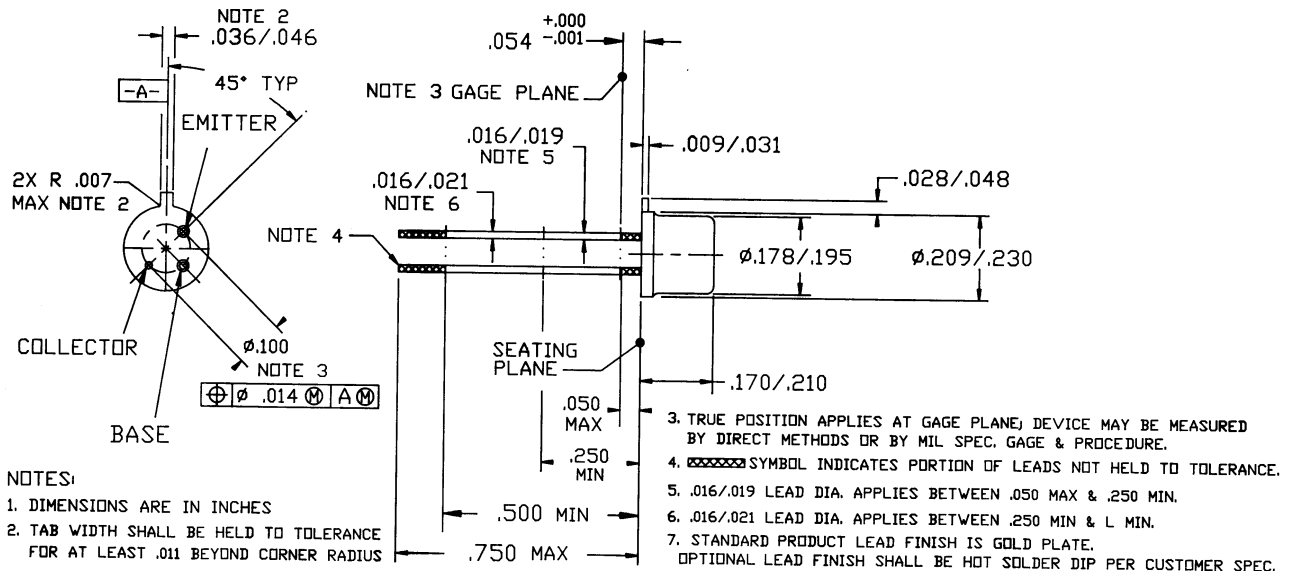

2N3700

Electrical Parameters (T_A @ 25°C unless otherwise specified)

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Off Characteristics					
Collector-Emitter Breakdown Voltage (I _C = 30 mA _{dc} , I _B = 0)	BV_{CEO}	80		--	V _{dc}
Collector-Base Breakdown Voltage (I _C = 100 μA _{dc} , I _E = 0)	BV_{CEO}	140		--	V _{dc}
Emitter-Base Breakdown Voltage (I _E = 100 μA _{dc} , I _C = 0)	BV_{EBO}	7.0		--	V _{dc}
Collector Cutoff Current (V _{CB} = 90 V _{dc} , I _E = 0) (V _{CB} = 90 V _{dc} , I _E = 0, T _A = + 150°C)	I_{CES}	--		0.01 10	μA _{dc}
Emitter Cutoff Current (V _{EB} = 5.0 V _{dc} , I _C = 0)	I_{EBO}	--		10	nA _{dc}
D.C. Current Gain (I _C = 0.1 mA _{dc} , V _{CE} = 10 V _{dc}) (I _C = 10 mA _{dc} , V _{CE} = 10 V _{dc})(1) (I _C = 150 mA _{dc} , V _{CE} = 10 V _{dc})(1) (I _C = 150 mA _{dc} , V _{CE} = 10 V _{dc} , T _C = -55°C)(1) (I _C = 500 mA _{dc} , V _{CE} = 10 V _{dc})(1) (I _C = 1.0 mA _{dc} , V _{CE} = 10 V _{dc})	h_{FE}				--
Collector-Emitter Saturation Voltage(1) (I _C = 150 mA _{dc} , I _B = 15 mA _{dc}) (I _C = 500 mA _{dc} , I _B = 50 mA _{dc})	V_{CE(Sat)}	--		0.2 0.5	V _{dc}
Base-Emitter Saturation Voltage(1) (I _C = 150 mA _{dc} , I _B = 15 mA _{dc})	V_{BE(Sat)}	--		1.1	V _{dc}
Small-signal short circuit forward current transfer ratio (I _C = 50 mA _{dc} , V _{CE} = 10 V _{dc} , f = 20 MHz)	/h_{fe}/	5		20	
Output Capacitance (V _{CB} = 10 V _{dc} , I _E = 0, 100kHz ≤ f ≤ 1MHz)	C_{OBO}	--		12	pf
Input Capacitance (V _{EB} = 0.5 V _{dc} , I _C = 0, 100kHz ≤ f ≤ 1MHz)	C_{IBo}	--		60	pf
Small—Signal Current Gain (I _C = 1.0 mA _{dc} , V _{CE} = 5.0 V _{dc} , f = 1.0 MHz)	h_{fe}	80		400	--
Collector Base Time Constant (I _E = 10 mA _{dc} , V _{CB} = 10 V _{dc} , f = 79.8 MHz)	rb'C_C			400	ps
Noise Figure (I _C = 100 μA _{dc} , V _{CE} = 10 V _{dc} , R _g = 1.0 k ohms, f = 200Hz)	NF	--		4	dB

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 1.0%.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.