

PNP MEDIUM POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/561

Devices

2N6193

Qualified Level

**JAN, JANTX
JANTXV**

MAXIMUM RATINGS


Ratings	Symbol	2N6193	Units
Collector-Emitter Voltage	V_{CEO}	100	Vdc
Collector-Base Voltage	V_{CBO}	100	Vdc
Emitter-Base Voltage	V_{EBO}	6.0	Vdc
Collector Current	I_C	5.0	Adc
Base Current	I_B	1.0	Adc
Total Power Dissipation	P_T	@ $T_A = +25^{\circ}\text{C}^{(1)}$	1.0
		@ $T_C = +25^{\circ}\text{C}^{(2)}$	10
Operating & Storage Temperature Range	T_{op}, T_{stg}	-65 to +200	$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	17.5	$^{\circ}\text{C}/\text{W}$

1) Derate linearly $5.71\text{mW}/^{\circ}\text{C}$ for $T_A > +25^{\circ}\text{C}$

2) Derate linearly $57.1\text{mW}/^{\circ}\text{C}$ for $T_C > +25^{\circ}\text{C}$

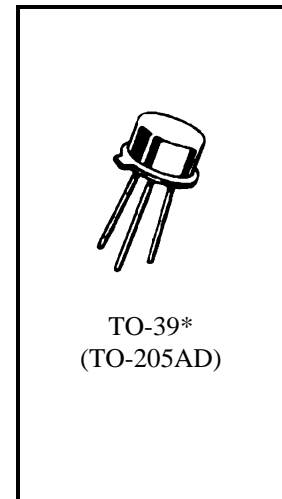

*See appendix A for package outline

ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage $I_C = 50\text{ mAdc}$	$V_{CEO(sus)}$	100		Vdc
Collector-Emitter Cutoff Current $V_{CE} = 100\text{ Vdc}$	I_{CEO}		100	μAdc
Emitter-Base Cutoff Current $V_{EB} = 6.0\text{ Vdc}$	I_{EBO}		100	μAdc
Collector-Emitter Cutoff Current $V_{CE} = 90\text{ Vdc}, V_{BE} = 1.5\text{ Vdc}$	I_{CEX}		10	μAdc
Collector-Base Cutoff Current $V_{CB} = 100\text{ Vdc}$	I_{CBO}		10	μAdc

2N6193 JAN SERIES

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
ON CHARACTERISTICS ⁽³⁾				
DC Current Gain I _C = 0.5 Adc, V _{CE} = 2.0 Vdc I _C = 2.0 Adc, V _{CE} = 2.0 Vdc I _C = 5.0 Adc, V _{CE} = 2.0 Vdc	h _{FE}	60 60 40	240	
Collector-Emitter Saturation Voltage I _C = 2.0 Adc, I _B = 0.2 Adc I _C = 5.0 Adc, I _B = 0.5 Adc	V _{CE(sat)}		0.7 1.2	Vdc
Base-Emitter Saturation Voltage I _C = 2.0 Adc, I _B = 0.2 Adc I _C = 5.0 Adc, I _B = 0.5 Adc	V _{BE(sat)}		1.2 1.8	Vdc

DYNAMIC CHARACTERISTICS

Magnitude of Common Emitter Small-Signal Short Circuit Forward-Current Transfer Ratio I _C = 0.5 Adc, V _{CE} = 10 Vdc, f = 10 MHz	h _{fe}	3.0	15	
Output Capacitance V _{CB} = 10 Vdc, I _E = 0, 100 kHz ≤ f ≤ 1.0 MHz	C _{obo}		300	pF
Output Capacitance V _{BE} = 2.0 Vdc, I _C = 0, 100 kHz ≤ f ≤ 1.0 MHz	C _{ibo}		1250	pF

SWITCHING CHARACTERISTICS

Delay Time	V _{CC} = -40 Vdc, V _{BE(off)} = 3.0 Vdc	t _d		100	ns
Rise Time	I _C = 2.0 Adc, I _{B1} = 0.2 Adc	t _r		100	ns
Storage Time	V _{CC} = -40 Vdc I _C = 2.0 Adc,	t _s		2.0	μs
Fall Time	I _{B1} = -I _{B2} = 0.2 Adc	t _f		200	ns

SAFE OPERATING AREA

DC Tests T _C = +25°C, 1 Cycle, t ≥ 0.5 s	
Test 1 V _{CE} = 2.0 Vdc, I _C = 5.0 Adc	
Test 2 V _{CE} = 90 Vdc, I _C = 55 mAdc	

(3) Pulse Test: Pulse Width = 300μs, Duty Cycle ≤ 2.0%.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.