



**INTERNATIONAL
SEMICONDUCTOR, INC.**

GERMANIUM GLASS DIODES

**1N34A
to
1N3773**

MAXIMUM RATINGS *

Operating Temperature: -55 °C to +70 °C
Storage Temperature: -55 °C to +100 °C

* ELECTRICAL CHARACTERISTICS @ 25 C, unless otherwise specified

JEDEC TYPE NUMBERS	PEAK INVERSE VOLTAGE	MAXIMUM FORWARD VOLTAGE			MAXIMUM REVERSE LEAKAGE		REVERSE RECOVERY TIME
		PIV	V _F	I _F	V _R	I _R	
		Volts	Volts	mA	Volts	µA	
1N34A	60	1.0	5	50	30	-	
1N55B	180	1.0	5	150	500	-	
1N60	50	1.0	5	20	40	-	
1N87	22.5	0.3	0.1	1.5	30	-	
1N98A	80	1.0	40	50	100	-	
1N100A	80	1.0	40	50	50	-	
1N270	100	1.0	200	50	100	-	
1N276	100	1.0	40	50	100	300	
1N277	125	1.0	100	50	250	-	
1N278	60	1.0	20	50	125 (1)	-	
1N527	10	0.3	1	10	50	-	
1N695	20	1.0	100	10	2	300	
1N695A	25	0.5	10	10	2	300	
1N949	50	0.38	10	6	10	-	
1N995	15	0.5	10	6	10	6	
1N996	25	1.0	40	15	15	300	
1N3466	40	0.5	200	30	15	-	
1N3467	15	0.8	20	10	15	2	
1N3489	35	1.0	600	20	15	-	
1N3666	80	1.0	200	20	10	300	
1N3773	25	0.5	15	3	4	40	

* JEDEC Registered Data.

(1) T_a = 75 °C

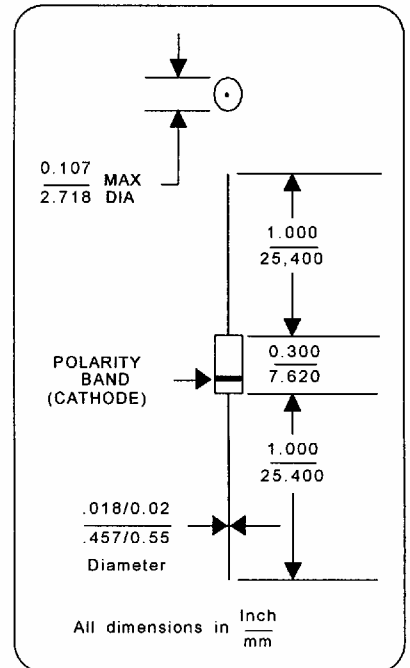


FIGURE 1

DESIGN DATA

CASE: Hermetically sealed glass case. DO-7 Outline.

LEAD MATERIAL: Copper Clad Steel

LEAD FINISH: TinPlate

THERMAL RESISTANCE:
250 °C/w (Typical)
junction to ambient.

POLARITY: Diode to be operated with the banded (cathode) end positive with respect to the opposite end

WEIGHT: 0.2 Grams

MOUNTING POSITION: Any

252 Cox Street, Roselle, NJ, USA, 07203-1704 ■ 908 245-2233

Toll-Free (800) 392-2474

Fax: (908) 245-5541

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.