


# BA782S, BA783S


## Bandswitching Diodes

### SOD-323

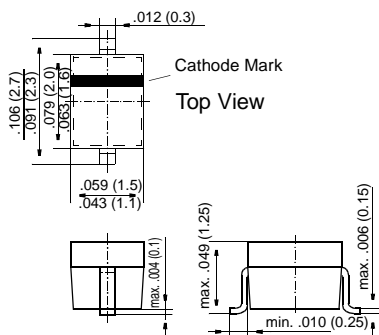

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Silicon Epitaxial Planar Diode Switches 
- ◆ For electronic bandswitching in radio and TV tuners in the frequency range of 50 ... 1000 MHz. The dynamic forward resistance is constant and very small over a wide range of frequency and forward current. The reverse capacitance is also small and largely independent of the reverse voltage.
- ◆ These diodes are also available in SOD-123 case with the type designations BA782 and BA783.

### MECHANICAL DATA

**Case:** SOD-323 Plastic Package  
**Weight:** approx. 0.004 g

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Value	Unit
Reverse Voltage	$V_R$	35	V
Forward Continuous Current at $T_{amb} = 25\text{ °C}$	$I_F$	100	mA
Junction Temperature	$T_j$	125	°C
Storage Temperature Range	$T_S$	-55 to +125	°C

# BA782S, BA783S


## ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified


	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage at $I_F = 100 \text{ mA}$	$V_F$	-	-	1	V
Leakage Current at $V_R = 20 \text{ V}$	$I_R$	-	-	50	nA
Dynamic Forward Resistance at $f = 50 \text{ to } 1000 \text{ MHz}$ , $I_F = 3 \text{ mA}$ at $f = 50 \text{ to } 1000 \text{ MHz}$ , $I_F = 10 \text{ mA}$	<b>BA782S</b> $r_f$	-	-	0.7	$\Omega$
	<b>BA783S</b> $r_f$	-	-	1.2	$\Omega$
	<b>BA782S</b> $r_f$	-	-	0.5	$\Omega$
	<b>BA783S</b> $r_f$	-	-	0.9	$\Omega$
Capacitance at $V_R = 1 \text{ V}$ , $f = 1 \text{ MHz}$ at $V_R = 3 \text{ V}$ , $f = 1 \text{ MHz}$	<b>BA782S</b> $C_{tot}$	-	-	1.5	pF
	<b>BA783S</b> $C_{tot}$	-	-	1.25	pF
	<b>BA783S</b> $C_{tot}$	-	-	1.2	pF
Series Inductance across Case	$L_S$	-	2.5	-	nH

## RATINGS AND CHARACTERISTIC CURVES BA782S, BA783S

Capacitance  
versus reverse voltage

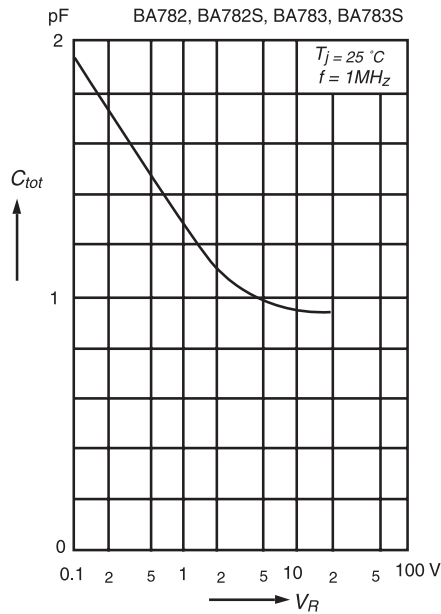

Dynamic forward resistance  
versus forward voltage

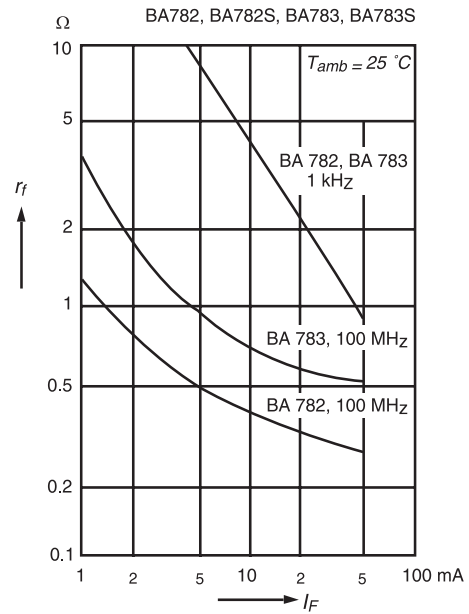



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.