

HIGH-PERFORMANCE PWM CONTROLLERS


KA7577 is fixed frequency PWM controller and specially designed for SMPS to get regulated DC voltage from AC power supply. This integrated circuit has so fast rise and fall output pulse that it can directly drive power transistor as well as power MOSFET.

This device features high speed and high sensitive current limiting.

Protection circuitry include current limiting function against short and over current at secondary side, owing to the integrated timer-type-protection circuit.

FEATURES


- Low Stand-By Current
- Pulse by Pulse Current Limiting
- Over Voltage Protection
- Over Current Protection
- Integrated Thermal Shutdown Circuit
- Output Driver Current of $\pm 2A$
- Totempole Output

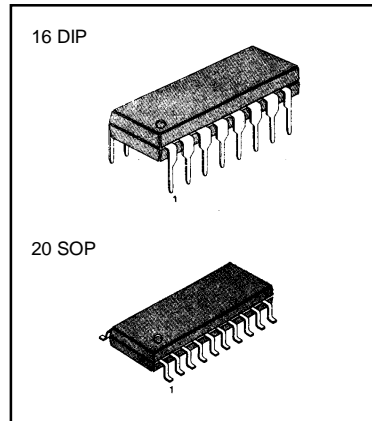

ORDERING INFORMATION

Device	Package	Operating Temperature
KA7577	16 DIP	- 30 ~ +85°C
KA7577D	20 SOP	- 30 ~ +85°C

BLOCK DIAGRAM

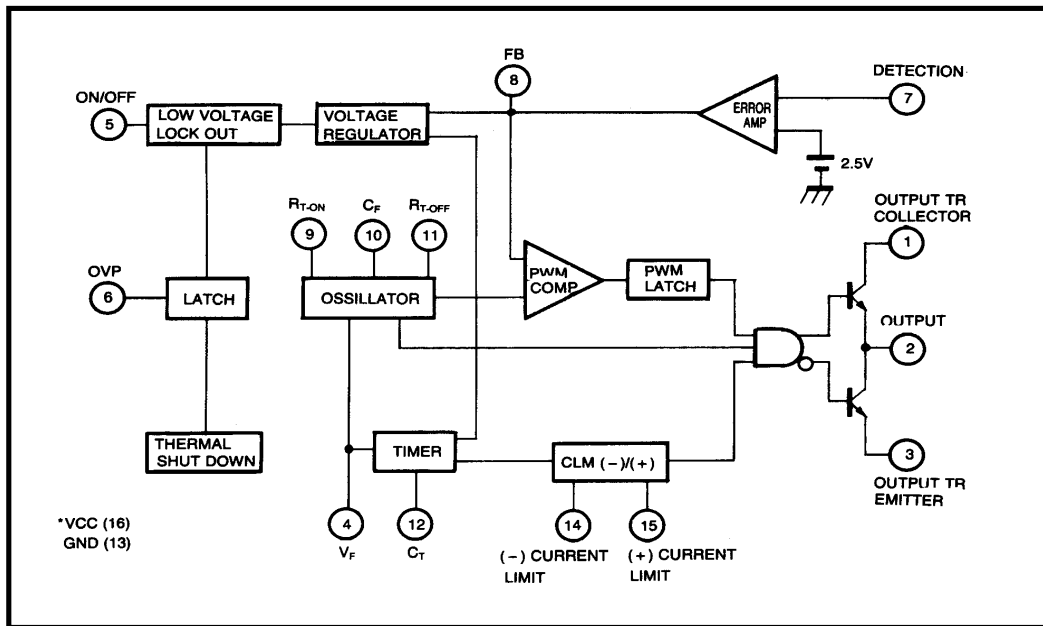

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CC}	31	V
Collector Supply Voltage	V_C	31	V
Output DC Current	$I_{O(DC)}$	± 0.5	A
Output Peak Voltage	I_{OPK}	± 2	A
V_F Terminal Voltage	$V_{(VF)}$	31	V
$V_{ON/OFF}$ Terminal Voltage	$V_{(ON/OFF)}$	31	V
Current Limiting (-) Terminal Voltage	$V_{(CLM-)}$	- 4 ~+4	V
Current Limiting (+) Terminal Voltage	$V_{(CLM+)}$	- 0.3 ~+4	V
Over Voltage Protection Terminal Voltage	$V_{(OVP)}$	31	V
Detection Terminal Voltage (Note 1)	$V_{(DET)}$	6	V
Detection Terminal Sink Current (Note 1)	$I_{SINK(DET)}$	5	mA
Feedback Terminal Voltage	$V_{(FB)}$	0 - 10	V
Timer ON Terminal Source Current	$I_{SOURCE(T-ON)}$	-1	mA
Timer OFF Terminal Source Current	$I_{SOURCE(T-OFF)}$	-1	mA
Power Dissipation	P_D	1.5	W
Thermal Derating Factor	K_{TD}	12	mW/°C
Operating Temperature Range	T_{OPR}	- 30 ~ +85	°C
Storage Temperature Range	T_{STG}	- 40 ~ +125	°C
Junction Temperature	T_J	150	°C

(Note 1)

This terminal has the constant voltage characteristics of 6-8V, when current is supplied from out side. The maximum allowable voltage is 6V when the constant voltage is applied to this terminal. And maximum allowable current is 5mA, it is recommended to use current limiting resistor.

ELECTRICAL CHARACTERISTICS(V_{CC} = 18V, T_A = 25 °C, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
POWER SUPPLY VOLTAGE AND CURRENT SECTION						
Power Supply Voltage	V _{CC}		-	-	30	V
Operation Start-Up Voltage	V _{CC(START)}		15.2	16.2	17.2	V
Operation Stop Voltage	V _{CC(STOP)}		9.0	9.9	10.9	V
Difference Voltage Between Operation Start and Stop	Δ V _{CC}		5.0	6.3	7.6	V
Stand-By Current	I _{SB}	T _A = 25 °C, V _{CC} = 14.5V	50	80	140	μA
		T _A = -30 to +85 °C, V _{CC} = 14.5V	40	80	160	μA
Operating Supply Current	I _{CC(OPR)}	V _{CC} = 30V	13	15	21	mA
Supply Current at Non-Operating	I _{CC(OFF)}	V _{CC} = 25V	0.95	1.31	1.9	mA
		V _{CC} = 14V	50	80	120	μA
Supply Current at Timer Non-Operating	I _{CC(CT)}	V _{CC} = 25V	0.95	1.35	2.0	mA
		V _{CC} = 14V	-	140	220	μA
Supply Current at OVP Operating	I _{CC(OVP)}	V _{CC} = 25V	1.0	2.0	3.0	mA
		V _{CC} = 9.5V	125	190	290	μA
ON/OFF SECTION						
ON/OFF Terminal High Threshold Voltage	V _{THH(ON/OFF)}		2.1	2.6	3.1	V
ON/OFF Terminal Low Threshold Voltage	V _{THL(ON/OFF)}		1.9	2.4	2.9	V
ON/OFF Terminal Hysterisis Voltage	V _{HYS(ON/OFF)}		0.1	0.2	0.3	V

ELECTRICAL CHARACTERISTICS(V_{CC} = 18V, T_A = 25 °C, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
DETECTION SECTION						
Detection Voltage	V _(DET)		2.4	2.5	2.6	V
Input Current of Detection Voltage	I _{I(DET)}	V _(DET) = 2.5V	-	1.0	3.0	μ A
Voltage Gain of Detection Amp	G _{V(DET)}		40	55	-	dB
FEEDBACK SECTION						
Current at O Duty Cycle	I _{FB(MIN D)}		- 2.1	-1.54	-1.0	mA
Current at Max Duty Cycle	I _{FB(MAX D)}		- 0.9	- 0.55	- 0.4	mA
Current Difference Between Max and O Duty Cycle	Δ I _(FB)		-1.35	- 0.99	- 0.7	mA
FB Terminal Voltage	V _(FB)	I _{SINK} = - 0.95mA	4.9	5.9	7.1	V
FB Terminal Resistance	R _(FB)	V _(DET) = 2.5V	-	500	-	ohm
OVER VOLTAGE PROTECTION SECTION						
OVP Terminal Threshold Voltage	V _{TH(OVP)}		1.0	1.4	1.8	V
OVP Terminal Input Current	I _{I(OVP)}		-	1.2	3.6	μ A
OVP Cancellation Voltage	V _{CC(OVPC)}		7.6	8.6	-	V
Difference Voltage Between Operating Stop and OVP Cancellation	Δ V _{CC(OVP)}		0.65	1.3	-	V
TIMER SECTION						
Timer Frequency	f _(TIMER)		0.27	0.4	0.6	Hz
Timer Charge Current	I _{CHG(TIMER)}	T _A = -5 °C	-193	-138	-102	μ A
		T _A = 25 °C	-178	-127	-94	μ A
		T _A = 85 °C	-147	-105	-78	μ A
Off Time/On Time Ratio	K		7.0	8.7	11.0	

ELECTRICAL CHARACTERISTICS(V_{CC}=18V, T_A=25°C, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
CURRENT LIMITING SECTION						
CLM(-) Terminal Threshold Voltage	V _{TH(CLM-)}	T _A = - 5 to + 85°C	-220	-200	-180	mV
CLM(-) Terminal Source Current	I _{SOURCE(CLM-)}	V _(CLM-)	-170	-125	-90	μ A
CLM(-) Terminal Duty Time	t _{D(CLM-)}			170		nS
CLM(+) Terminal Threshold Voltage	V _{TH(CLM+)}	T _A = - 5 to + 85°C	180	200	220	mV
CLM(+) Terminal Source Current	I _{SOURCE(CLM+)}	V _(CLM+) = 0V	-270	-205	-140	μ A
CLM(+) Terminal Duty Time	t _{D(CLM+)}				130	nS
OSCILLATOR SECTION						
Operation Frequency	f	R _{T-ON} = 17K R _{T-OFF} = 20K C _F = 220pF T _A = - 5 to + 85°C	170	188	208	KHz
Maximum On Duty	D _{ON(MAX)}	T _A = - 5 to + 85°C	47	50	53	%
Upper Limit Voltage of Oscillation Waveform	V _{L(OSC)}		3.97	4.37	4.77	V
Lower Limit Voltage of Oscillation Waveform	V _{L(OSC)}		1.76	1.96	2.16	V
Voltage Difference Between Upper Limit and Lower Limit	Δ V _(OSC)		2.11	2.41	2.71	V
V_F SECTION						
OSC. Frequency at CLM Operating	f _{VF}	V _{VF} = 5V, R _{T-ON} = 17K R _{T-OFF} = 20K C _F = 220pF	170	188	207	KHz
		V _F = 2V, R _{T-ON} = 17V R _{T-OFF} = 20K C _F = 220pF	108	124	143	KHz

ELECTRICAL CHARACTERISTICS(V_{CC}=18V, T_A = 25°C , unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
V_F SECTION						
Duty Ratio of CLM Operating	K	V _F = 0.2V Max On Duty/ Min Off Duty	11	13.7	22	
V _F Voltage at Timer Operating Start	V _(VF)		2.7	3.0	3.3	V
V _F Terminal Input Current	I _(VF)		-	2	6	μ A
OUTPUT SECTION						
Low Output Voltage	V _{OL1}	V _{CC} = 18V, I _O = 10mA	-	0.05	0.4	V
	V _{OL 2}	V _{CC} = 18V, I _O = 100mA	-	0.7	1.4	V
	V _{OL3}	V _{CC} = 5V, I _O = 1mA	-	0.69	1.0	V
	V _{OL4}	V _{CC} = 5V, I _O = 100mA	-	1.3	2.0	V
High Output Voltage	V _{OH1}	V _{CC} = 18V, I _O = -10mA	16.0	16.5	-	V
	V _{OH2}	V _{CC} = 18V, I _O = -100mA	15.5	16.0	-	V
Rise Time	T _R	No load		50	-	nS
Fall Time	T _F	No load		35	-	nS
THERMAL PROTECTION SECTION						
Thermal protection Operating Temperature	T _(TP)		120	140	160	°C

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	ISOPLANAR™	UHC™
CoolFET™	MICROWIRE™	VCX™
CROSSVOLT™	POP™	
E ² CMOS™	PowerTrench™	
FACT™	QST™	
FACT Quiet Series™	Quiet Series™	
FAST®	SuperSOT™-3	
FASTr™	SuperSOT™-6	
GTO™	SuperSOT™-8	
HiSeC™	TinyLogic™	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.