

# SOT23 NPN SILICON PLANAR MEDIUM POWER DARLINGTON TRANSISTORS


**FMMT38A**  
**FMMT38B**  
**FMMT38C**

**ISSUE 3 – AUGUST 1996**

## FEATURES

- \* 60 Volt  $V_{CEO}$
- \* Gain of 10K at  $I_C=0.5$  Amp

PARTMARKING DETAILS – FMMT38A – 4J  
 FMMT38B – 5J  
 FMMT38C – 7J



## ABSOLUTE MAXIMUM RATINGS.


PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	$V_{CBO}$	80	V
Collector-Emitter Voltage	$V_{CEO}$	60	V
Emitter-Base Voltage	$V_{EBO}$	10	V
Peak Pulse Current	$I_{CM}$	800	mA
Continuous Collector Current	$I_C$	300	mA
Power Dissipation at $T_{amb}=25^\circ\text{C}$	$P_{tot}$	330	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^\circ\text{C}$

## ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$ ).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	80		V	$I_C=10\mu\text{A}$ , $I_E=0$
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	60		V	$I_C=10\text{mA}$ , $I_B=0$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	10		V	$I_E=10\mu\text{A}$ , $I_C=0$
Collector Cut-Off Current	$I_{CBO}$		100	nA	$V_{CB}=60\text{V}$ , $I_E=0$
Emitter Cut-Off Current	$I_{EBO}$		100	nA	$V_{EB}=8\text{V}$ , $I_C=0$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		1.25	V	$I_C=800\text{mA}$ , $I_B=8\text{mA}^*$
Base-Emitter Turn-on Voltage	$V_{BE(on)}$		1.8	V	$I_C=800\text{mA}$ , $V_{CE}=5\text{V}^*$
Static Forward Current Transfer Ratio	FMMT38A	$h_{FE}$	500 1000		$I_C=100\text{mA}$ , $V_{CE}=5\text{V}^*$ $I_C=500\text{mA}$ , $V_{CE}=5\text{V}^*$
	FMMT38B		2000 4000		$I_C=100\text{mA}$ , $V_{CE}=5\text{V}^*$ $I_C=500\text{mA}$ , $V_{CE}=5\text{V}^*$
	FMMT38C		5000 10000		$I_C=100\text{mA}$ , $V_{CE}=5\text{V}^*$ $I_C=500\text{mA}$ , $V_{CE}=5\text{V}^*$

\*Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$   
 Spice parameter data is available upon request for this device

**TYPICAL CHARACTERISTICS**

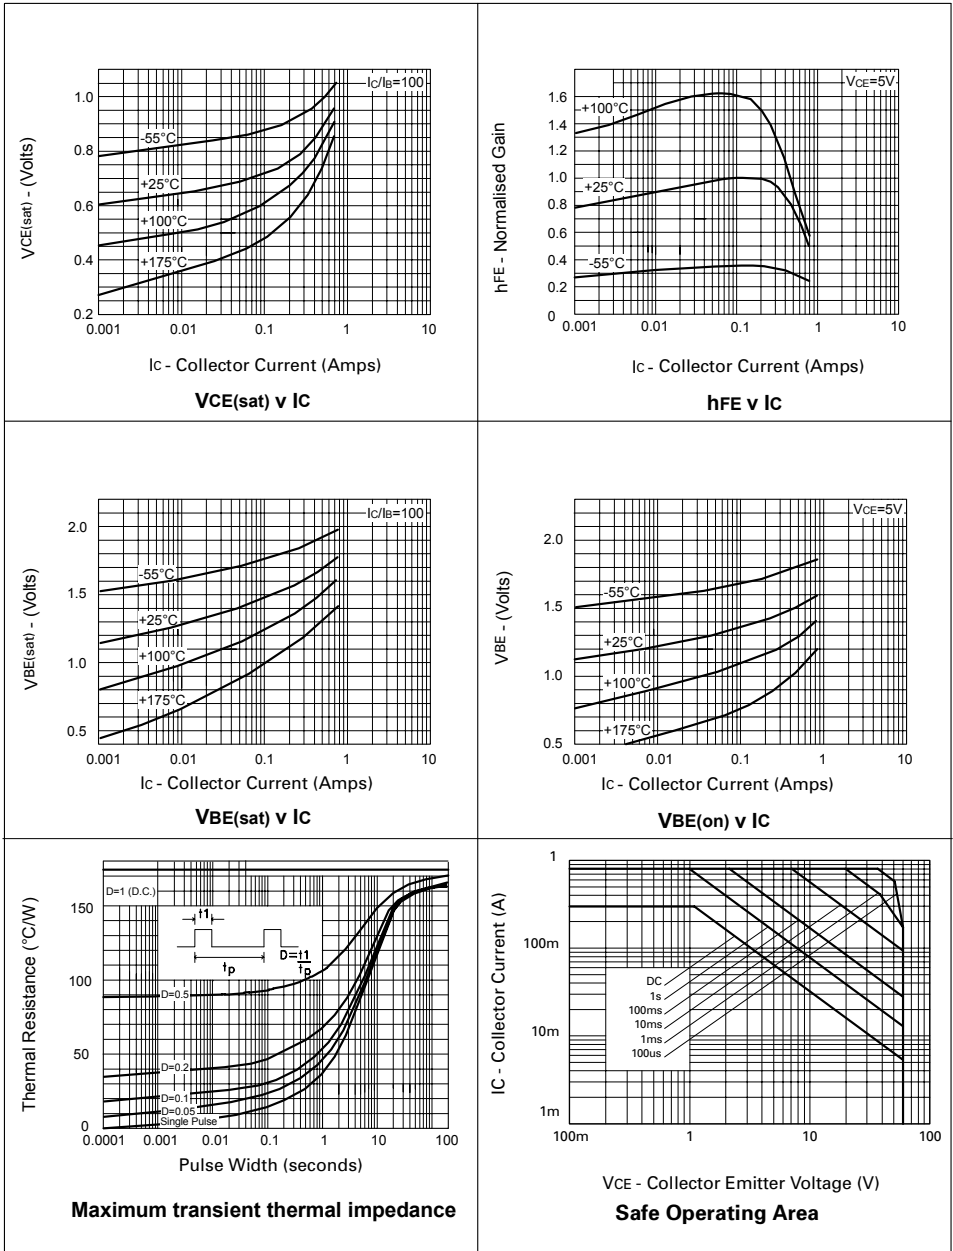



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.