

L78M00 Series



3028

Monolithic Linear IC

5 to 24V 0.5A 3-Pin Voltage Regulator

©929C

Use

- General-purpose voltage regulator

Features

- Output voltage

L78M05: 5V	L78M06: 6V	L78M07: 7V	L78M08: 8V
L78M09: 9V	L78M10: 10V	L78M12: 12V	L78M15: 15V
L78M18: 18V	L78M20: 20V	L78M24: 24V	
- Available output: 500mA
- On-chip thermal protector
- On-chip overcurrent limiter
- On-chip ASO protector
- JEDEC TO-220AB package facilitating easy mounting and thermal design as in case of transistor

[Common to L78M00 series]

Maximum Ratings at Ta=25°C

				unit
Maximum Supply Voltage	V _{CC} max	Pin 1	35	V
Allowable Power Dissipation	Pd max		1.75	W
Operating Temperature	Topg		-20 to +80	°C
Storage Temperature	Tstg		-40 to +150	°C

[L78M05]


Recommended Operating Conditions at Ta=25°C

			unit
Input Voltage	V _{IN}	7.5 to 20	V
Output Current	I _{OUT}	5 to 500	mA


Operating Characteristics at Ta=25°C, V_{IN}=10V, I_{OUT}=350mA, See specified

		Test Circuit.				
		min	typ	max	unit	
Output Voltage	V _{OUT}	4.8	5.0	5.2	V	
Line Regulation	ΔV _{oline}	Tj=25°C, 7V ≤ V _{IN} ≤ 25V, I _{OUT} =200mA			3.0	mV
		Tj=25°C, 8V ≤ V _{IN} ≤ 20V, I _{OUT} =200mA			1.0	25
Load Regulation	ΔV _{oload}	Tj=25°C, 5mA ≤ I _{OUT} ≤ 500mA			100	mV
		Tj=25°C, 5mA ≤ I _{OUT} ≤ 200mA			50	mV

Continued on next page.

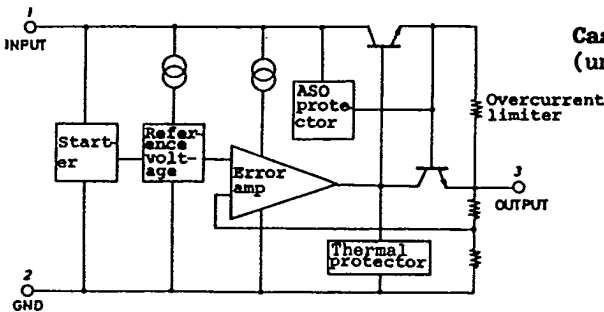

Case Outline 3028-S3TR
(unit:mm)

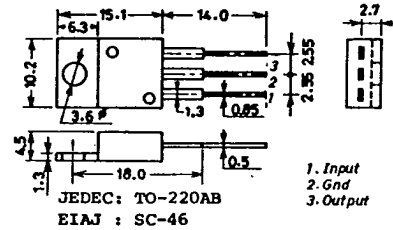

7307KI/8055MW/8031KI, TS No.929-1/8

L78M05,06,07,08,09,10,12,15,18,20,24

T-58-11-13

Continued from preceding page.

			min	typ	max	unit
Output Voltage	V_{OUT}	$7V \leq V_{IN} \leq 20V,$ $5mA \leq I_{OUT} \leq 350mA$	4.75		5.25	V
Current Dissipation	I_{CC}	$T_j = 25^\circ C$		4.5	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$8V \leq V_{IN} \leq 25V,$ $I_{OUT} = 200mA$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		40		μV
Ripple Rejection	R_{rej}	$f = 120Hz$ $8V \leq V_{IN} \leq 19V$ $T_j = 25^\circ C$	62			dB
		$I_{OUT} = 100mA$ $I_{OUT} = 300mA$	62	80		dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT} = 350mA$		2.0		V
Short Current	I_{OS}	$T_j = 25^\circ C, V_{IN} = 35V, \text{ to GND}$		300		mA
Peak Output Current	I_{op}	$T_j = 25^\circ C$		0.7		A

[L78M06]

Recommended Operating Conditions at $T_a = 25^\circ C$

				unit
Input Voltage	V_{IN}		8.5 to 21	V
Output Current	I_{OUT}		5 to 500	mA

Operating Characteristics at $T_a = 25^\circ C, V_{IN} = 11V, I_{OUT} = 350mA$, See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j = 25^\circ C$	5.75	6.0	6.25	V
Line Regulation	ΔV_{oline}	$T_j = 25^\circ C, 8V \leq V_{IN} \leq 25V,$ $I_{OUT} = 200mA$		5.0	60	mV
		$T_j = 25^\circ C, 9V \leq V_{IN} \leq 20V,$ $I_{OUT} = 200mA$		1.5	30	mV
Load Regulation	ΔV_{oload}	$T_j = 25^\circ C, 5mA \leq I_{OUT} \leq 500mA$ $T_j = 25^\circ C, 5mA \leq I_{OUT} \leq 200mA$			120	mV
					60	mV
Output Voltage	V_{OUT}	$8V \leq V_{IN} \leq 21V,$ $5mA \leq I_{OUT} \leq 350mA$		5.7	6.3	V
Current Dissipation	I_{CC}	$T_j = 25^\circ C$		4.5	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$9V \leq V_{IN} \leq 25V,$ $I_{OUT} = 200mA$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		45		μV
Ripple Rejection	R_{rej}	$f = 120Hz$ $9V \leq V_{IN} \leq 20V$ $T_j = 25^\circ C$	59			dB
		$I_{OUT} = 100mA$ $I_{OUT} = 300mA$	59	80		dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT} = 350mA$		2.0		V
Short Current	I_{OS}	$T_j = 25^\circ C, V_{IN} = 35V, \text{ to GND}$		300		mA
Peak Output Current	I_{op}	$T_j = 25^\circ C$		0.7		A

[L78M07]

Recommended Operating Conditions at $T_a = 25^\circ C$

				unit
Input Voltage	V_{IN}		9.5 to 22	V
Output Current	I_{OUT}		5 to 500	mA

L78M05,06,07,08,09,10,12,15,18,20,24

T-58-11-13

Operating Characteristics at Ta=25°C, V_{IN}=12V, I_{OUT}=350mA, See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V _{OUT}	T _J =25°C	6.72	7.0	7.28	V
Line Regulation	ΔV _{oline}	T _J =25°C, 9V ≤ V _{IN} ≤ 25V, I _{OUT} =200mA		6.0	60	mV
		T _J =25°C, 10V ≤ V _{IN} ≤ 20V, I _{OUT} =200mA		2.0	30	mV
Load Regulation	ΔV _{oload}	T _J =25°C, 5mA ≤ I _{OUT} ≤ 500mA			140	mV
		T _J =25°C, 5mA ≤ I _{OUT} ≤ 200mA			70	mV
Output Voltage	V _{OUT}	9V ≤ V _{IN} ≤ 22V, 5mA ≤ I _{OUT} ≤ 350mA	6.6		7.4	V
Current Dissipation	I _{CC}	T _J =25°C	4.6	6.0		mA
Current Dissipation Variation (Line)	ΔI _{CCline}	10V ≤ V _{IN} ≤ 25V, I _{OUT} =200mA			0.8	mA
Current Dissipation Variation (Load)	ΔI _{CCload}	5mA ≤ I _{OUT} ≤ 350mA			0.5	mA
Output Noise Voltage	V _{NO}	10Hz ≤ f ≤ 100kHz		48		μV
Ripple Rejection	R _{rej}	f=120Hz I _{OUT} =100mA	58			dB
		10V ≤ V _{IN} ≤ 21V I _{OUT} =300mA	58	80		dB
		T _J =25°C				
Minimum Input-Output Voltage Drop	V _{drop}	I _{OUT} =350mA	2.0			V
Short Current	I _{OS}	T _J =25°C, V _{IN} =35V, to GND	300			mA
Peak Output Current	I _{op}	T _J =25°C	0.7			A

[L78M08]

Recommended Operating Conditions at Ta=25°C

			unit
Input Voltage	V _{IN}	10.5 to 23	V
Output Current	I _{OUT}	5 to 500	mA

Operating Characteristics at Ta=25°C, V_{IN}=15V, I_{OUT}=350mA, See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V _{OUT}	T _J =25°C	7.7	8.0	8.3	V
Line Regulation	ΔV _{oline}	T _J =25°C, 10.5V ≤ V _{IN} ≤ 25V, I _{OUT} =200mA		6.0	60	mV
		T _J =25°C, 11V ≤ V _{IN} ≤ 20V, I _{OUT} =200mA		2.0	30	mV
Load Regulation	ΔV _{oload}	T _J =25°C, 5mA ≤ I _{OUT} ≤ 500mA			160	mV
		T _J =25°C, 5mA ≤ I _{OUT} ≤ 200mA			80	mV
Output Voltage	V _{OUT}	10.5V ≤ V _{IN} ≤ 23V, 5mA ≤ I _{OUT} ≤ 350mA	7.6		8.4	V
Current Dissipation	I _{CC}	T _J =25°C	4.6	6.0		mA
Current Dissipation Variation (Line)	ΔI _{CCline}	11V ≤ V _{IN} ≤ 25V, I _{OUT} =200mA			0.8	mA
Current Dissipation Variation (Load)	ΔI _{CCload}	5mA ≤ I _{OUT} ≤ 350mA			0.5	mA
Output Noise Voltage	V _{NO}	10Hz ≤ f ≤ 100kHz		50		μV
Ripple Rejection	R _{rej}	f=120Hz I _{OUT} =100mA	56			dB
		11.5V ≤ V _{IN} ≤ 22V I _{OUT} =300mA	56	80		dB
		T _J =25°C				
Minimum Input-Output Voltage Drop	V _{drop}	I _{OUT} =350mA	2.0			V
Short Current	I _{OS}	T _J =25°C, V _{IN} =35V, to GND	300			mA
Peak Output Current	I _{op}	T _J =25°C	0.7			A

L78M05,06,07,08,09,10,12,15,18,20,24

T-58-11-13

[L78M09]**Recommended Operating Conditions at Ta=25°C**

			unit
Input Voltage	V_{IN}	12 to 25	V
Output Current	I_{OUT}	5 to 500	mA

Operating Characteristics at Ta=25°C, $V_{IN}=16V$, $I_{OUT}=350mA$, See specified

		Test Circuit.	min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ C$	8.6	9.0	9.4	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ C, 11.5V \leq V_{IN} \leq 25V,$ $I_{OUT}=200mA$	6.0	100		mV
		$T_j=25^\circ C, 12V \leq V_{IN} \leq 20V,$ $I_{OUT}=200mA$	2.0	50		mV
Load Regulation	ΔV_{oload}	$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 500mA$			180	mV
		$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 200mA$			90	mV
Output Voltage	V_{OUT}	$11.5V \leq V_{IN} \leq 24V,$ $5mA \leq I_{OUT} \leq 350mA$	8.5		9.5	V
Current Dissipation	I_{CC}	$T_j=25^\circ C$	4.6		6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$12.5V \leq V_{IN} \leq 25V,$ $I_{OUT}=200mA$			0.8	mA
		$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$10Hz \leq f \leq 100kHz$			60	μV
		$f=120Hz$			56	dB
Output Noise Voltage Ripple Rejection	R_{rej}	$12V \leq V_{IN} \leq 23V$ $T_j=25^\circ C$	$I_{OUT}=100mA$	56	80	dB
			$I_{OUT}=300mA$	56	80	dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350mA$	2.0			V
Short Current	I_{OS}	$T_j=25^\circ C, V_{IN}=35V, \text{ to GND}$	300			mA
Peak Output Current	I_{op}	$T_j=25^\circ C$	0.7			A

[L78M10]**Recommended Operating Conditions at Ta=25°C**

			unit
Input Voltage	V_{IN}	13 to 25	V
Output Current	I_{OUT}	5 to 500	mA

Operating Characteristics at Ta=25°C, $V_{IN}=17V$, $I_{OUT}=350mA$, See specified

		Test Circuit.	min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ C$	9.6	10.0	10.4	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ C, 12.5V \leq V_{IN} \leq 25V,$ $I_{OUT}=200mA$	7.0	100		mV
		$T_j=25^\circ C, 13V \leq V_{IN} \leq 22V,$ $I_{OUT}=200mA$	2.0	50		mV
Load Regulation	ΔV_{oload}	$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 500mA$			200	mV
		$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 200mA$			100	mV
Output Voltage	V_{OUT}	$12.5V \leq V_{IN} \leq 25V,$ $5mA \leq I_{OUT} \leq 350mA$	9.5		10.5	V
Current Dissipation	I_{CC}	$T_j=25^\circ C$	4.6		6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$13.5V \leq V_{IN} \leq 25V,$ $I_{OUT}=200mA$			0.8	mA
		$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$10Hz \leq f \leq 100kHz$			65	μV
		$f=120Hz$			55	dB
Output Noise Voltage Ripple Rejection	R_{rej}	$13V \leq V_{IN} \leq 25V$ $T_j=25^\circ C$	$I_{OUT}=100mA$	55	80	dB
			$I_{OUT}=300mA$	55	80	dB

Continued on next page.

T-58-11-13

L78M05,06,07,08,09,10,12,15,18,20,24

Continued from preceding page.

			min	typ	max	unit
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350mA$		2.0		V
Short Current	I_{OS}	$T_j=25^{\circ}C, V_{IN}=35V, \text{ to GND}$		300		mA
Peak Output Current	I_{op}	$T_j=25^{\circ}C$		0.7		A

[L78M12]

Recommended Operating Conditions at $T_a=25^{\circ}C$

				unit
Input Voltage	V_{IN}		15 to 25	V
Output Current	I_{OUT}		5 to 500	mA

Operating Characteristics at $T_a=25^{\circ}C, V_{IN}=19V, I_{OUT}=350mA$, See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^{\circ}C$	11.5	12.0	12.5	V
Line Regulation	ΔV_{oline}	$T_j=25^{\circ}C, 14.5V \leq V_{IN} \leq 30V, I_{OUT}=200mA$	8.0	100		mV
		$T_j=25^{\circ}C, 16V \leq V_{IN} \leq 25V, I_{OUT}=200mA$	2.0	50		mV
Load Regulation	ΔV_{oload}	$T_j=25^{\circ}C, 5mA \leq I_{OUT} \leq 500mA$			240	mV
		$T_j=25^{\circ}C, 5mA \leq I_{OUT} \leq 200mA$			120	mV
Output Voltage	V_{OUT}	$14.5V \leq V_{IN} \leq 27V, 5mA \leq I_{OUT} \leq 350mA$	11.4		12.6	V
Current Dissipation	I_{CC}	$T_j=25^{\circ}C$	4.8	6.0		mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$15V \leq V_{IN} \leq 30V, I_{OUT}=200mA$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		75		μV
Ripple Rejection	R_{rej}	$f=120Hz$		55		dB
		$15V \leq V_{IN} \leq 25V, I_{OUT}=100mA$		55	80	dB
		$T_j=25^{\circ}C, I_{OUT}=300mA$				
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350mA$		2.0		V
Short Current	I_{OS}	$T_j=25^{\circ}C, V_{IN}=35V, \text{ to GND}$		300		mA
Peak Output Current	I_{op}	$T_j=25^{\circ}C$		0.7		A

[L78M15]

Recommended Operating Conditions at $T_a=25^{\circ}C$

				unit
Input Voltage	V_{IN}		18 to 30	V
Output Current	I_{OUT}		5 to 500	mA

Operating Characteristics at $T_a=25^{\circ}C, V_{IN}=23V, I_{OUT}=350mA$, See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^{\circ}C$	14.4	15.0	15.6	V
Line Regulation	ΔV_{oline}	$T_j=25^{\circ}C, 17.5V \leq V_{IN} \leq 30V, I_{OUT}=200mA$	10.0	100		mV
		$T_j=25^{\circ}C, 19V \leq V_{IN} \leq 30V, I_{OUT}=200mA$	3.0	50		mV
Load Regulation	ΔV_{oload}	$T_j=25^{\circ}C, 5mA \leq I_{OUT} \leq 500mA$			300	mV
		$T_j=25^{\circ}C, 5mA \leq I_{OUT} \leq 200mA$			150	mV
Output Voltage	V_{OUT}	$17.5V \leq V_{IN} \leq 30V, 5mA \leq I_{OUT} \leq 350mA$	14.25		15.75	V
Current Dissipation	I_{CC}	$T_j=25^{\circ}C$	4.8	6.0		mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$17.5V \leq V_{IN} \leq 30V, I_{OUT}=200mA$			0.8	mA

Continued on next page.

L78M05,06,07,08,09,10,12,15,18,20,24

T-58-11-13

Continued from preceding page.

			min	typ	max	unit
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		90		μV
Ripple Rejection	R_{rej}	$f=120Hz$ $18.5V \leq V_{IN} \leq 28.5V$ $T_j=25^\circ C$	$I_{OUT}=100mA$ $I_{OUT}=300mA$	54 70		dB dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350mA$		2.0		V
Short Current	I_{OS}	$T_j=25^\circ C, V_{IN}=35V, \text{ to GND}$		300		mA
Peak Output Current	I_{op}	$T_j=25^\circ C$		0.7		A

[L78M18]Recommended Operating Conditions at $T_a=25^\circ C$

			unit
Input Voltage	V_{IN}	21 to 33	V
Output Current	I_{OUT}	5 to 500	mA

Operating Characteristics at $T_a=25^\circ C, V_{IN}=27V, I_{OUT}=350mA$, See specified

		Test Circuit.	min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ C$	17.3	18.0	18.7	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ C, 21V \leq V_{IN} \leq 35V,$ $I_{OUT}=200mA$	10.0	100		mV
Load Regulation	ΔV_{oload}	$T_j=25^\circ C, 22V \leq V_{IN} \leq 35V,$ $I_{OUT}=200mA$	5.0	50		mV
Output Voltage	V_{OUT}	$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 500mA$ $T_j=25^\circ C, 5mA \leq I_{OUT} \leq 200mA$			360 180	mV mV
Current Dissipation	I_{CC}	$21V \leq V_{IN} \leq 33V,$ $5mA \leq I_{OUT} \leq 350mA$ $T_j=25^\circ C$	17.1		18.9	V
Current Dissipation Variation (Line)	ΔI_{CCline}	$21V \leq V_{IN} \leq 33V,$ $I_{OUT}=200mA$		4.9	6.0	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 350mA$			0.8	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		100		μV
Ripple Rejection	R_{rej}	$f=120Hz$ $22V \leq V_{IN} \leq 33V,$ $T_j=25^\circ C$	$I_{OUT}=100mA$ $I_{OUT}=300mA$	53 70		dB dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350mA$		2.0		V
Short Current	I_{OS}	$T_j=25^\circ C, V_{IN}=35V, \text{ to GND}$		300		mA
Peak Output Current	I_{op}	$T_j=25^\circ C$		0.7		A

[L78M20]Recommended Operating Conditions at $T_a=25^\circ C$

			unit
Input Voltage	V_{IN}	23 to 35	V
Output Current	I_{OUT}	5 to 500	mA

Operating Characteristics at $T_a=25^\circ C, V_{IN}=29V, I_{OUT}=350mA$, See specified

		Test Circuit.	min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ C$	19.2	20.0	20.8	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ C, 23V \leq V_{IN} \leq 35V,$ $I_{OUT}=200mA$	10.0	100		mV
		$T_j=25^\circ C, 24V \leq V_{IN} \leq 35V,$ $I_{OUT}=200mA$	5.0	50		mV

Continued on next page.

L78M05,06,07,08,09,10,12,15,18,20,24

T-58-11-13

Continued from preceding page.

			min	typ	max	unit
Load Regulation	ΔV_{load}	$T_j=25^\circ\text{C}, 5\text{mA} \leq I_{\text{OUT}} \leq 500\text{mA}$			400	mV
		$T_j=25^\circ\text{C}, 5\text{mA} \leq I_{\text{OUT}} \leq 200\text{mA}$			200	mV
Output Voltage	V_{OUT}	$23\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$	19.0		21.0	V
Current Dissipation	I_{CC}	$T_j=25^\circ\text{C}$		4.9	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$23\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $I_{\text{OUT}}=200\text{mA}$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$			110	μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$ $24\text{V} \leq V_{\text{IN}} \leq 34\text{V},$ $T_j=25^\circ\text{C}$			53	dB
		$I_{\text{OUT}}=100\text{mA}$			70	dB
		$I_{\text{OUT}}=300\text{mA}$				
Minimum Input-Output Voltage Drop	V_{drop}	$I_{\text{OUT}}=350\text{mA}$			2.0	V
Short Current	I_{OS}	$T_j=25^\circ\text{C}, V_{\text{IN}}=35\text{V}, \text{ to GND}$			300	mA
Peak Output Current	I_{op}	$T_j=25^\circ\text{C}$			0.7	A

[L78M24]

Recommended Operating Conditions at $T_a=25^\circ\text{C}$

				unit
Input Voltage	V_{IN}		27 to 35	V
Output Current	I_{OUT}		5 to 500	mA

Operating Characteristics at $T_a=25^\circ\text{C}, V_{\text{IN}}=33\text{V}, I_{\text{OUT}}=350\text{mA}$, See specified

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ\text{C}$	23.0	24.0	25.0	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ\text{C}, 27\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $I_{\text{OUT}}=200\text{mA}$		10.0	100	mV
		$T_j=25^\circ\text{C}, 28\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $I_{\text{OUT}}=200\text{mA}$		5.0	50	mV
Load Regulation	ΔV_{load}	$T_j=25^\circ\text{C}, 5\text{mA} \leq I_{\text{OUT}} \leq 500\text{mA}$			480	mV
		$T_j=25^\circ\text{C}, 5\text{mA} \leq I_{\text{OUT}} \leq 200\text{mA}$			240	mV
Output Voltage	V_{OUT}	$27\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$	22.8		25.2	V
Current Dissipation	I_{CC}	$T_j=25^\circ\text{C}$		5.0	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$27\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $I_{\text{OUT}}=200\text{mA}$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$			170	μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$ $28\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $T_j=25^\circ\text{C}$			50	dB
		$I_{\text{OUT}}=100\text{mA}$			70	dB
		$I_{\text{OUT}}=300\text{mA}$				
Minimum Input-Output Voltage Drop	V_{drop}	$I_{\text{OUT}}=350\text{mA}$			2.0	V
Short Current	I_{OS}	$T_j=25^\circ\text{C}, V_{\text{IN}}=35\text{V}, \text{ to GND}$			300	mA
Peak Output Current	I_{op}	$T_j=25^\circ\text{C}$			0.7	A

L78M05,06,07,08,09,10,12,15,18,20,24 T-58-11-13

Specified Test Circuit (Common to L78M00 series)

