

# Silicon Switching Diode

**1N4153,  
1N4153-1**


# DO-35 Glass Package

## Applications

Used in general purpose applications, where a low current controlled forward characteristic and fast switching speed are important.

## Features

- Six sigma quality
- Metallurgically bonded
- BKC's Sigma Bond™ plating for problem free solderability
- LL-34/35 MELF SMD available
- Full approval to Mil-S-19500/337
- Available up to JANTXV-1 levels
- "S" level screening available to SCDs

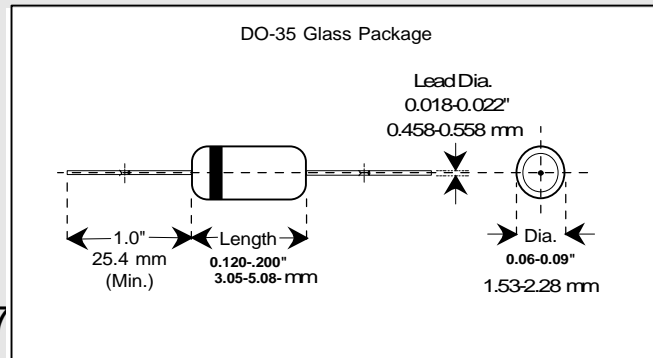

Maximum Ratings	Symbol	Value	Unit	
Peak Inverse Voltage	PIV	75 (Min.)	Volts	
Average Rectified Current	$I_{Avg}$	150	mAmps	
Continuous Forward Current	$I_{Fdc}$	300	mAmps	
Peak Surge Current ( $t_{peak} = 1$ Sec.)	$I_{peak}$	0.25	Amp	
BKC Power Dissipation $T_L = 50^\circ C, L = 3/8"$ from body	$P_{tot}$	500	mWatts	
Operating and Storage Temperature Range	$T_{Op \& St}$	-65 to +200	$^\circ C$	
Electrical Characteristics @ 25 $^\circ C^*$	Symbol	Minimum	Maximum	Unit
Forward Voltage @ $I_F = 100 \mu A$ $V_F$	$V_f$	0.49	0.55	Volts
Forward Voltage @ $I_F = 250 \mu A$ $V_F$	$V_f$	0.53	0.59	Volts
Forward Voltage @ $I_F = 1.0$ mA $V_F$	$V_f$	0.59	0.67	Volts
Forward Voltage @ $I_F = 2.0$ mA $V_F$	$V_f$	0.62	0.70	Volts
Forward Voltage @ $I_F = 10$ mA $V_F$	$V_F$	0.70	0.81	Volts
Forward Voltage @ $I_F = 20$ mA $V_F$	$V_F$	0.74	0.88	Volts
Reverse Leakage Current @ $V_R = 50$ V	$I_R$		0.05(50 @ 150 $^\circ C$ )	$\mu A$
Breakdown Voltage @ $I_R = 5.0 \mu A$	PIV	75		Volts
Capacitance @ $V_R = 0$ V, $f = 1$ MHz	$C_T$		2.0	pF
Reverse Recovery Time (note 1)	$t_{rr}$		4.0	nSecs
Reverse Recovery Time (note 2)	$t_{rr}$		2.0	nSec

Note 1: Per Method 4031-A with  $I_F = I_R = 10$  mA,  $R_L = 100$  Ohms,  $C = 3$  Pf. \*Unless Otherwise Specified

Note2: Per Method 4031-A with  $I_F = I_R = 10$  mA,  $R_r = 6$  Volts,  $R_l = 100$  ohms.



6 Lake Street - Lawrence, MA 01841



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.