

GP1S28

Subminiature Photointerrupter

■ Features


1. Ultra-compact
2. PWB mounting type package
3. High sensing accuracy (Slit width 0.3mm)
4. With mounting boss

■ Applications

1. Cameras
2. Floppy disk drives

■ Outline Dimensions

(Unit : mm)

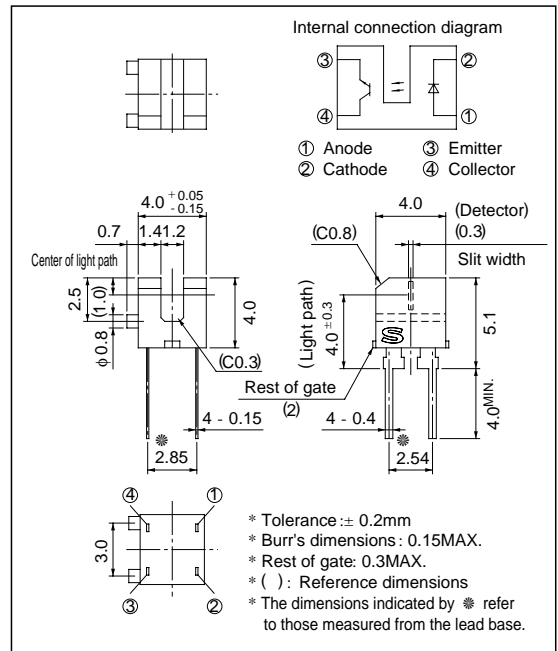


■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter	Symbol	Rating	Unit	
Input	Forward current	I _F	50	mA
	Reverse voltage	V _R	6	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	V _{CEO}	35	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	20	mA
	Collector power dissipation	P _C	75	mW
Total power dissipation	P _{tot}	100	mW	
Operating temperature	T _{opr}	- 25 to + 85	°C	
Storage temperature	T _{stg}	- 40 to + 100	°C	
*1 Soldering temperature	T _{sol}	260	°C	

*1 For 5 seconds



■ Electro-optical Characteristics

(T_a = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	V _F	I _F = 20mA	-	1.2	1.4	V	
	Reverse current	I _R	V _R = 3V	-	-	10	μA	
Output	Collector dark current	I _{CEO}	V _{CE} = 20V	-	-	1 x 10 ⁻⁷	A	
Transfer characteristics	Collector Current	I _C	V _{CE} = 5V, I _F = 5mA	100	-	1300	μA	
	Collector-emitter saturation voltage	V _{CE(sat)}	I _F = 10mA, I _C = 50 μA	-	-	0.4	V	
	Response time	Rise time	t _r	V _{CE} =5V, R _L =1kΩ	-	50	150	μs
		Fall time	t _f	I _C =100 μA	-	50	150	μs

Fig. 1 Forward Current vs. Ambient Temperature

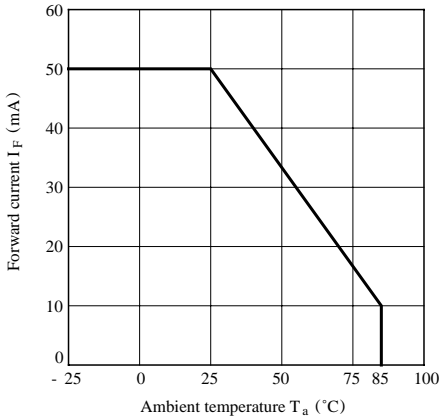


Fig. 2 Power Dissipation vs. Ambient Temperature

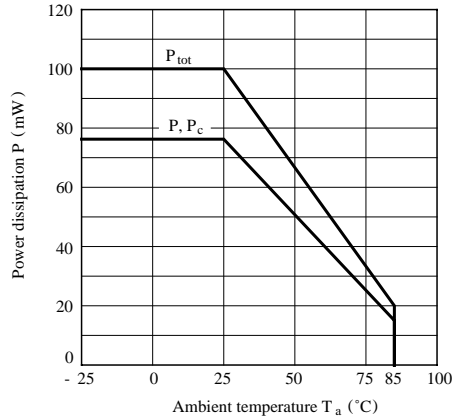


Fig. 3 Forward Current vs. Forward Voltage

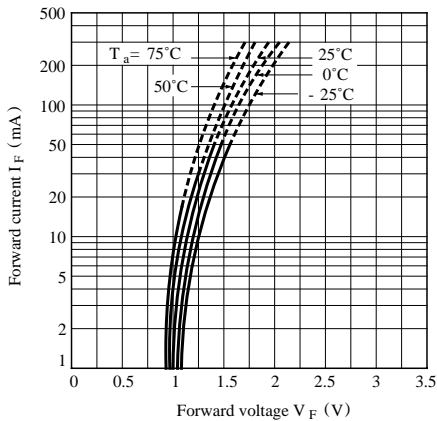


Fig. 4 Collector Current vs. Forward Current

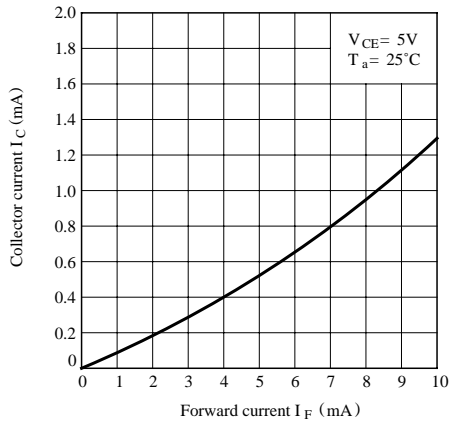


Fig. 5 Collector Current vs. Collector-emitter Voltage

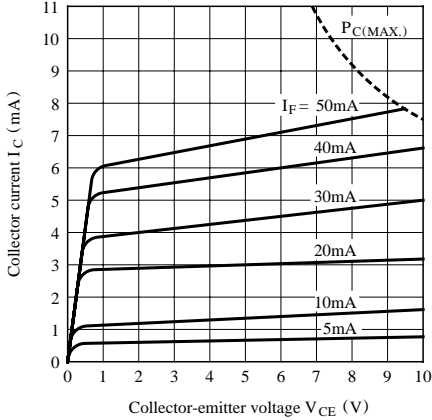


Fig. 6 Collector Current vs. Ambient Temperature

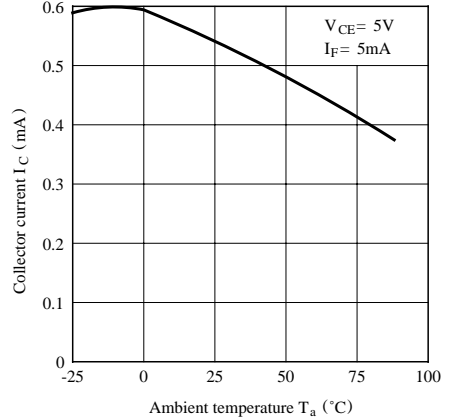


Fig. 7 Collector-emitter Saturation Voltage vs. Ambient Temperature

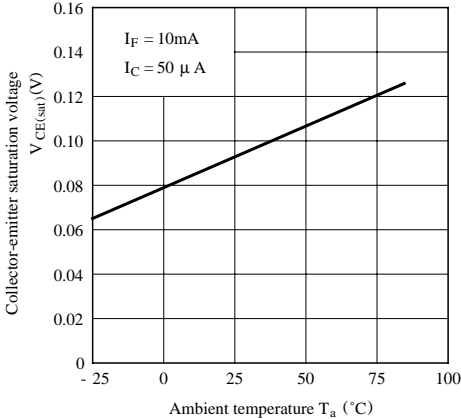


Fig. 8 Response Time vs. Load Resistance


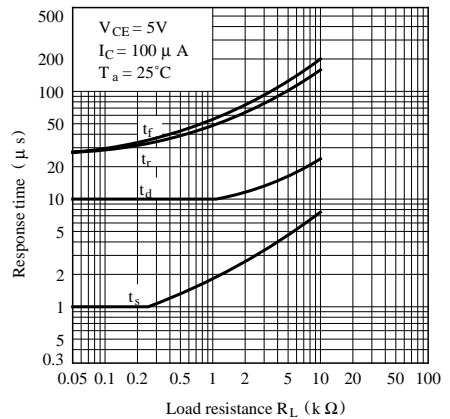


Fig. 9 Collector Dark Current vs. Ambient Temperature

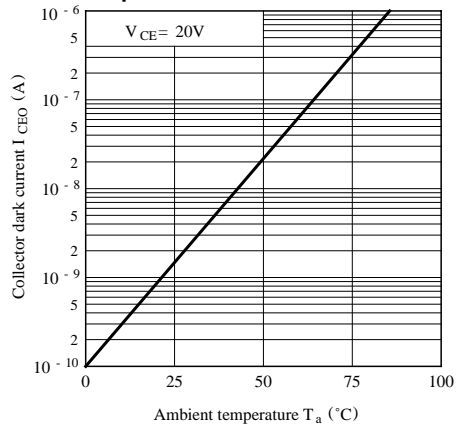

Test Circuit for Response Time

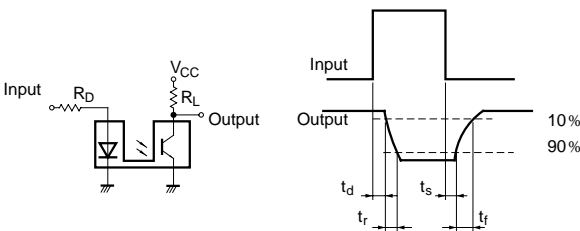


Fig.10 Relative Collector Current vs. Shield Distance (1)


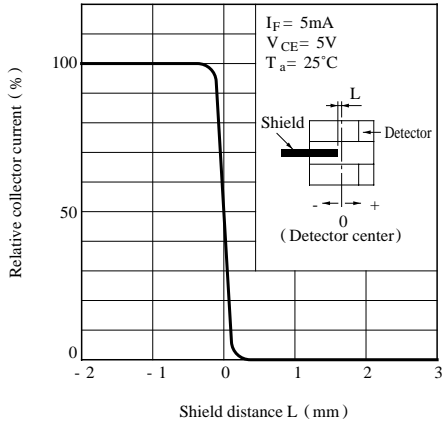


Fig.11 Relative Collector Current vs. Shield Distance (2)



- Please refer to the chapter “Precautions for Use”.

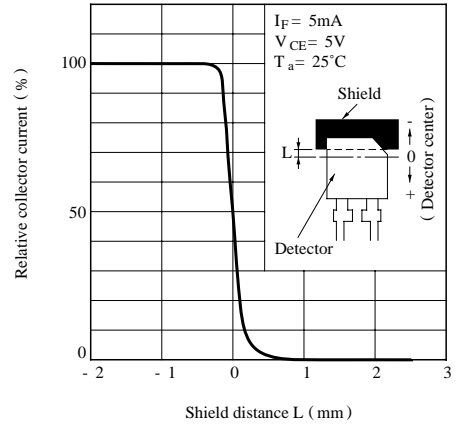

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.