


MA2450

OUTLINE DIMENSIONS

Case : MA7

Unit : mm

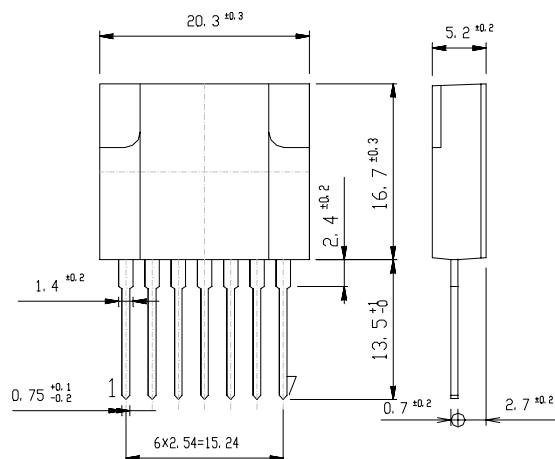

RATINGS

●Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Storage Temperature	T _{stg}		-30~125	-30~125	°C
Operating Temperature	T _{op}	Case Temperature	-20~125	-20~125	°C
Junction Temperature	T _j		150	150	°C
Peak Input Voltage	V _{in}	②+,④-,Fig.1 is Measurement Circuit of Peak Input Voltage V _{in} and Collector Cutoff Current I _{CEX} .	500	500	V
Input Current	I _{in}	Pulse Pulse Width 150 μs MAX, Duty 1/2, Sawtooth Wave, Peak Value, ②+,④-	10	10	A
Maximum Operating Frequency	f(max)		200	200	kHz
Maximum Power Dissipation	P _D	T _a =25°C	3	3	W
	P _D	Heatsink T _c =100°C	20	20	W
Dielectric Strength	V _{dis}	Terminals To Case AC 1 min	2	2	kV
Insulation Resistance		Terminals To Case 500VDC	100	100	MΩ
Fold Back Control Voltage	V _{CONT(max)}	Fold Control Resistance=0Ω Duty 1/2, ④,⑦	±8	±8	V
Fold Back Control Current	I _{CONT(max)}	④-,⑥+	100	100	mA

●Electrical Characteristics (T_c=25°C)

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Q1	Collector Cutoff Current	I _{CEX} V _{CE} =500V, Fig.1 is Measurement Circuit of Peak Input Voltage V _{in} and Collector Cutoff Current I _{CEX} , ②+,④-	MAX 0.1	MAX 0.1	mA
	DC Current Gain	h _{FE} V _{CE} = 5V, I _C = 5A, ②+,④-,⑤I _B	15~30	-	
	Collector to Emitter Saturation Voltage	V _{CE(sat)} I _C =5.0A, I _B =1.0A, ②+,④-,⑤I _B	MAX 1.0	MAX 1.0	V
	Thermal Resistance	θ _{jc} Junction to Case	MAX 2.5	MAX 2.5	°C/W
D1	Reverse Current	I _R V _R =450V,①+,②-	MAX 10	MAX 10	μA
	Forward Voltage	V _F I _F =0.6A,①-,②+	MAX 1.7	MAX 1.7	V
Driving Saturation Voltage	V _{D(sat)}	I _C =1.5A, I _B =0.3A, ⑤+,④-	MIN 1.7	MIN 1.7	V
			MAX 2.3	MAX 2.3	

●Standard Operating Condition・Design Standard For Application Circuit

Item	Conditions	Ratings		Unit
		P Class	N Class	
Input Rated Voltage		AC90~132	AC90~132	V
Output Nominal Wattage		100	100	W
Output Nominal Voltage		15	15	V
Output Nominal Current		6.6	6.6	A

●Standard Operating Condition・Standard Operating Characteristics (Ta=25°C)

Item		Conditions	Ratings		Unit	
			P Class	N Class		
Minimum Input Full Load Output Voltage		Vin=90V, IO=6.6A	15.0±0.75	15.0±0.75	V	Fig 2, ① Refer
Maximum Input Light Load Output Voltage		Vin=132V, IO=0.66A	15.0±0.75	15.0±0.75	V	Fig 2, ② Refer
AC Input Voltage		IO=6.6A	MAX 85	MAX 85	V	
Over Current Protection	Foldback Current	Vin=132V, VO=12V	MAX 10	MAX 10	A	Fig 2, ③ Refer
	Short Circuit	Vin=132V, RO=0.5Ω	Nodamage To Any Device, Automatic Recovery.		-	Fig 2, ④ Refer
Output Ripple Noise		Vin=90~132V, IO=0.66~6.6A	MAX 150	MAX 150	mV P-P	

Figure in ○=Terminal Sign




Fig1. Measurement Circuit






Fig2. Output Voltage/Current

MA2450 Transient Thermal Impedance

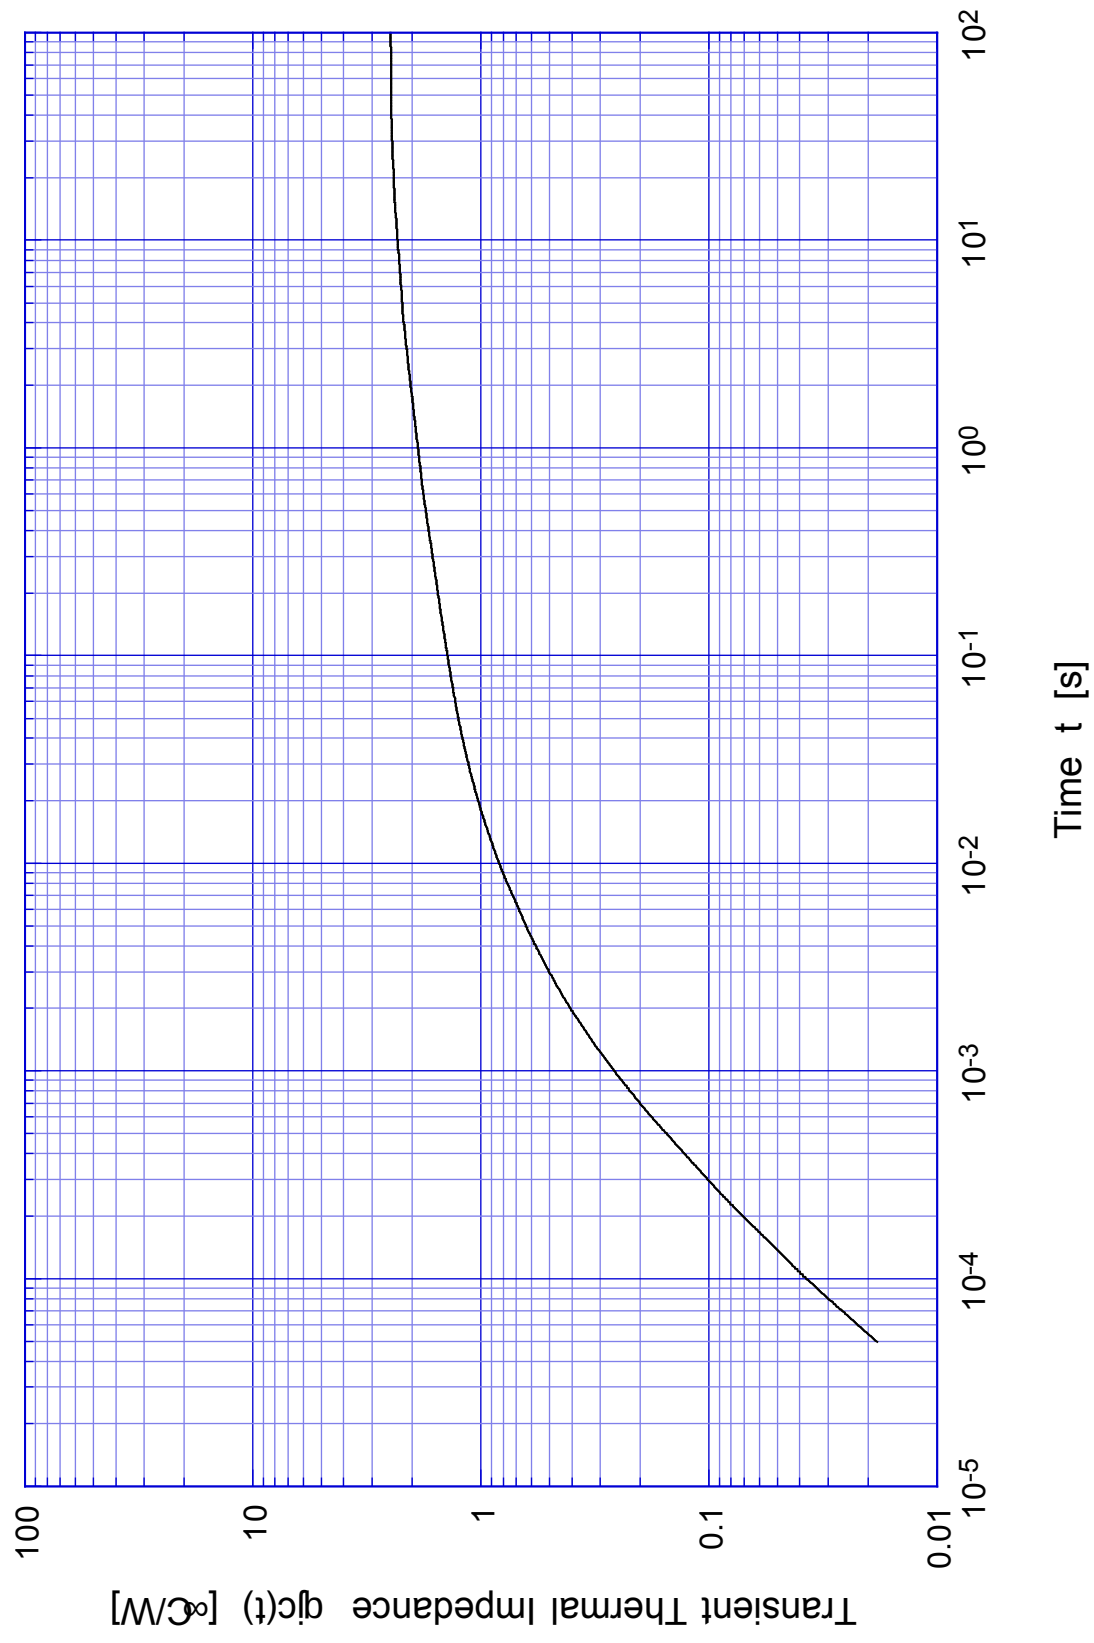


MA2450

Forward Bias SOA

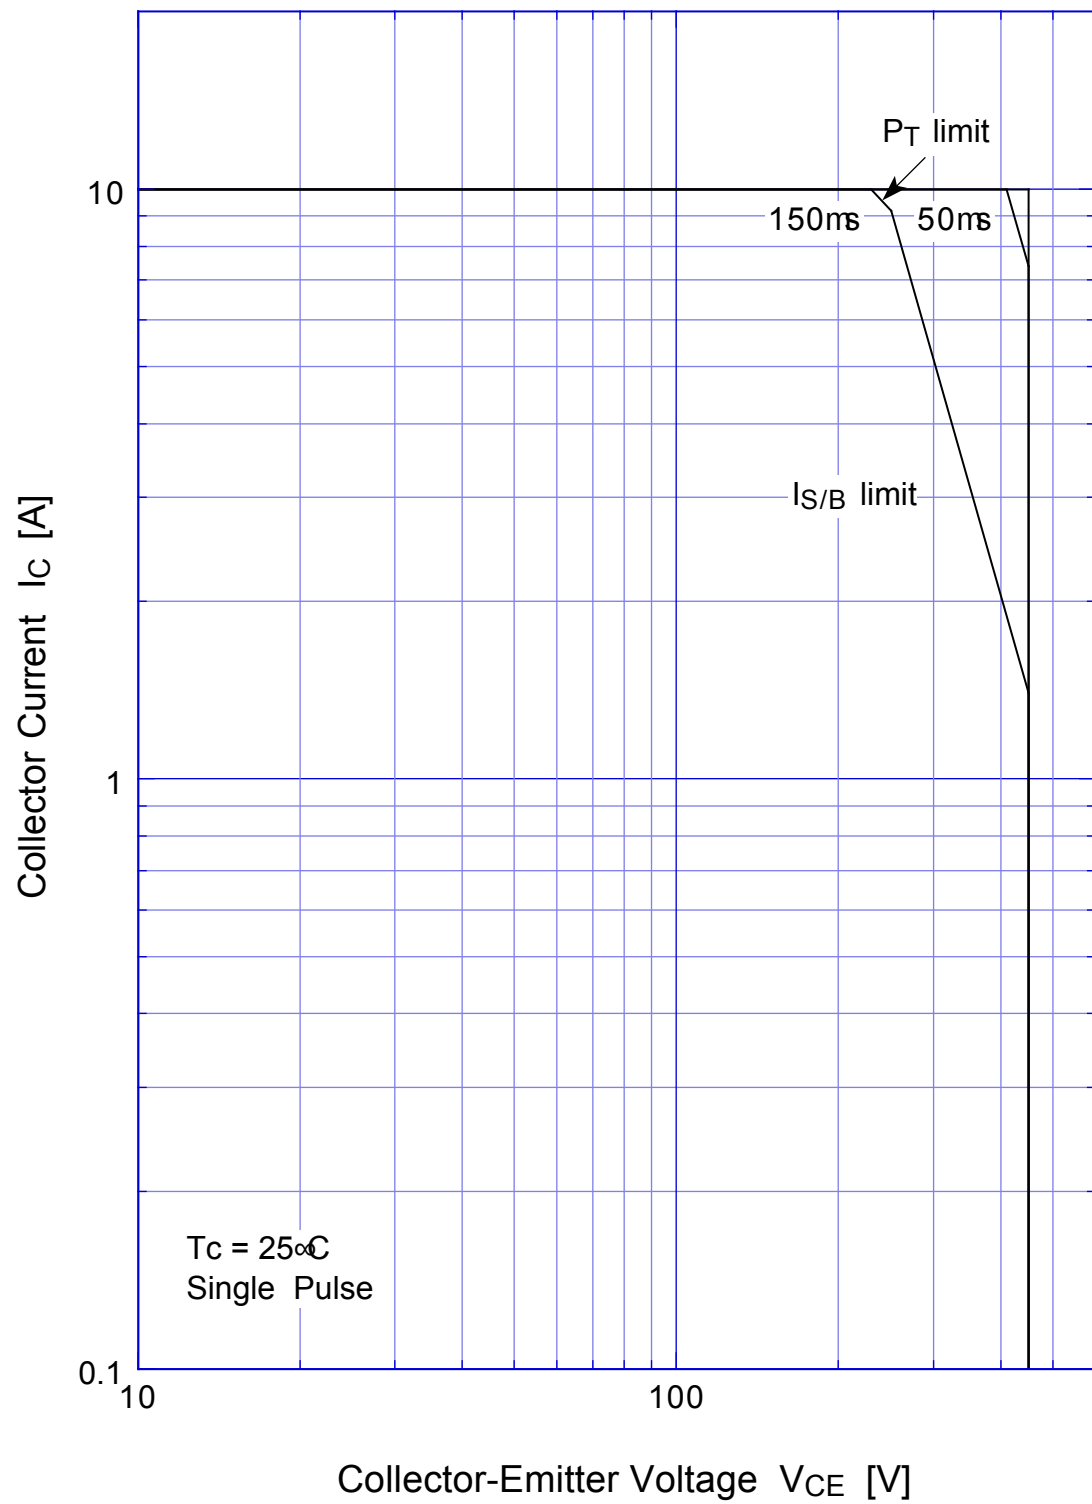


MA2450

Collector Current Derating

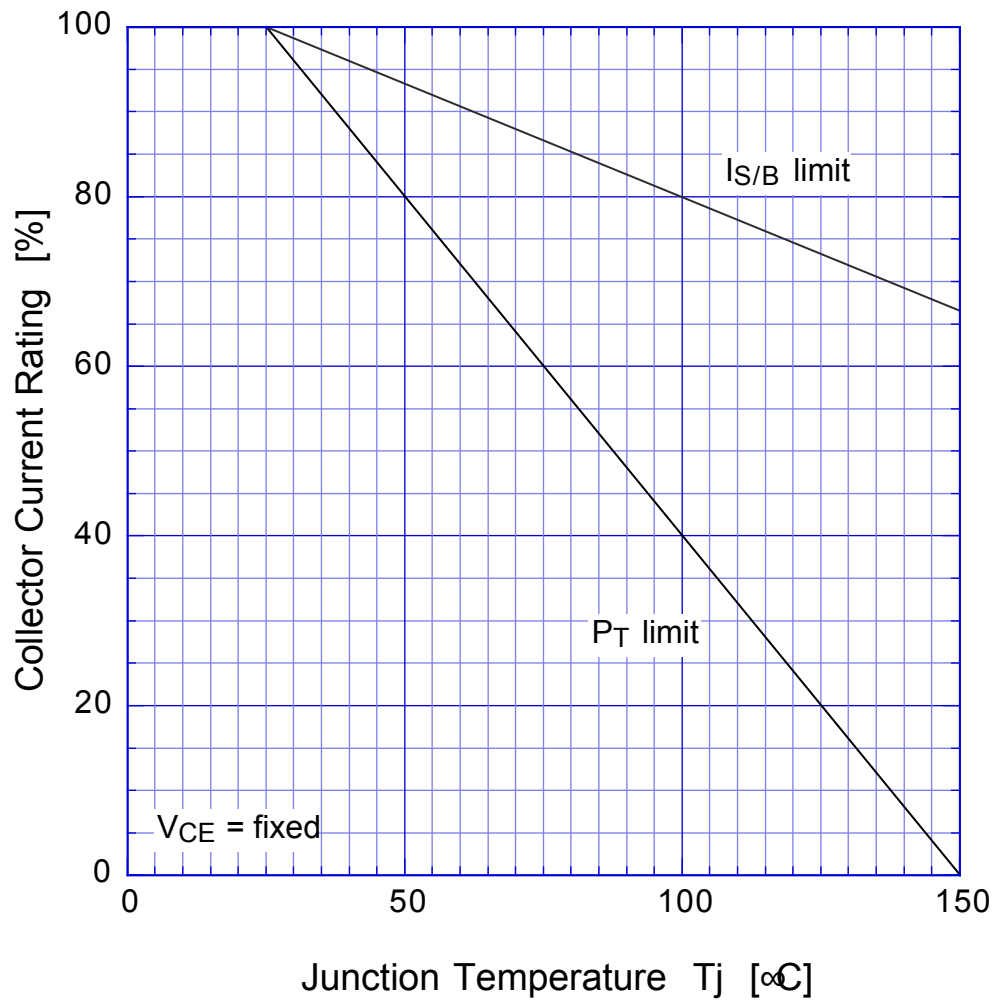

MA2450

Reverse Bias SOA

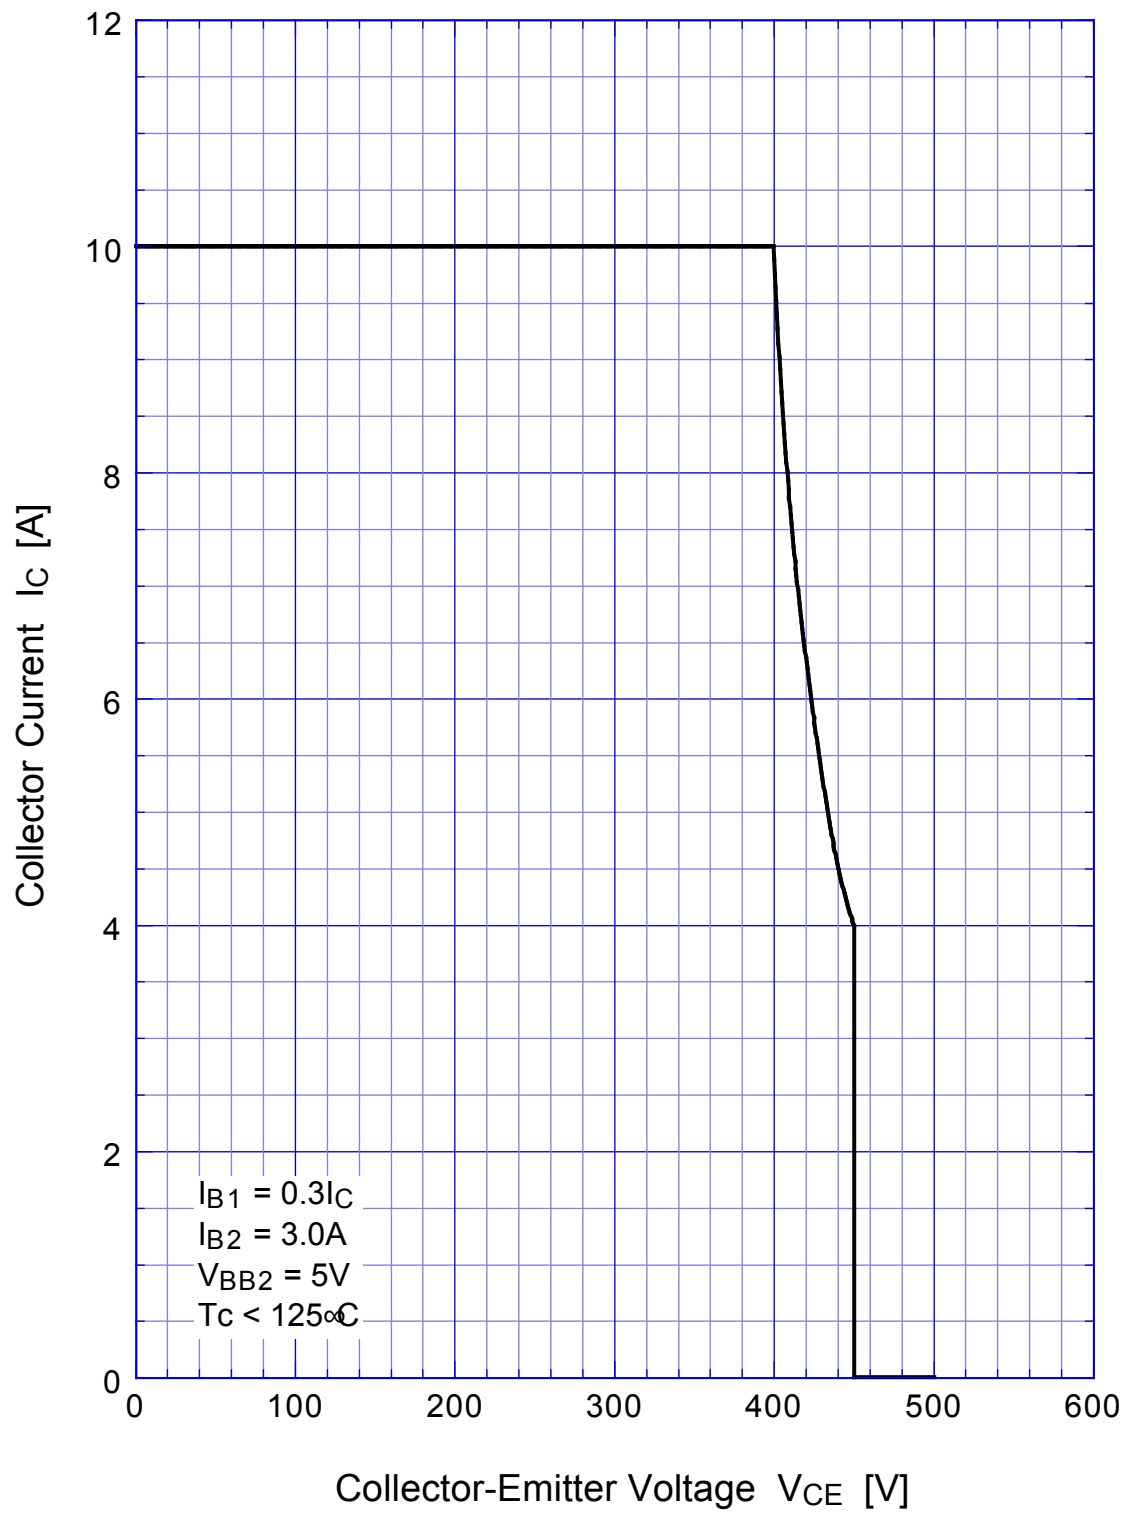

MA2450

$h_{FE} - I_C$

