


NPN Silicon High-Voltage Transistors

- Suitable for video output stages in TV sets and switching power supplies
- High breakdown voltage
- Low collector-emitter saturation voltage
- Complementary types: BFN 37, BFN 39 (PNP)

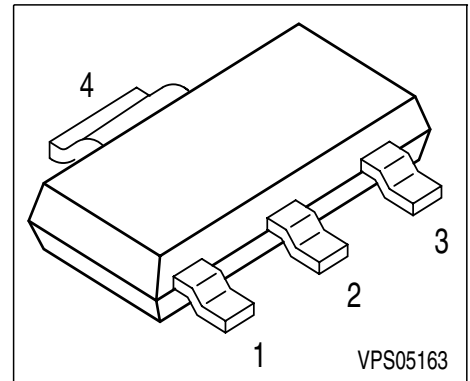

| Type | Marking | Pin Configuration | | | | Package |
|--------|---------|-------------------|-------|-------|-------|---------|
| BFN 36 | BFN 36 | 1 = B | 2 = C | 3 = E | 4 = C | SOT-223 |
| BFN 38 | BFN 38 | 1 = B | 2 = C | 3 = E | 4 = C | SOT-223 |

Maximum Ratings

| Parameter | Symbol | BFN 36 | BFN 38 | Unit |
|--|-----------|-------------|--------|------|
| Collector-emitter voltage | V_{CEO} | 250 | 300 | V |
| Collector-base voltage | V_{CBO} | 250 | 300 | |
| Emitter-base voltage | V_{EBO} | 5 | 5 | |
| DC collector current | I_C | 200 | | mA |
| Peak collector current | I_{CM} | 500 | | |
| Base current | I_B | 100 | | |
| Peak base current | I_{BM} | 200 | | |
| Total power dissipation, $T_S = 124\text{ °C}$ | P_{tot} | 1.5 | | W |
| Junction temperature | T_j | 150 | | °C |
| Storage temperature | T_{stg} | -65 ... 150 | | |

Thermal Resistance

| | | | |
|--------------------------------|------------|-----|-----|
| Junction ambient ¹⁾ | R_{thJA} | ≤72 | K/W |
| Junction - soldering point | R_{thJS} | ≤17 | K/W |

1) Package mounted on pcb 40mm x 40mm x 1.5mm / 6cm² Cu

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

| Parameter | Symbol | Values | | | Unit |
|--|---------------|--------|------|------|---------------|
| | | min. | typ. | max. | |
| DC Characteristics | | | | | |
| Collector-emitter breakdown voltage $I_C = 1 \text{ mA}, I_B = 0$ | $V_{(BR)CEO}$ | | | | V |
| BFN 36 | | 250 | - | - | |
| BFN 38 | | 300 | - | - | |
| Collector-base breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$ | $V_{(BR)CBO}$ | | | | |
| BFN 36 | | 250 | - | - | |
| BFN 38 | | 300 | - | - | |
| Emitter-base breakdown voltage $I_E = 100 \mu\text{A}, I_C = 0$ | $V_{(BR)EBO}$ | 5 | - | - | |
| Collector cutoff current $V_{CB} = 200 \text{ V}, I_E = 0$ | I_{CBO} | | | | nA |
| BFN 36 | | - | - | 100 | |
| $V_{CB} = 250 \text{ V}, I_E = 0$ | BFN 38 | - | - | 100 | |
| Collector cutoff current $V_{CB} = 200 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$ | I_{CBO} | | | | μA |
| BFN 36 | | - | - | 20 | |
| $V_{CB} = 250 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$ | BFN 38 | - | - | 20 | |
| Emitter cutoff current $V_{EB} = 4 \text{ V}, I_C = 0$ | I_{EBO} | - | - | 100 | nA |
| DC current gain 1) $I_C = 1 \text{ mA}, V_{CE} = 10 \text{ V}$ | h_{FE} | 25 | - | - | - |
| $I_C = 10 \text{ mA}, V_{CE} = 10 \text{ V}$ | | 40 | - | - | |
| $I_C = 30 \text{ mA}, V_{CE} = 10 \text{ V}$ | BFN 36 | 40 | - | - | |
| | BFN 38 | 30 | - | - | |
| Collector-emitter saturation voltage 1) $I_C = 20 \text{ mA}, I_B = 2 \text{ mA}$ | V_{CEsat} | | | | V |
| BFN 36 | | - | - | 0.4 | |
| BFN 38 | | - | - | 0.5 | |
| Base-emitter saturation voltage 1) $I_C = 20 \text{ mA}, I_B = 2 \text{ mA}$ | V_{BEsat} | - | - | 0.9 | |


 1) Pulse test: $t < 300\mu\text{s}$; $D < 2\%$

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

| Parameter | Symbol | Values | | | Unit |
|---|----------|--------|------|------|------|
| | | min. | typ. | max. | |
| AC Characteristics | | | | | |
| Transition frequency $I_C = 20\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 20\text{ MHz}$ | f_T | - | 70 | - | MHz |
| Collector-base capacitance $V_{CB} = 30\text{ V}$, $f = 1\text{ MHz}$ | C_{cb} | - | 1.5 | - | pF |


Total power dissipation $P_{tot} = f(T_A^*; T_S)$

* Package mounted on epoxy

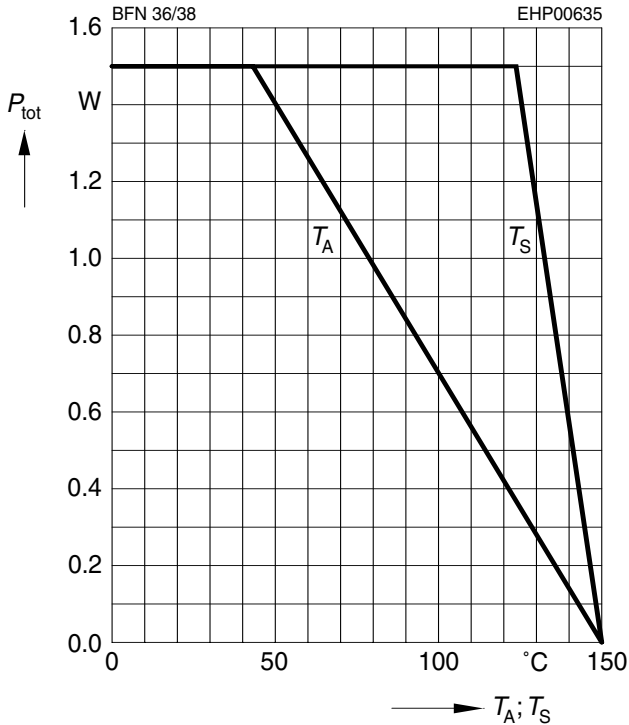


Collector current $I_C = f(V_{BE})$

$V_{CE} = 10V$

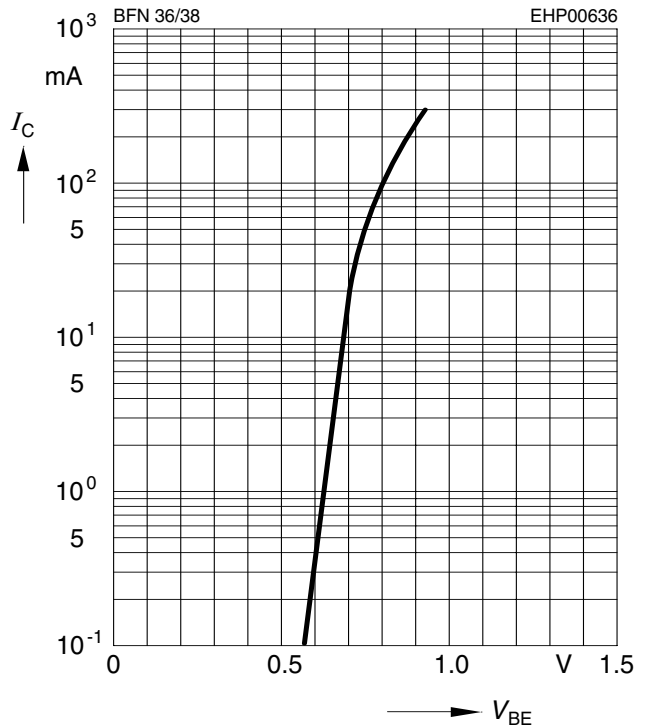


Permissible pulse load

$P_{totmax} / P_{totDC} = f(t_p)$

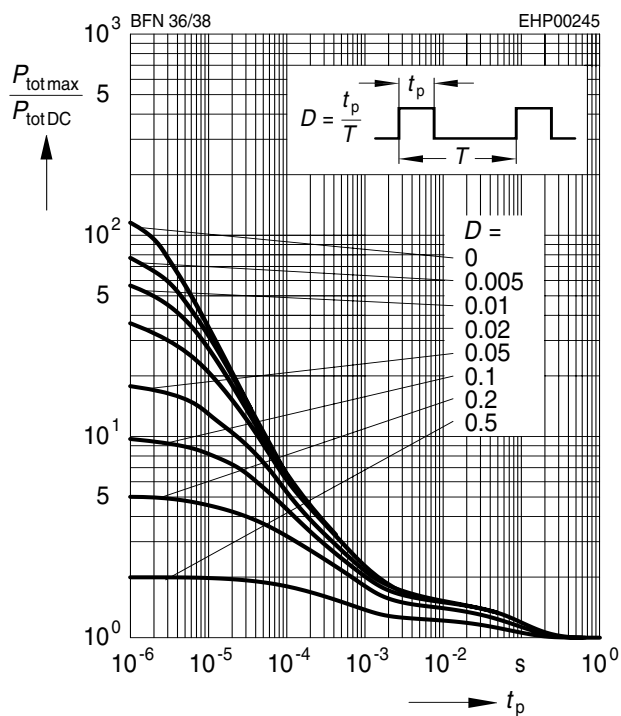


Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 30V$

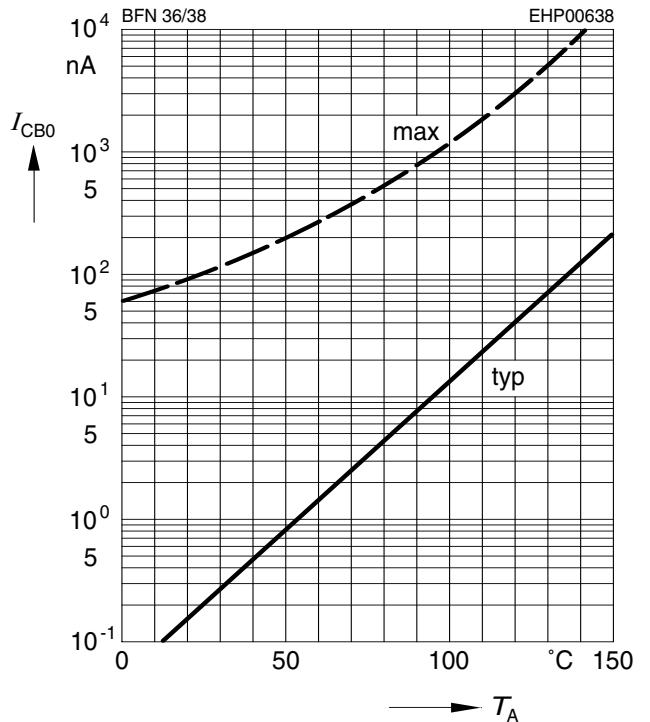


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 10V$

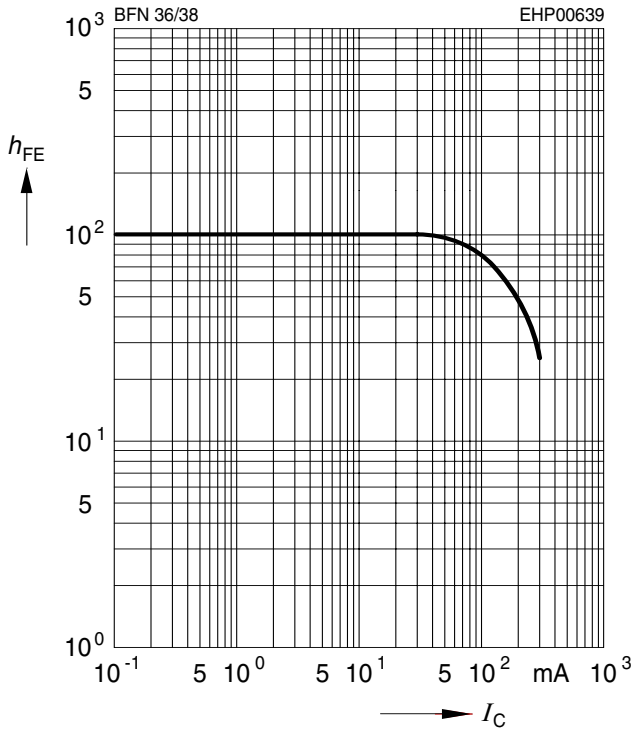

Transition frequency $f_T = f(I_C)$

$V_{CE} = 10V, f = 100MHz$

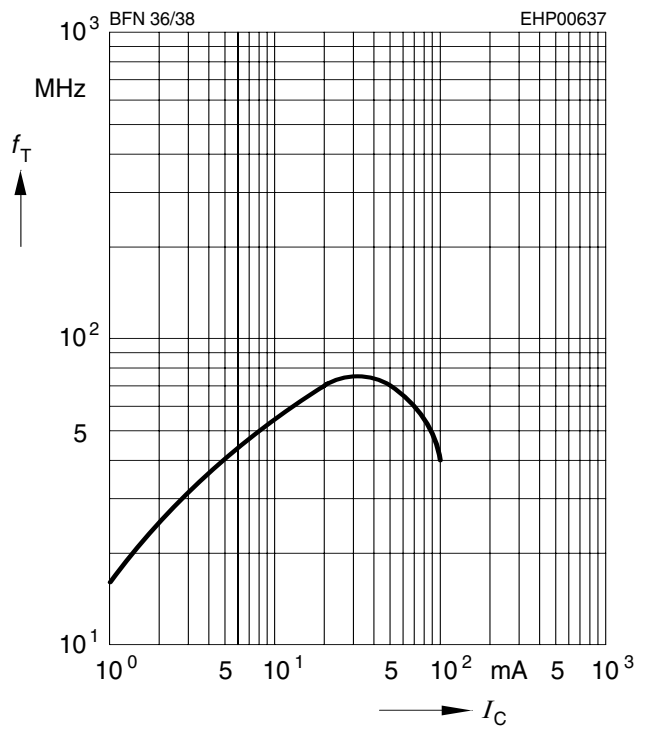



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.