


PNP Silicon RF Transistor

- For VHF oscillator applications

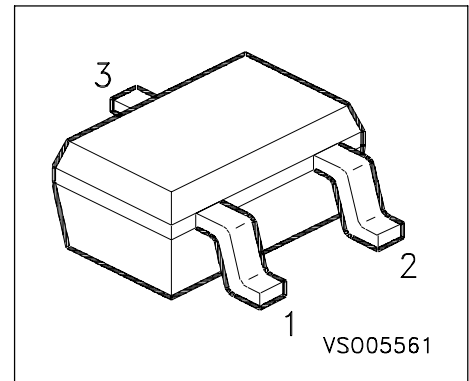

Type	Marking	Ordering Code	Pin Configuration			Package
BF 660W	LEs	Q62702-F1568	1 = B	2 = E	3 = C	SOT-323

Maximum Ratings

Parameter	Symbol	Values	Unit
Collector-emitter voltage	V_{CEO}	30	V
Collector-base voltage	V_{CBO}	40	
Emitter-base voltage	V_{EBO}	4	
Collector current	I_C	25	mA
Base current	I_B	5	
Total power dissipation $T_S \leq 93\text{ °C}$	P_{tot}	280	mW
Junction temperature	T_j	150	
Storage temperature	T_{stg}	- 65 ... + 150	

Thermal Resistance


Junction - soldering point	R_{thJS}	205	K/W
----------------------------	------------	-----	-----

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 1 \text{ mA}, I_B = 0$	$V_{(BR)CEO}$	30	-	-	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_E = 0$	$V_{(BR)CBO}$	40	-	-	
Base-emitter breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(BR)EBO}$	4	-	-	
Collector-base cutoff current $V_{CB} = 20, I_E = 0$	I_{CBO}	-	-	50	nA
DC current gain $I_C = 3 \text{ mA}, V_{CE} = 10 \text{ V}$	h_{FE}	30	-	-	-
AC Characteristics					
Transition frequency $I_C = 5 \text{ mA}, V_{CE} = 10 \text{ V}, f = 100 \text{ MHz}$	f_T	-	700	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, V_{BE} = v_{be} = 0, f = 1 \text{ MHz}$	C_{cb}	-	0.4	-	pF
Collector-emitter capacitance $V_{CE} = 10 \text{ V}, V_{BE} = v_{be} = 0, f = 1 \text{ MHz}$	C_{ce}	-	0.15	-	

Total power dissipation $P_{tot} = f(T_A^*, T_S)$


* Package mounted on epoxy

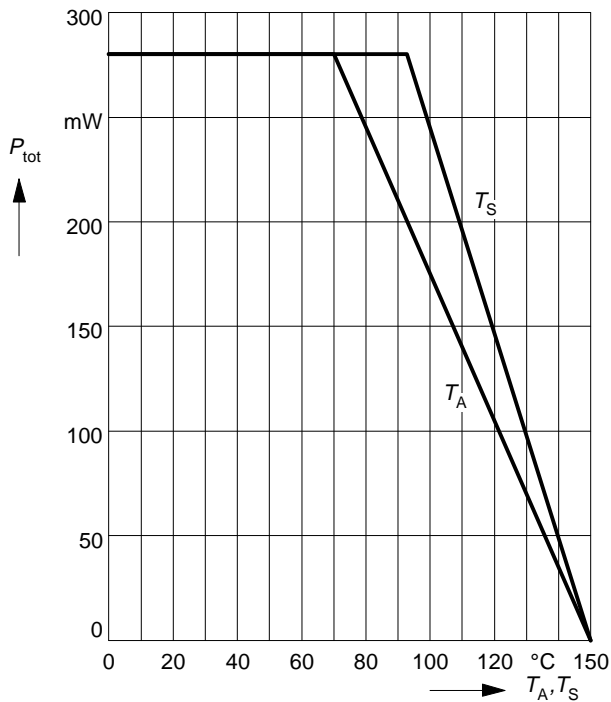

Permissible Pulse Load $R_{thJS} = f(t_p)$

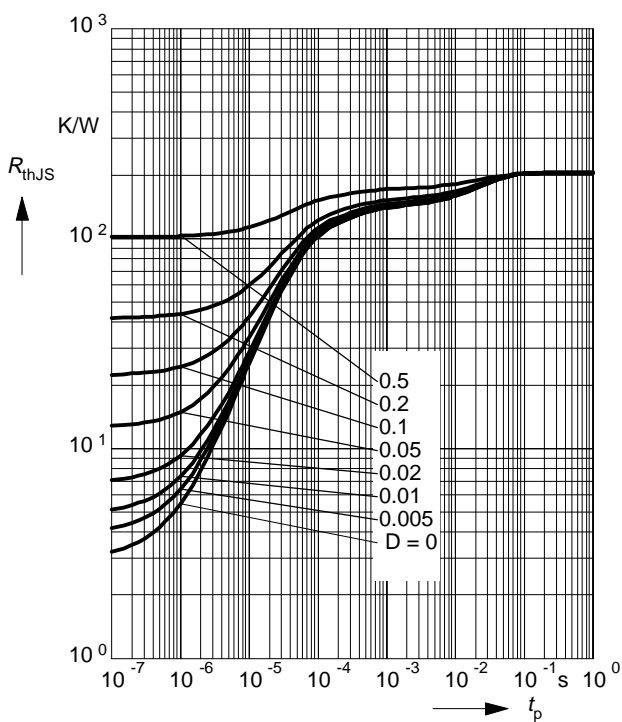


Permissible Pulse Load $P_{totmax}/P_{totDC} = f(t_p)$

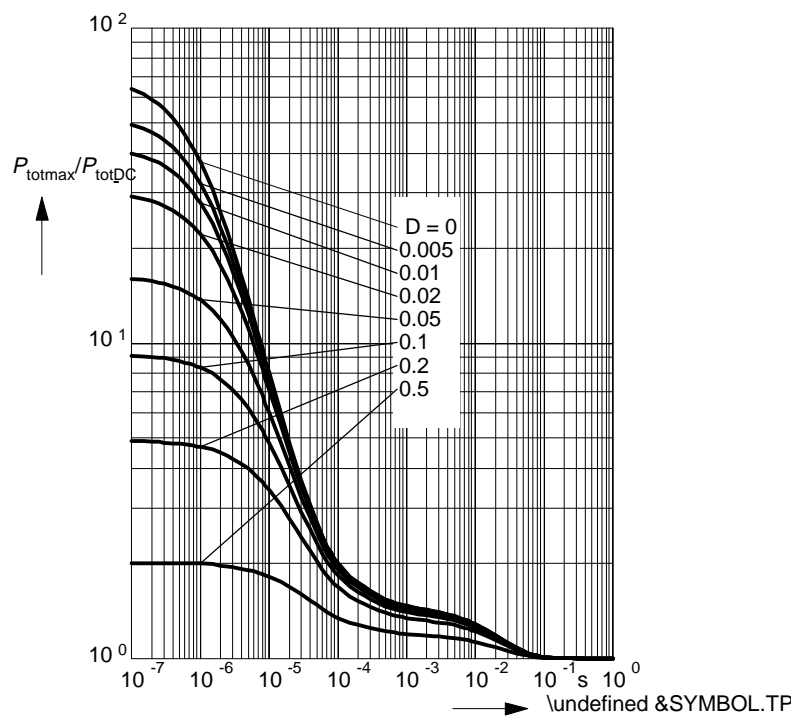

Transition frequency $f_T = f(I_C)$


$f = 100\text{MHz}$

$V_{CE} = 10\text{V}$

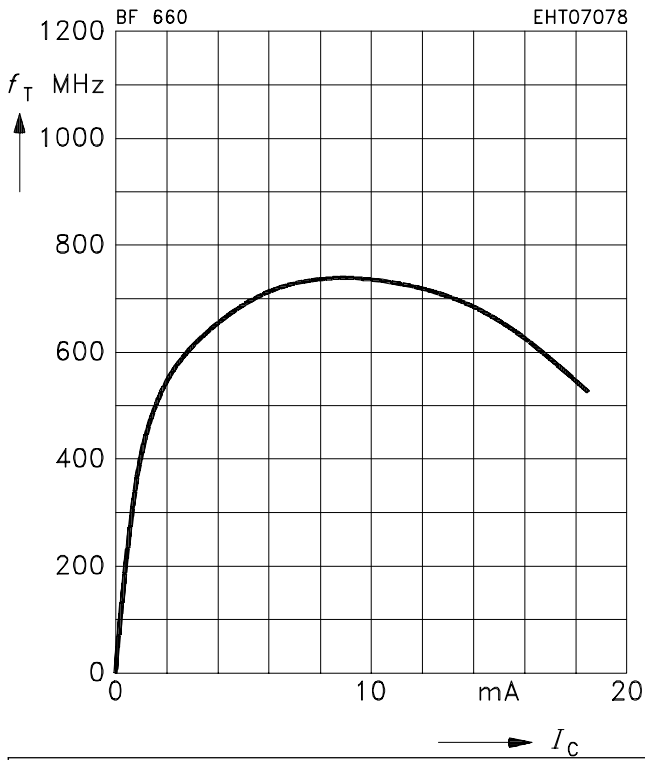


Collector-base capacitance $C_{cb} = f(V_{CB})$

$V_{BE} = v_{be} = 0, f = 1\text{MHz}$

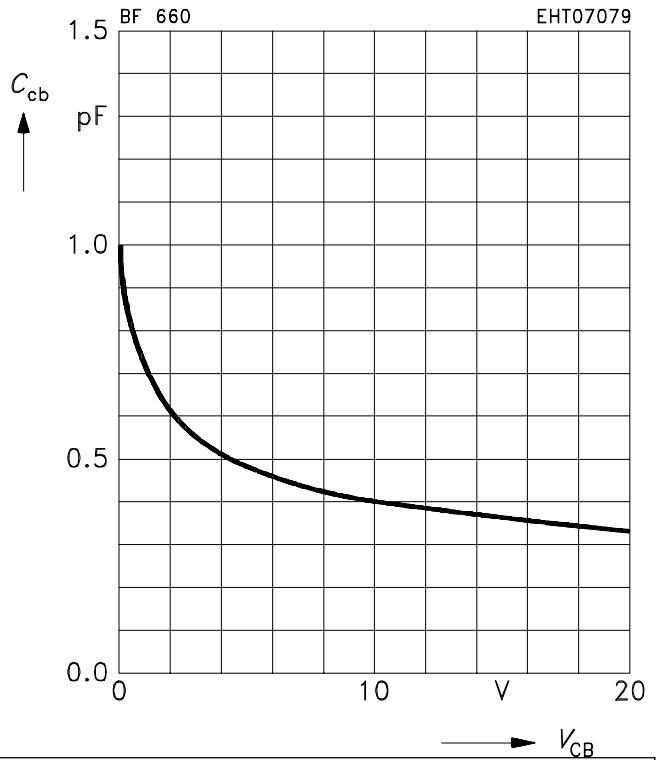

Package

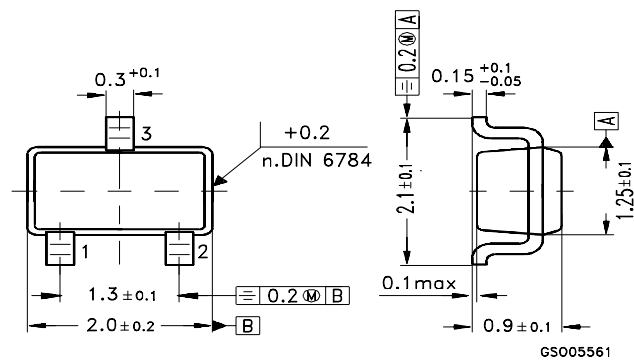



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.