



PM45302F

SILICON N-CHANNEL MOS FET MODULE

HIGH SPEED POWER SWITCHING

FEATURES

- Equipped with Power MOS FET
- Low On-Resistance
- High Speed Switching
- Low Drive Current
- Wide Area of Safe Operation
- Inherent Parallel Diode between Source and Drain
- Isolated Base from Terminal
- Suitable for Motor Driver, Switching Regulator and etc.

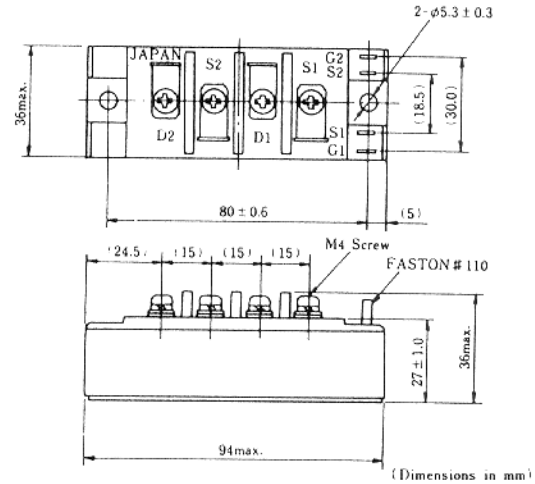

Symbol	Electrode	Terminals	Remarks
S1	Source 1	M4 Screw	Power terminals
D1	Drain 1	M4 Screw	Power terminals
S2	Source 2	M4 Screw	Power terminals
D2	Drain 2	M4 Screw	Power terminals
G1	Gate 1	#110	Signal terminals
S1	Source 1	#110	Signal terminals
G2	Gate 2	#110	Signal terminals
S2	Source 2	#110	Signal terminals


ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$) (Per FET chip)

Item	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	450	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current	I_D	30	A
Drain Peak Current	$I_{D(\text{peak})}$	60	A
Body-Drain Diode Reverse Drain Current	I_{DR}	30	A
Body-Drain Diode Reverse Drain Peak Current	$I_{DR(\text{peak})}$	60	A
Channel Dissipation	P_D^*	200	W
Channel Temperature	T_{ch}	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	$-45 \sim +125$	$^\circ\text{C}$
Insulation Dielectric	V_{isol}^{**}	2000	V

* Value at $T_c = 25^\circ\text{C}$

** Base to Terminals AC 1 minute

POWER VS. TEMPERATURE DERATING

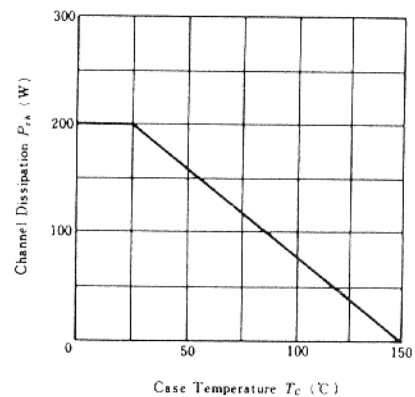

PM45302F

■ ELECTRICAL CHARACTERISTICS (Ta=25°C) (Per FET chip)


Item	Symbol	Test Condition	min.	typ.	max.	Unit
Drain-Source Breakdown Voltage	$V_{BR,DSS}$	$I_D=10mA, V_{GS}=0$	450	—	—	V
Gate-Source Leak Current	I_{GSS}	$V_{GS}=\pm 16V, V_{DS}=0$	—	—	±50	μA
Gate-Source Breakdown Voltage	$V_{BR,GSS}$	$I_G=\pm 100\mu A, V_{DS}=0$	±20	—	—	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=360V, V_{GS}=0$	—	—	1	mA
Gate-Source Threshold Voltage	$V_{GS(th)}$	$I_D=1mA, V_{DS}=10V$	1.5	—	4.0	V
Drain-Source Saturation Voltage	$V_{DS(sat)}$	$I_D=15A, V_{GS}=10V^*$	—	2.0	3.0	V
Static Drain-Source On State Resistance	$R_{DS(on)}$	$I_D=15A, V_{GS}=10V^*$	—	0.13	0.2	Ω
Forward Transfer Admittance	$ y_{fs} $	$I_D=15A, V_{DS}=10V^*$	15	25	—	S
Input Capacitance	C_{iss}	$V_{DS}=10V, V_{GS}=0$ $f=1MHz$	—	6150	—	pF
Output Capacitance	C_{oss}		—	2160	—	pF
Reverse Transfer Capacitance	C_{rss}		—	240	—	pF
Turn-on Delay Time	$t_{d(on)}$	$I_D=15A, V_{GS}=10V$ $R_L=2\Omega$	—	100	—	ns
Rise Time	t_r		—	480	—	ns
Turn-off Delay Time	$t_{d(off)}$		—	500	—	ns
Fall Time	t_f		—	400	—	ns
Body-Drain Diode Forward Voltage	V_{DF}	$I_F=15A, V_{GS}=0$	—	1.2	—	V
Body-Drain Diode Reverse Recovery Time	t_{rr}	$I_F=15A, V_{GS}=0, di_F/dt=100A/\mu s$	—	200	—	ns

* Pulse Test


■ MECHANICAL CHARACTERISTICS

Item	Symbol	Condition	Rating	Unit
Fixing Strength	—	Mounted into main-terminal with M4 screw	10~15	kg·cm
	—	Mounted into heat sink with M5 screw	15~25	kg·cm
Weight	—	Typical value	220	g


SWITCHING TIME TEST CIRCUIT

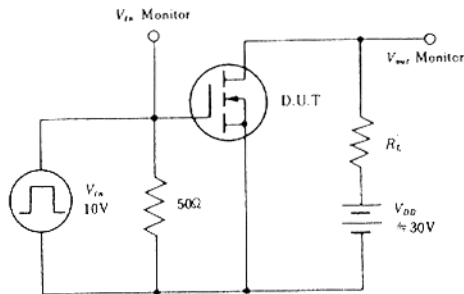


WAVEFORMS

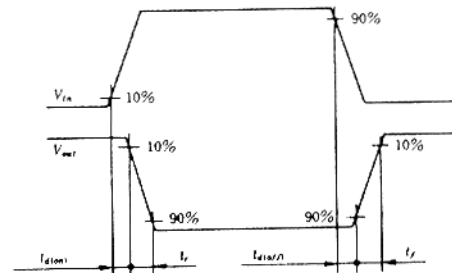


MAXIMUM SAFE OPERATION AREA

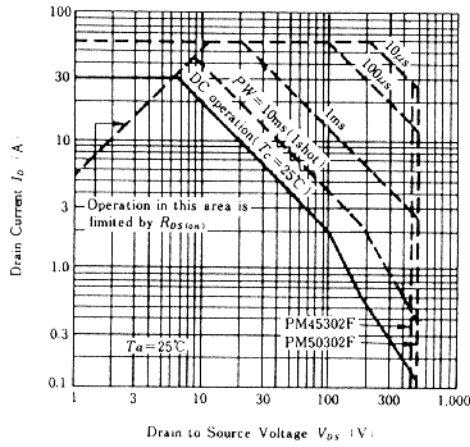


TYPICAL OUTPUT CHARACTERISTICS

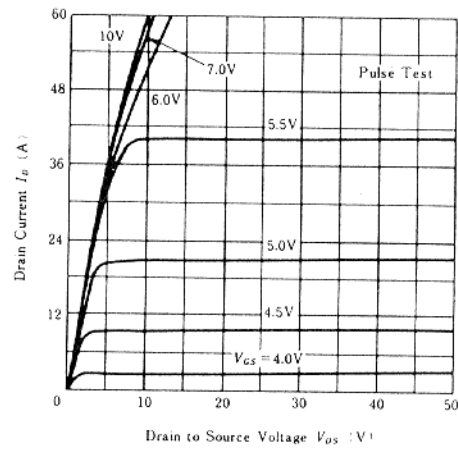


TYPICAL TRANSFER CHARACTERISTICS

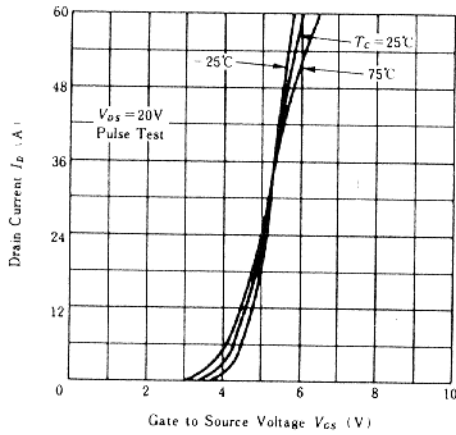


DRAIN-SOURCE SATURATION VOLTAGE VS. GATE-SOURCE VOLTAGE

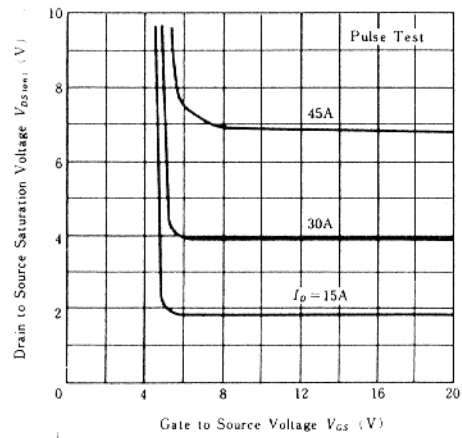


STATIC DRAIN-SOURCE ON STATE RESISTANCE VS. DRAIN CURRENT

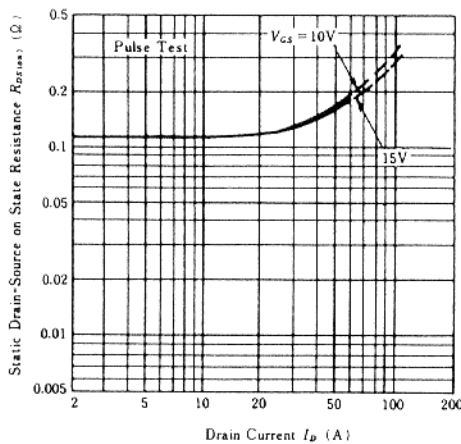


STATIC DRAIN-SOURCE ON STATE RESISTANCE VS. TEMPERATURE

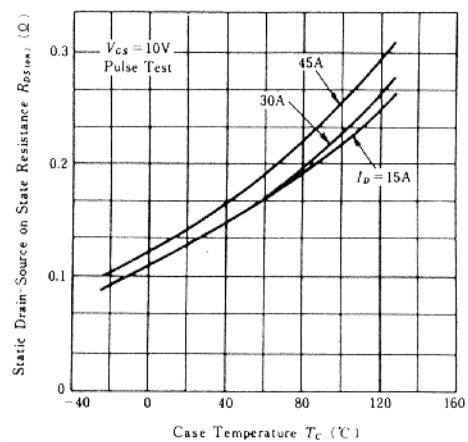


FORWARD TRANSFER ADMITTANCE VS. DRAIN CURRENT

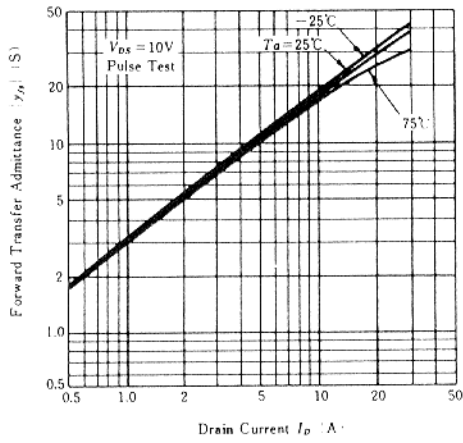


BODY-DRAIN DIODE REVERSE RECOVERY TIME

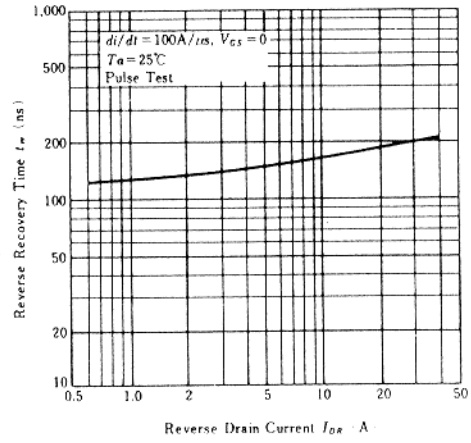


TYPICAL CAPACITANCE VS. DRAIN-SOURCE VOLTAGE

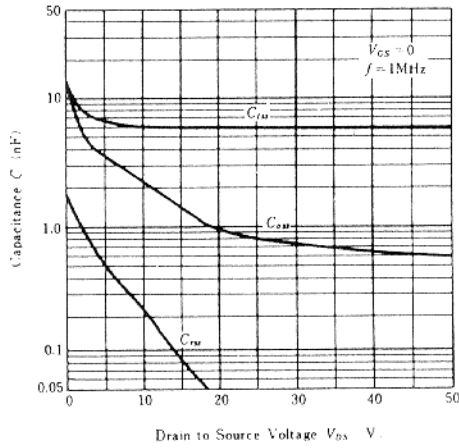

DYNAMIC INPUT CHARACTERISTICS

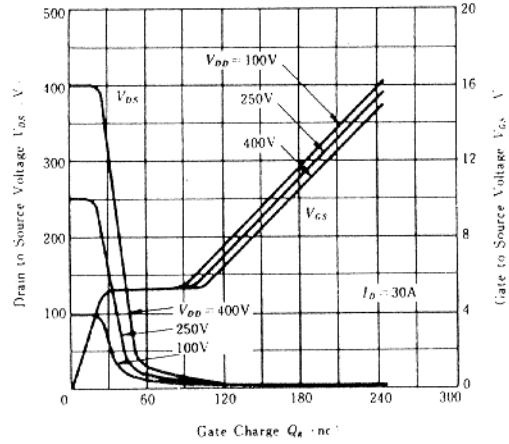

SWITCHING CHARACTERISTICS

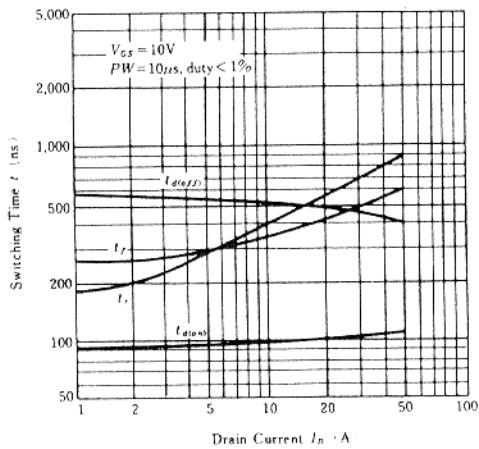

REVERSE DRAIN CURRENT VS. SOURCE TO DRAIN VOLTAGE

