


**NPN SILICON EPITAXIAL TRANSISTOR**  
**POWER MINI MOLD**

**DESCRIPTION**

The 2SD1000 is designed for audio frequency power amplifier application, especially in Hybrid Integrated Circuits.

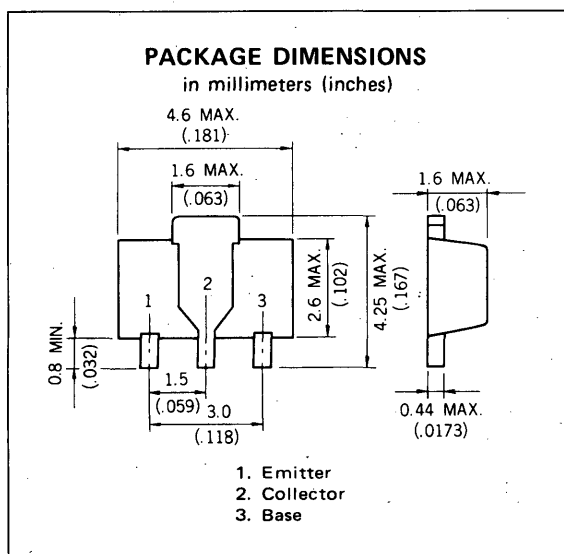

**FEATURES**

- World Standard Miniature Package : SOT-89
- Low Collector Saturation Voltage :  $V_{CE(sat)} < 0.4 \text{ V}$  ( $I_C = 500 \text{ mA}$ ,  $I_B = 50 \text{ mA}$ )
- Complements to PNP type 2SB799

**ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ \text{C}$ )**

Maximum Voltages and Currents

Collector to Base Voltage	$V_{CBO}$	60	V
Collector to Emitter Voltage	$V_{CEO}$	50	V
Emitter to Base Voltage	$V_{EBO}$	5.0	V
Collector Current (DC)	$I_C$	0.7	A
Collector Current (Pulse)*	$I_C$	1.0	A

Maximum Power Dissipation

Total Power Dissipation at $25^\circ \text{C}$ Ambient Temperature**	$P_T$	2.0	W
--	-------	-----	---

Maximum Temperatures

Junction Temperature	$T_j$	150	$^\circ \text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +150	$^\circ \text{C}$

\*PW  $\leq 10 \text{ ms}$ , duty cycle  $\leq 50 \%$

\*\*When mounted on ceramic substrate of  $16 \text{ cm}^2 \times 0.7 \text{ mm}$

**ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ \text{C}$ )**







CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	$I_{CBO}$			100	nA	$V_{CB} = 60 \text{ V}$ , $I_E = 0$
Emitter Cutoff Current	$I_{EBO}$			100	nA	$V_{EB} = 5.0 \text{ V}$ , $I_C = 0$
DC Current Gain	$h_{FE1}$	90	200	400		$V_{CE} = 1.0 \text{ V}$ , $I_C = 100 \text{ mA}$ ***
DC Current Gain	$h_{FE2}$	50	150			$V_{CE} = 1.0 \text{ V}$ , $I_C = 500 \text{ mA}$ ***
Collector Saturation Voltage	$V_{CE(sat)}$		0.12	0.40	V	$I_C = 500 \text{ mA}$ , $I_B = 50 \text{ mA}$ ***
Base Saturation Voltage	$V_{BE(sat)}$		0.9	1.2	V	$I_C = 500 \text{ mA}$ , $I_B = 50 \text{ mA}$ ***
Base to Emitter Voltage	$V_{BE}$	600	635	700	mV	$V_{CE} = 6.0 \text{ V}$ , $I_C = 10 \text{ mA}$ ***
Gain Bandwidth Product	$f_T$		110		MHz	$V_{CE} = 6.0 \text{ V}$ , $I_E = -10 \text{ mA}$
Output Capacitance	$C_{ob}$		13		pF	$V_{CB} = 6.0 \text{ V}$ , $I_E = 0$ , $f = 1.0 \text{ MHz}$

\*\*\*Pulsed: PW  $\leq 350 \mu\text{s}$ , duty cycle  $\leq 2 \%$


$h_{FE}$  Classification

MARKING	LM	LL	LK
$h_{FE1}$	90 - 180	135 - 270	200 - 400


TYPICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )

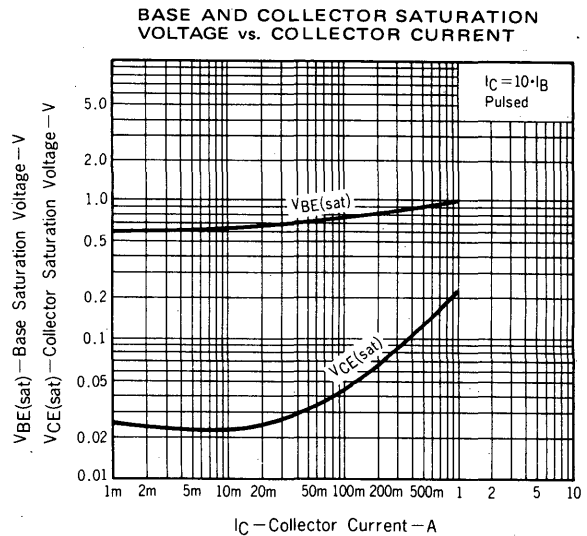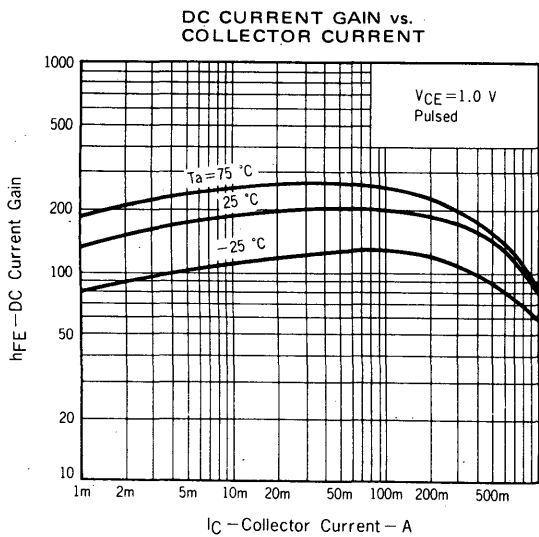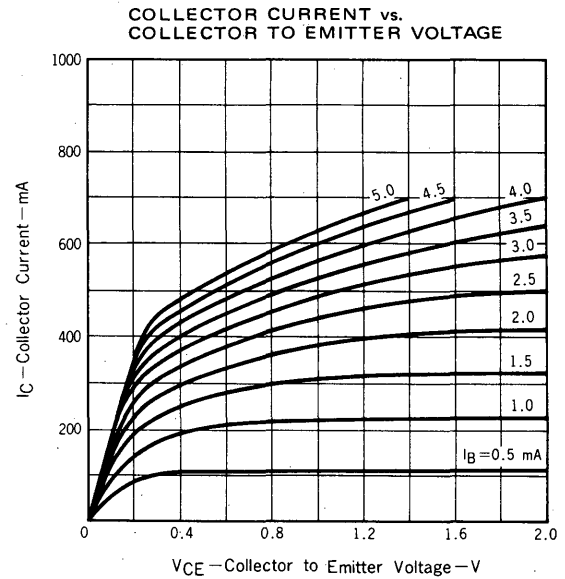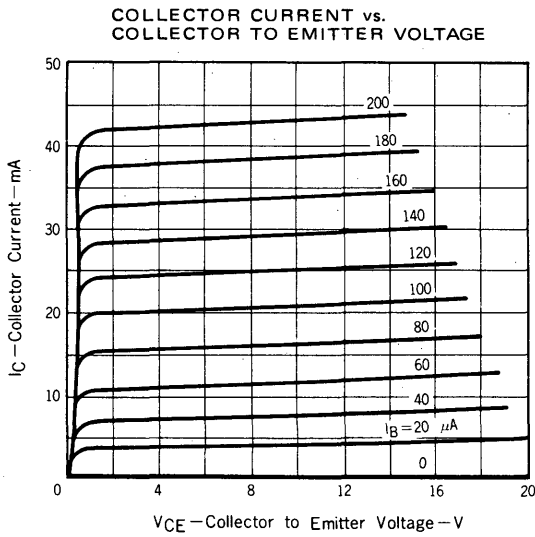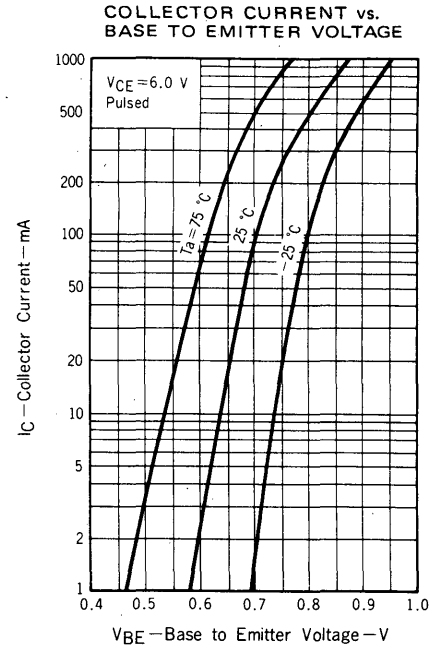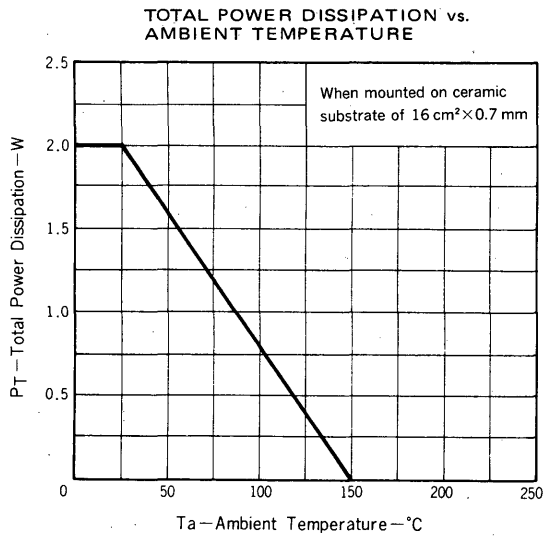

GAIN BANDWIDTH PRODUCT vs. EMITTER CURRENT

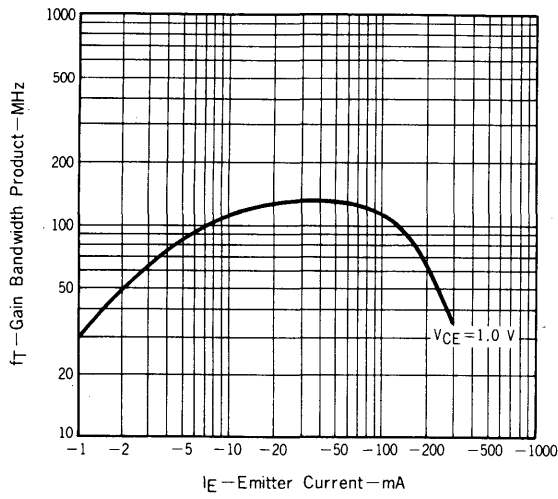

OUTPUT CAPACITANCE vs. REVERSE VOLTAGE

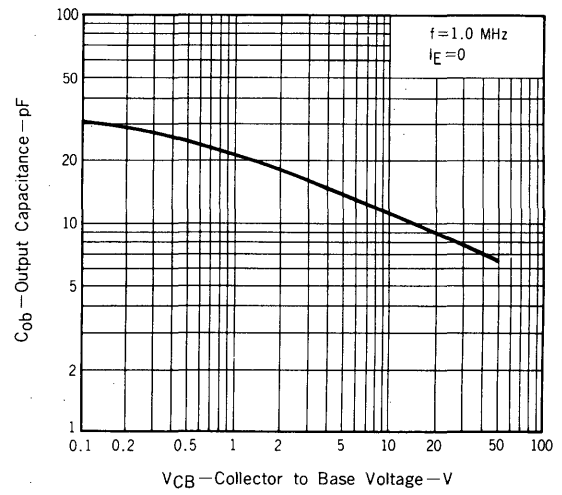

REFERENCE

Document Name	Document No.
NEC semiconductor device reliability/quality control system.	TEI-1202
Quality grade on NEC semiconductor devices.	IEI-1209
Semiconductor device mounting technology manual.	IEI-1207
Semiconductor device package manual.	IEI-1213
Guide to quality assurance for semiconductor devices.	MEI-1202
Semiconductor selection guide.	MF-1134

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

The devices listed in this document are not suitable for use in aerospace equipment, submarine cables, nuclear reactor control systems and life support systems. If customers intend to use NEC devices for above applications or they intend to use "Standard" quality grade NEC devices for applications not intended by NEC, please contact our sales people in advance.

Application examples recommended by NEC Corporation

Standard: Computer, Office equipment, Communication equipment, Test and Measurement equipment, Machine tools, Industrial robots, Audio and Visual equipment, Other consumer products, etc.

Special: Automotive and Transportation equipment, Traffic control systems, Antidisaster systems, Anticrime systems, etc.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.