

**Description**

- RF amplifier

**Features**


- High current transition frequency  
 $f_T=550\text{MHz(Typ.)}$ , [ $V_{CE}=6\text{V}$ ,  $I_E=-1\text{mA}$ ]
- Low output capacitance :  
 $C_{ob}=1.4\text{pF(Typ.)}$  [ $V_{CB}=6\text{V}$ ,  $I_E=0$ ]
- Low base time constant and high gain
- Excellent noise response

**Ordering Information**

Type NO.	Marking	Package Code
2SC5345SF	Z□ □ : $h_{FE}$ rank	SOT-23F

**Outline Dimensions**

**unit : mm**

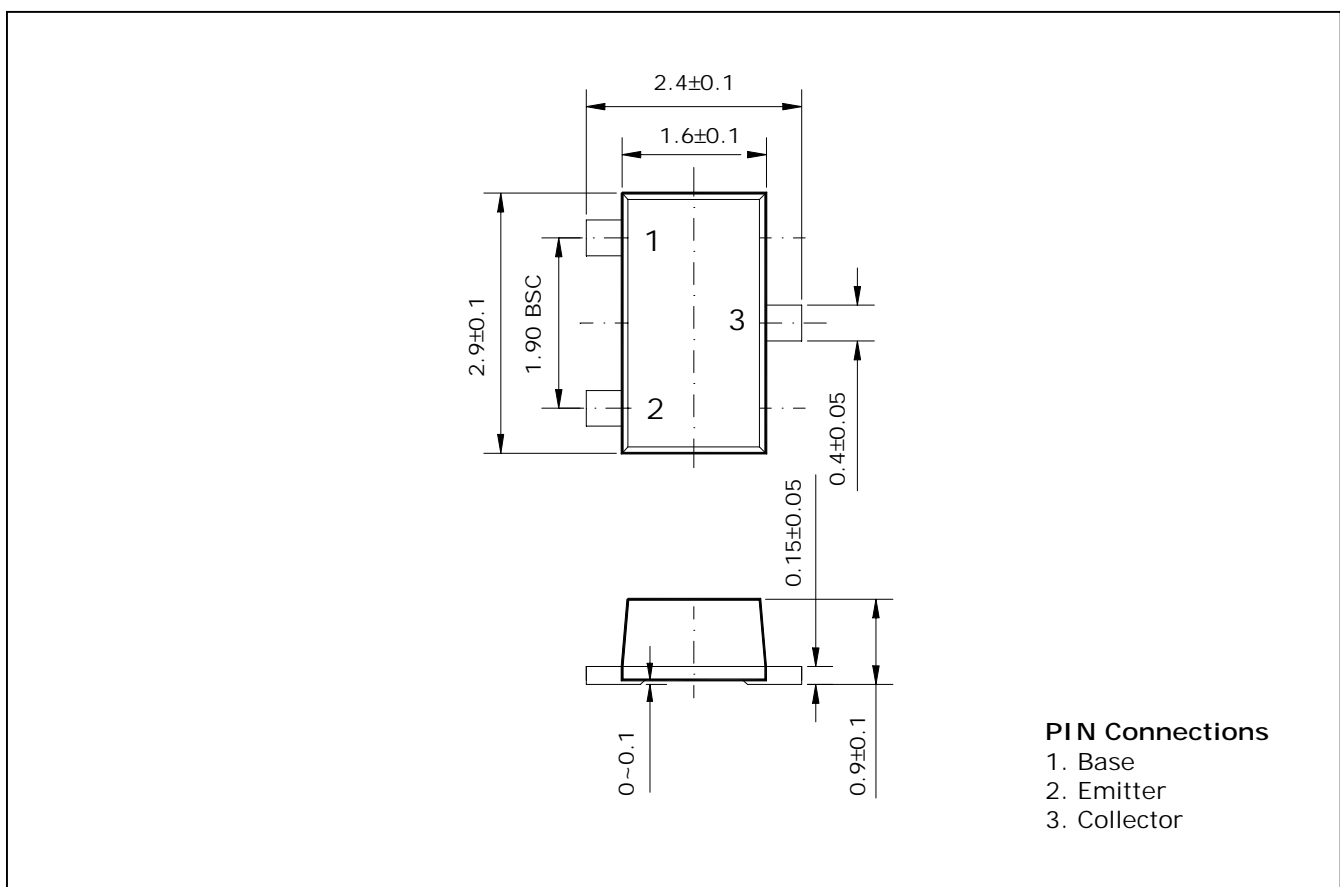

## Absolute maximum ratings

Ta=25°C

Characteristic	Symbol	Ratings	Unit
Collector-Base voltage	$V_{CBO}$	30	V
Collector-Emitter voltage	$V_{CEO}$	20	V
Emitter-Base voltage	$V_{EBO}$	4	V
Collector current	$I_C$	20	mA
Collector dissipation	$P_C$	150	mW
Junction temperature	$T_J$	150	°C
Storage temperature range	$T_{stg}$	-55 ~ 150	°C

## Electrical Characteristics

Ta=25°C

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base breakdown voltage	$BV_{CBO}$	$I_C=10\mu A, I_E=0$	30	-	-	V
Collector-Emitter breakdown voltage	$BV_{CEO}$	$I_C=5mA, I_B=0$	20	-	-	V
Emitter-Base breakdown voltage	$BV_{EBO}$	$I_E=10\mu A, I_C=0$	4	-	-	V
Collector cut-off current	$I_{CBO}$	$V_{CB}=30V, I_E=0$	-	-	0.5	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB}=4V, I_C=0$	-	-	0.5	$\mu A$
DC current gain	$h_{FE}^*$	$V_{CE}=6V, I_C=1mA$	40	-	240	-
Collector-Emitter saturation voltage	$V_{CE(sat)}$	$I_C=10mA, I_B=1mA$	-	-	0.3	V
Transistor frequency	$f_T$	$V_{CE}=6V, I_E=-1mA$	-	550	-	MHz
Collector output capacitance	$C_{ob}$	$V_{CB}=6V, I_E=0, f=1MHz$	-	1.4	-	pF

\* :  $h_{FE}$  rank / R : 40~80, O : 70~140, Y : 120~240

Electrical Characteristic Curves

Fig. 1  $P_C$ - $T_a$

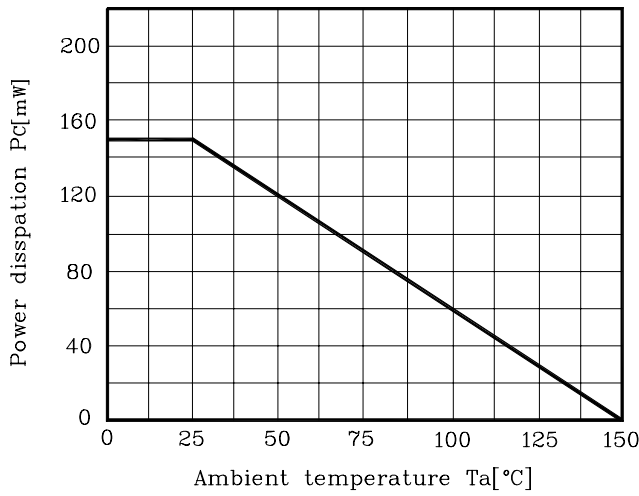


Fig. 2  $I_C$ - $V_{CE}$

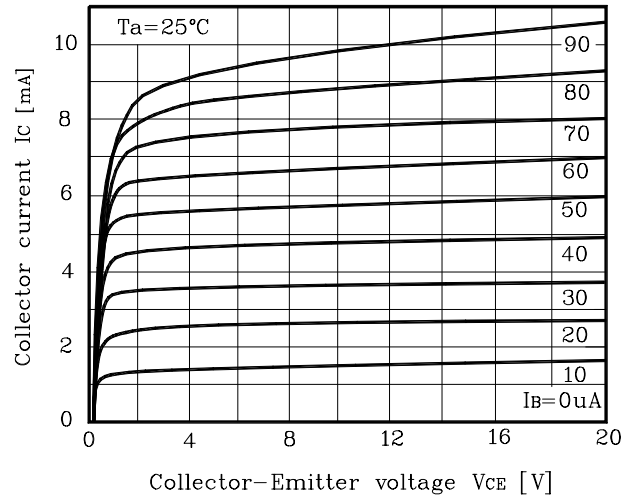


Fig. 3  $h_{FE}$ - $I_C$

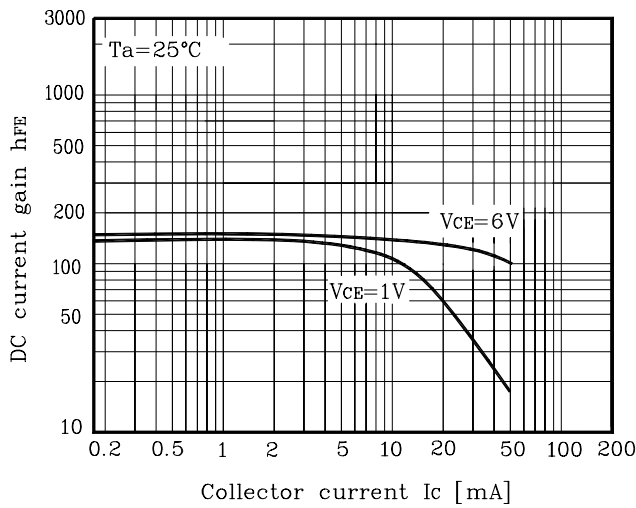


Fig. 4  $f_T$ - $I_E$

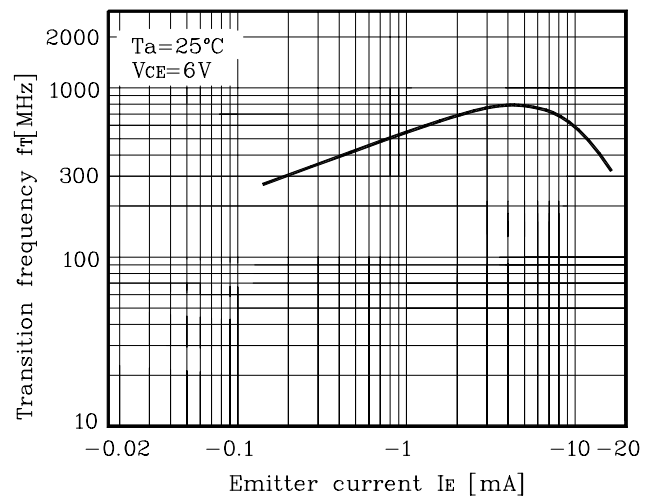


Fig. 5  $C_{ob}$ - $V_{CB}$ ,  $C_{ib}$ - $V_{EB}$


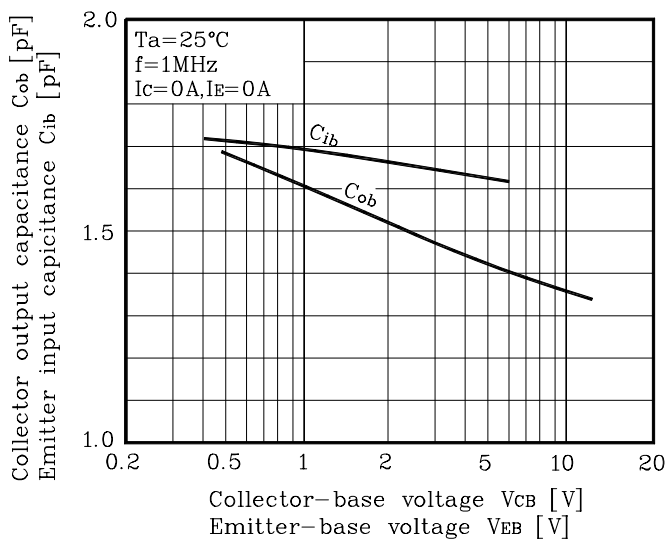


Fig. 6  $Y_{ie}$ - $I_C$

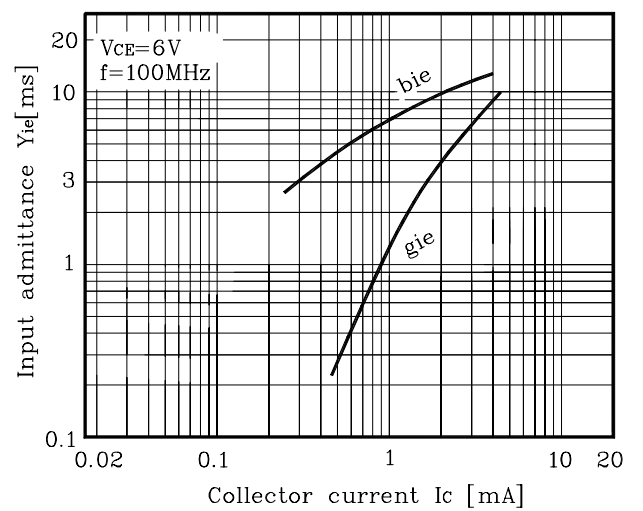

Electrical Characteristic Curves

Fig. 7  $I_C$ - $Y_{oe}$

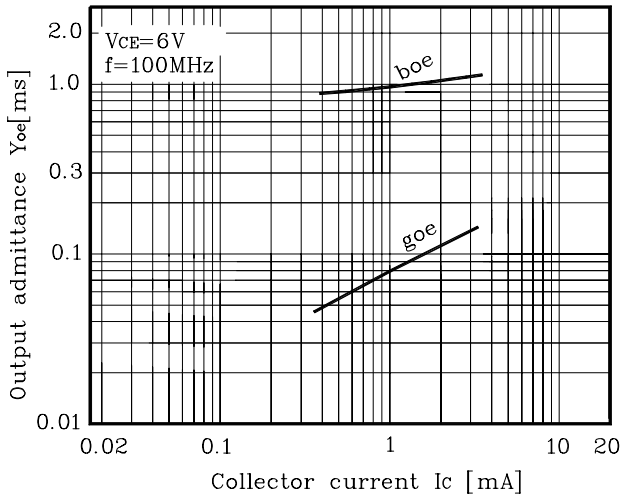


Fig. 8  $I_C$ - $Y_{fe}$


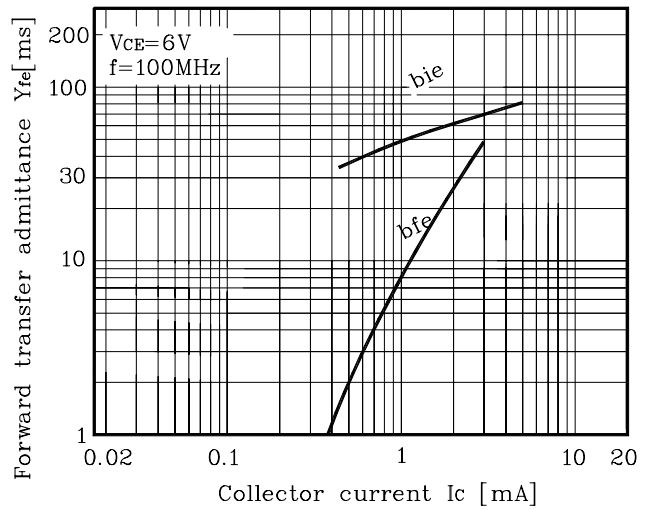


Fig. 9  $I_C$ - $Y_{re}$



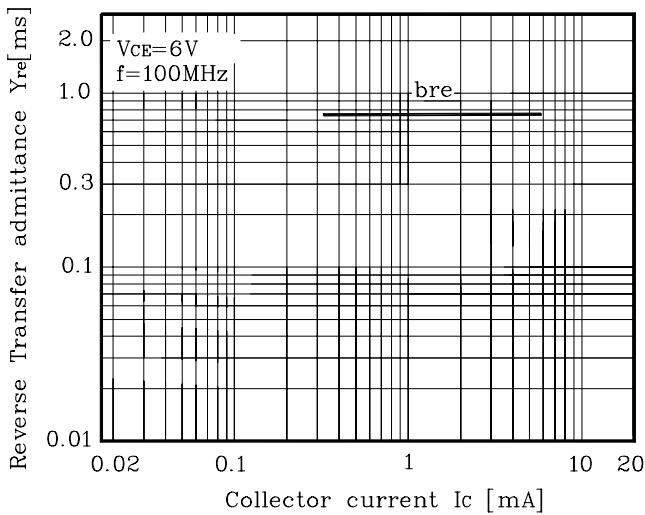

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.