NEC

SILICON TRANSISTORS
2SA1221, 1222

PNP SILICON EPITAXIAL TRANSISTOR FOR LOW-FREQUENCY POWER AMPLIFIERS

FEATURES

- Ideal for use of high withstanding voltage current such as TV vertical deflection output, audio output, and variable power supplies.
- Complementary transistor with 2SC2958 and 2SC2959
  V_{CEO} = 140 V: 2SA1221/2SC2958
  V_{CEO} = 160 V: 2SA1222/2SC2959

PACKAGE DRAWING (UNIT: mm)

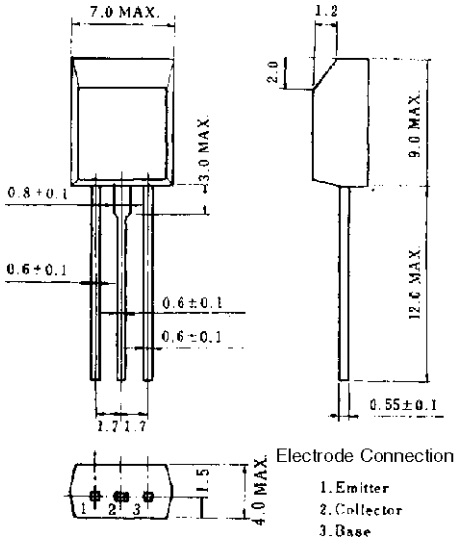

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

Parameter	Symbol	Ratings	Unit
Collector to base voltage	V_{CBO}	–160	V
Collector to emitter voltage	V_{CEO}	–140/–160	V
Emitter to base voltage	V_{EBO}	–5.0	V
Collector current (DC)	$I_{C(DC)}$	–500	mA
Collector current (pulse)	$I_{C(pulse)}$*	–1.0	A
Total power dissipation	P_T	1.0	W
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	–55 to +150	°C

* PW ≤ 10 ms, duty cycle ≤ 50%

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Collector cutoff current	I_{CBO}	V_{CB} = –100 V, I_E = 0			–200	nA
Emitter cutoff current	I_{EBO}	V_{EB} = –5.0 V, I_C = 0			–200	nA
DC current gain	h_{FE} **	V_{CE} = –2.0 V, I_C = –100 mA	100	150	400	
DC base voltage	V_{BE} **	V_{CE} = –5.0 V, I_C = –20 mA	–0.6	–0.64	–0.7	V
Collector saturation voltage	$V_{CE(sat)}$ **	I_C = –1.0 A, I_B = –0.2 A		–0.6	–0.9	V
Base saturation voltage	$V_{BE(sat)}$ **	I_C = –1.0 A, I_B = –0.2 A		–1.1	–0.3	V
Output capacitance	C_{ob}	V_{CB} = –10 V, I_E = 0, f = 1.0 MHz		24	40	pF
Gain bandwidth product	f_T	V_{CE} = –10 V, I_E = 20 mA	30	45		MHz

** Pulse test PW ≤ 350 μs, duty cycle ≤ 2% per pulsed

Document No. D16143EJ1V0DS00
Date Published April 2002 N CP(K)
Printed in Japan

h_{FE} CLASSIFICATION

Marking	M	L	K
h_{FE}	100 to 200	160 to 320	200 to 400

TYPICAL CHARACTERISTICS (Ta = 25°C)

TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE

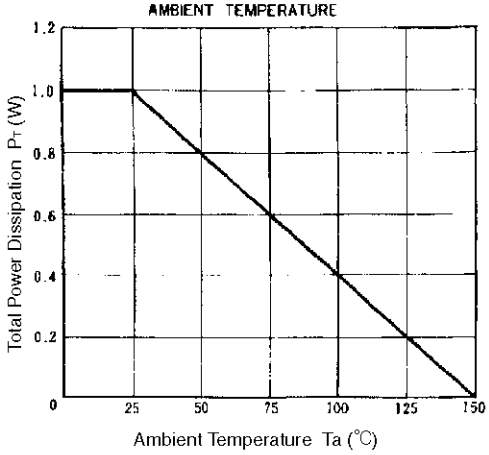

COLLECTOR CURRENT vs. BASE TO EMITTER VOLTAGE

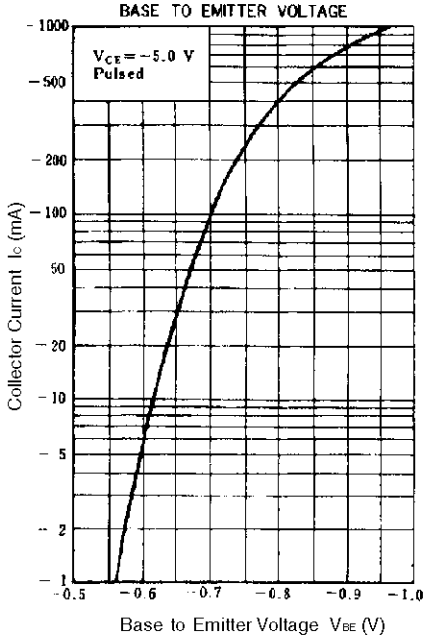

DC CURRENT GAIN vs. COLLECTOR CURRENT

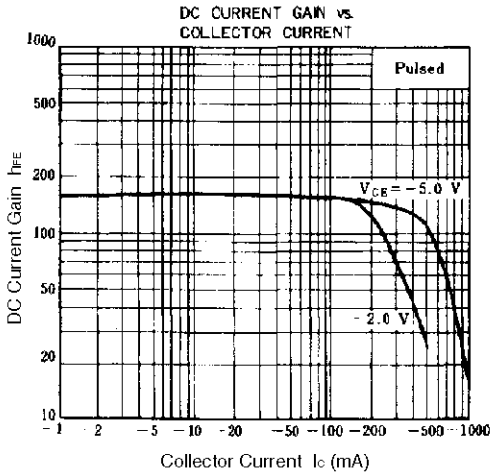

BASE AND COLLECTOR SATURATION VOLTAGE vs. COLLECTOR CURRENT

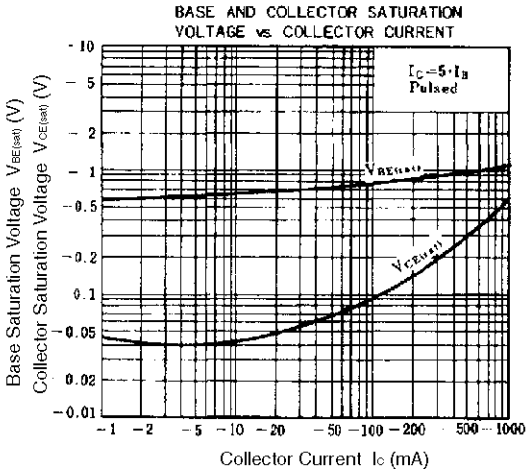

GAIN BANDWIDTH PRODUCT vs.
EMITTER CURRENT

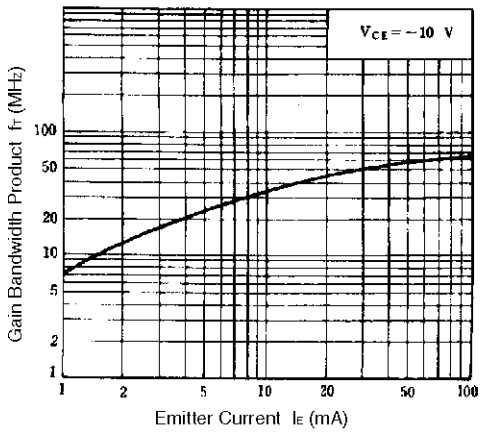

OUTPUT CAPACITANCE vs.
COLLECTOR TO BASE VOLTAGE

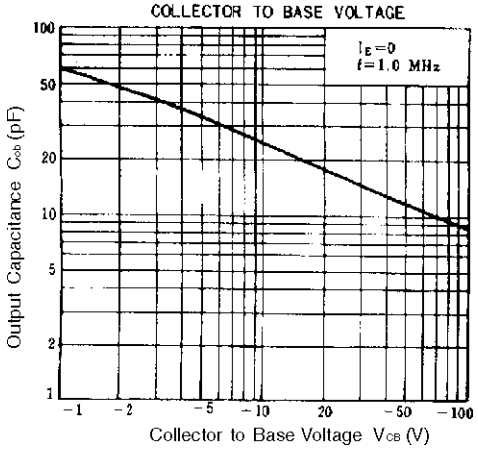

- **The information in this document is current as of July, 2001. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
  "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
  "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
  "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
  "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
  The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.
  (Note)
  (1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.
  (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4

littlediode
COMPONENTS FOR ALL

Littlediode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.