
INTRODUCTION

The KA22261 is a monolithic intergrated circuit consisting of a dual equalizer amplifier with REC AMP, and it is suitable for stereo radio cassettes.

16-DIP-300A



FEATURES

- Dual equalizer amplifier with ALC circuit.
- High open loop voltage gain : 78dB (Typ).
- Recording amplifier available because of high open loop voltage gain.
- Not necessary diode or transistor for ALC.
- Good channel separation : 60dB (Typ).
- Good ALC response balance between channels.
- Wide operating supply voltage range : V_{CC} = 6V ~ 15V.

ORDERING INFORMATION

Device	Package	Operating Temperature
KA22261	16-DIP-300A	-20℃ ~ +70℃

BLOCK DIAGRAM

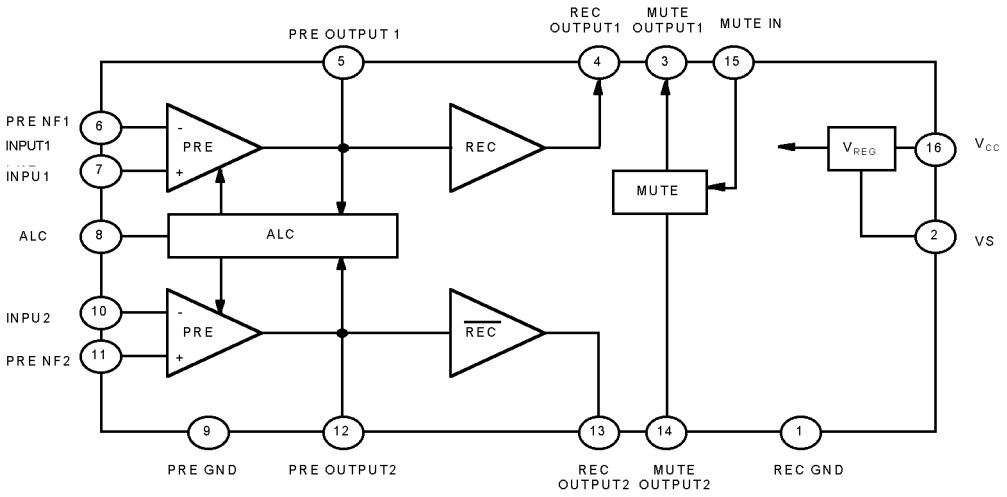


Fig 1.

(C) 1996 Samsung Electronics
Printed in Korea.

ABSOLUTE MAXIMUM RATINGS (Ta = 25℃)

Characteristics	Symbol	Value	Unit
Supply Voltage	V_{CC}	16	V
Power Dissipation	P_D	750	W
Operating Temperature	T_{OPR}	-20 ~ +70	℃
Storage Temperature	T_{STG}	-40 ~ +150	℃

ELECTRICAL CHARACTERISTICS

(Ta = 25℃, V_{CC} = 9V, f = 1KHz, unless otherwise specified)

Characteristics		Symbol	Test Condition	Min	Typ	Max	Unit
Quiescent Circuit Current		I_{CCQ}	V_I = 0		8.5	10.5	mA
PRE AMP	Open Loop Voltage Gain	G_{VO}	V_I = -80dbm	65	78		dB
	Output Voltage	V_{O1}	THD = 1%	0.5	0.8		V
	Total Harmonic Distortion	THD_1	V_O = 0.2V		0.15	0.5	%
	Output Noise Voltage	V_{NO}	R_G = 2.2KΩ, NAB BW(-3dB) = 30Ha ~ 20KHz		0.26	0.6	mW
	Cross Talk	CT	R_G = 2.2KΩ	47	60		dB
REC AMP	Closed Loop Voltage Gain	G_{VC}	R_L = 10KΩ	12.7	14.7	16.7	dB
	Output Voltage	V_{O2}	THD = 1%	2.0	2.5		V
	Total Harmonic Distortion	THD_2	V_O = 1.5V		0.3	1.0	%
	ALC Range (Note 1)	$\triangle V_{ALC}$	V_I = -60dB, R_G = 2.2KΩ		45		dB
	ALC Distortion	THD_{ALC}	V_I = -20dBm,R_G = 2.2KΩ		0.3	1.0	V
	ALC Voltage	$VO_{(ALC)}$	V_I= -20dBm, R_G = 2.2KΩ	0.9	1.1	1.42	%
Muting Attenuation		ATT_{MUTE}		45	55		dB
ALC Balance		CB_{ALC}	V_I = -20dBm		0	2	dB

*Note 1 : Input voltage range from V_I = -60dB to output voltage V_O = 3dB up.

(C) 1996 Samsung Electronics
Printed in Korea.

TEST CIRCUIT

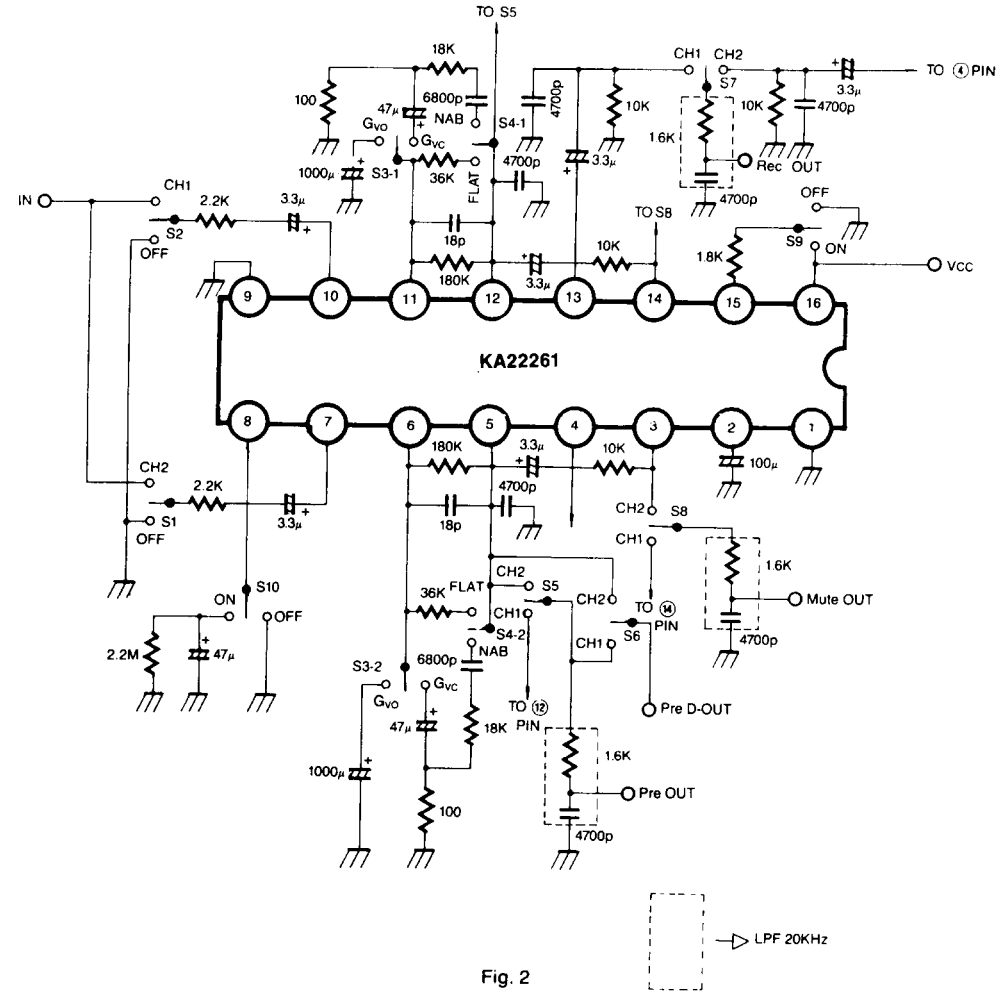


Fig. 2

(C) 1996 Samsung Electronics
Printed in Korea.

APPLICATION CIRCUIT


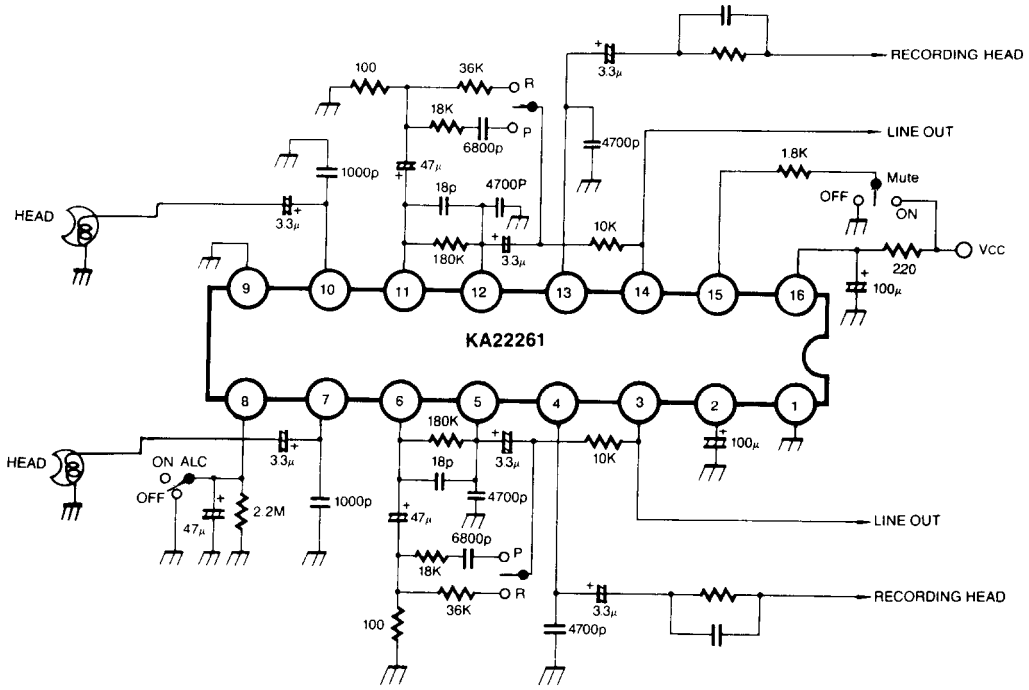


Fig. 3


(C) 1996 Samsung Electronics
Printed in Korea.

Dimensions in Milimeters

16-DIP-300A

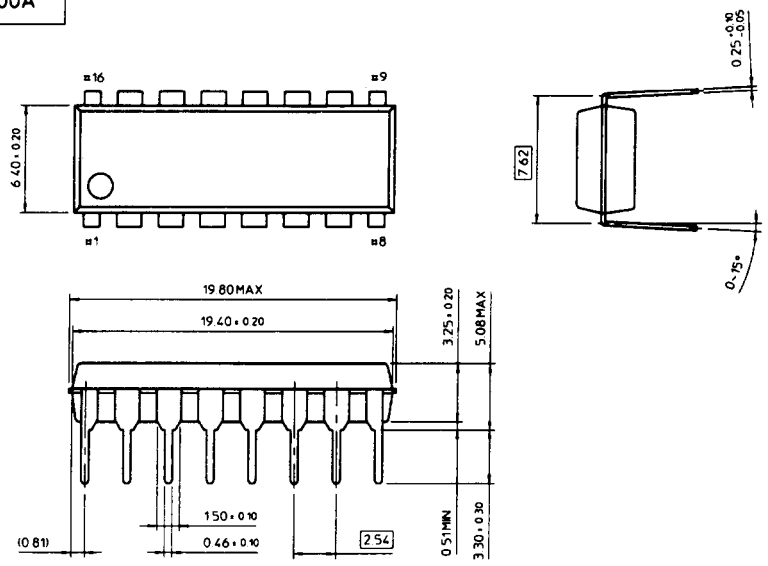

22-SDIP-300

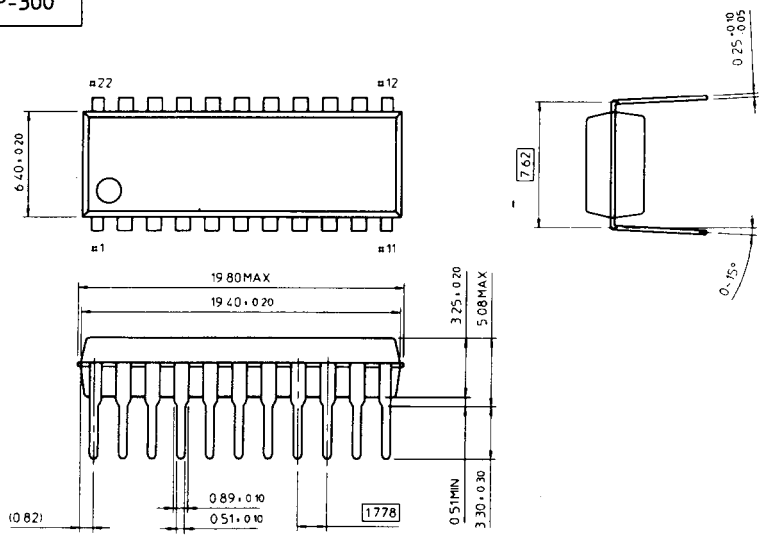

(C) 1996 Samsung Electronics
Printed in Korea.

littlediode
COMPONENTS FOR ALL

Littlediode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.