


The KA2206B is a monolithic integrated circuit consisting of a 2-channel power amplifier. It is suitable for stereo and bridge amplifier application of radio cassette tape recorders.

**FEATURES**

- High output power  
Stereo :  $P_O = 2.3W$  (Typ) at  $V_{CC} = 9V, R_L = 4\Omega$ .  
Bridge :  $P_O = 4.7W$  (Typ) at  $V_{CC} = 9V, R_L = 8\Omega$ .
- Low switching distortion at high frequency.
- Small shock noise at the time of power on/off due to a built-in muting circuit
- Good ripple rejection due to a built-in ripple filter.
- Good channel separation.
- Soft tone at the time of output saturation.
- Closed loop voltage gain fixed 45dB (Bridge : 51dB) but availability with external resistor added.
- Minimum number of external parts required.
- Easy to design radiator fin.

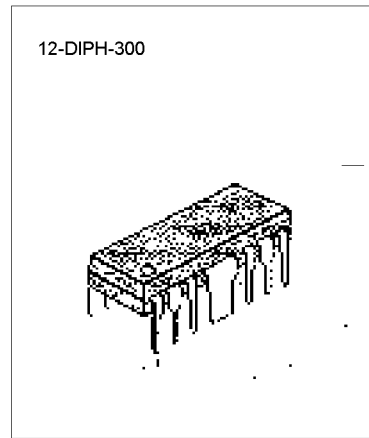

**ORDERING INFORMATION**

Device	Package	Operating Temperature
KS2206B	12-DIPH-300	-20°C ~ +70°C
KS22069BN	16-DIP-300A	

**BLOCK DIAGRAM**

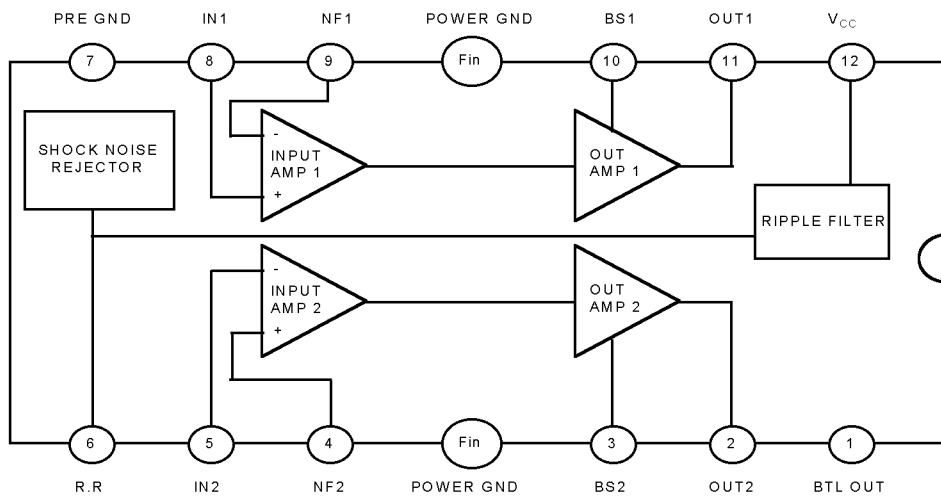


Fig. 1

**ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)**

Characteristics	Symbol	Value	Unit
Supply Voltage	V <sub>CC</sub>	15	V
Power Dissipation	P <sub>D</sub>	4*	W
Operating Temperature	T <sub>OPR</sub>	-20 ~ +70	°C
Storage Temperature	T <sub>STG</sub>	-40 ~ +150	°C

\* Fin is soldering on the PCB


**ELECTRICAL CHARACTERISTICS**

(Ta = 25°C, V<sub>CC</sub> = 9V, f = 1KHz R<sub>G</sub> = 600Ω, unless otherwise specified)

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit	
Operating Supply Voltage	V <sub>CC</sub>			9	11	V	
Quiescent Circuit Current	I <sub>CCQ</sub>	V <sub>i</sub> = 0, Stereo		40	55	mA	
Closed Loop Voltage Gain	GVC	Stereo	V <sub>i</sub> = -45dBm	43	45	47	dB
		Bridge		49	51	53	dB
Channel Balance	CB	Stereo	-1	0	+1	dB	
Output Power	P <sub>O</sub>	Stereo	R <sub>L</sub> = 4Ω, THD = 10%,	1.7	2.3		W
			R <sub>L</sub> = 8Ω, THD = 10%,		1.3		W
		Bridge	R <sub>L</sub> = 8Ω, THD = 10%,		4.7		W
Total Harmonic Distortion	THD	Stereo	R <sub>O</sub> = 250mW, R <sub>L</sub> = 4Ω		0.3	1.5	%
		Bridge			0.5		%
Input Resistance	R <sub>I</sub>		21	30		KΩ	
Ripple Rejection Ratio	RR	Stereo, R <sub>G</sub> = 0Ω, V <sub>i</sub> = 150mW f = 100Hz	40	46		dB	
Output Noise Voltage	V <sub>NO</sub>	Stereo, R <sub>G</sub> = 0Ω		0.3	1.0	mW	
		Stereo, R <sub>G</sub> = 10KΩ		0.5	2.0	mV	
Cross Talk	CT	Stereo, R <sub>G</sub> = 10KΩ, V <sub>O</sub> = 0dBm	40	55		dB	

**APPLICATION INFORMATION**

**1. Stereo application**

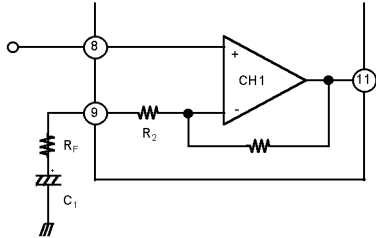


i) Fixed voltage gain  
(Pin 9 connected to GND directly)

$$G_V = 20 \log \frac{R_1}{R_2} \text{ (dB)}$$

ii) Variable voltage gain  
(Rf and C1 connected with pin 9)

$$G_V = 20 \log \frac{R_1}{R_2 + R_F} \text{ (dB)}$$

**2. Bridge application**

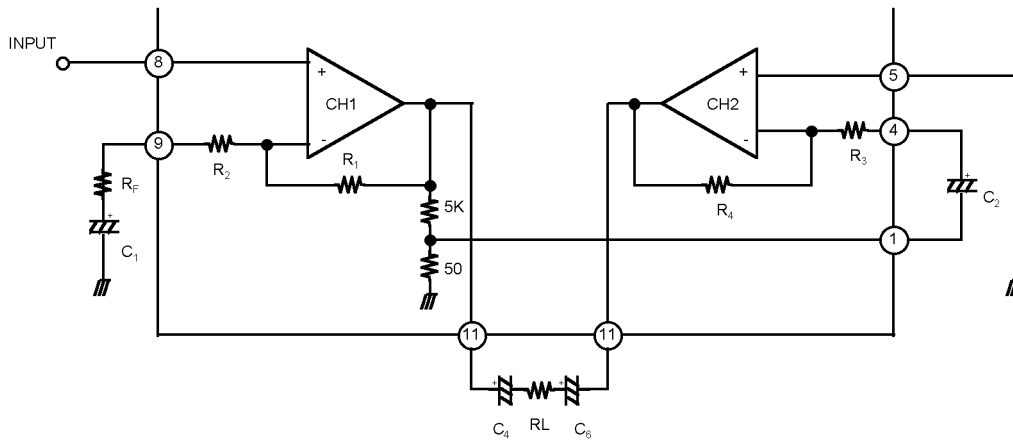

i) Fixed voltage gain (Pin 9 connected to GND directly)

$$G_V = 20 \log \frac{R_1}{R_2} + 6 \text{ (dB)}$$

ii) Variable voltage gain Rf and C1 connected with pin 9)

$$G_V = 20 \log \frac{R_1}{R_2 + R_F} + 6 \text{ (dB)}$$

APPLICATION CIRCUIT

1. Stereo Amplifier

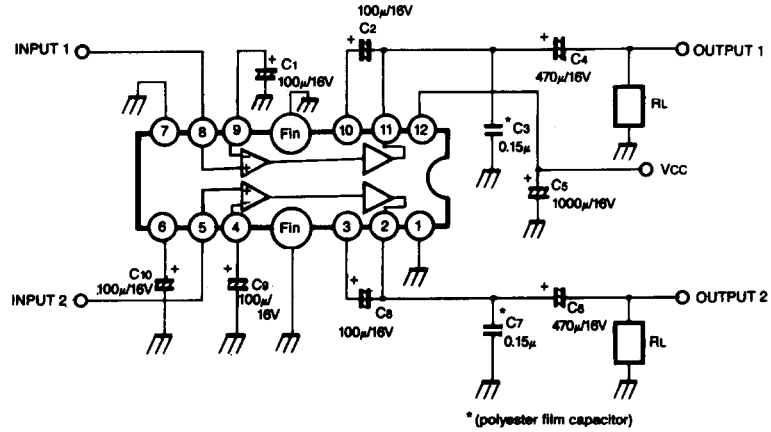


Fig. 2

2. Bridge Amplifier


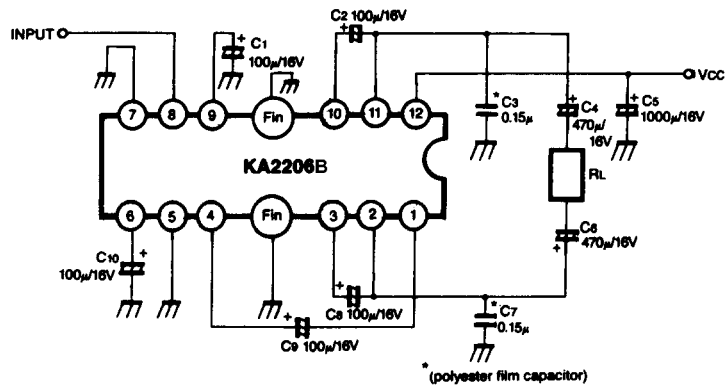


Fig. 3

Dimensions in Millimeters



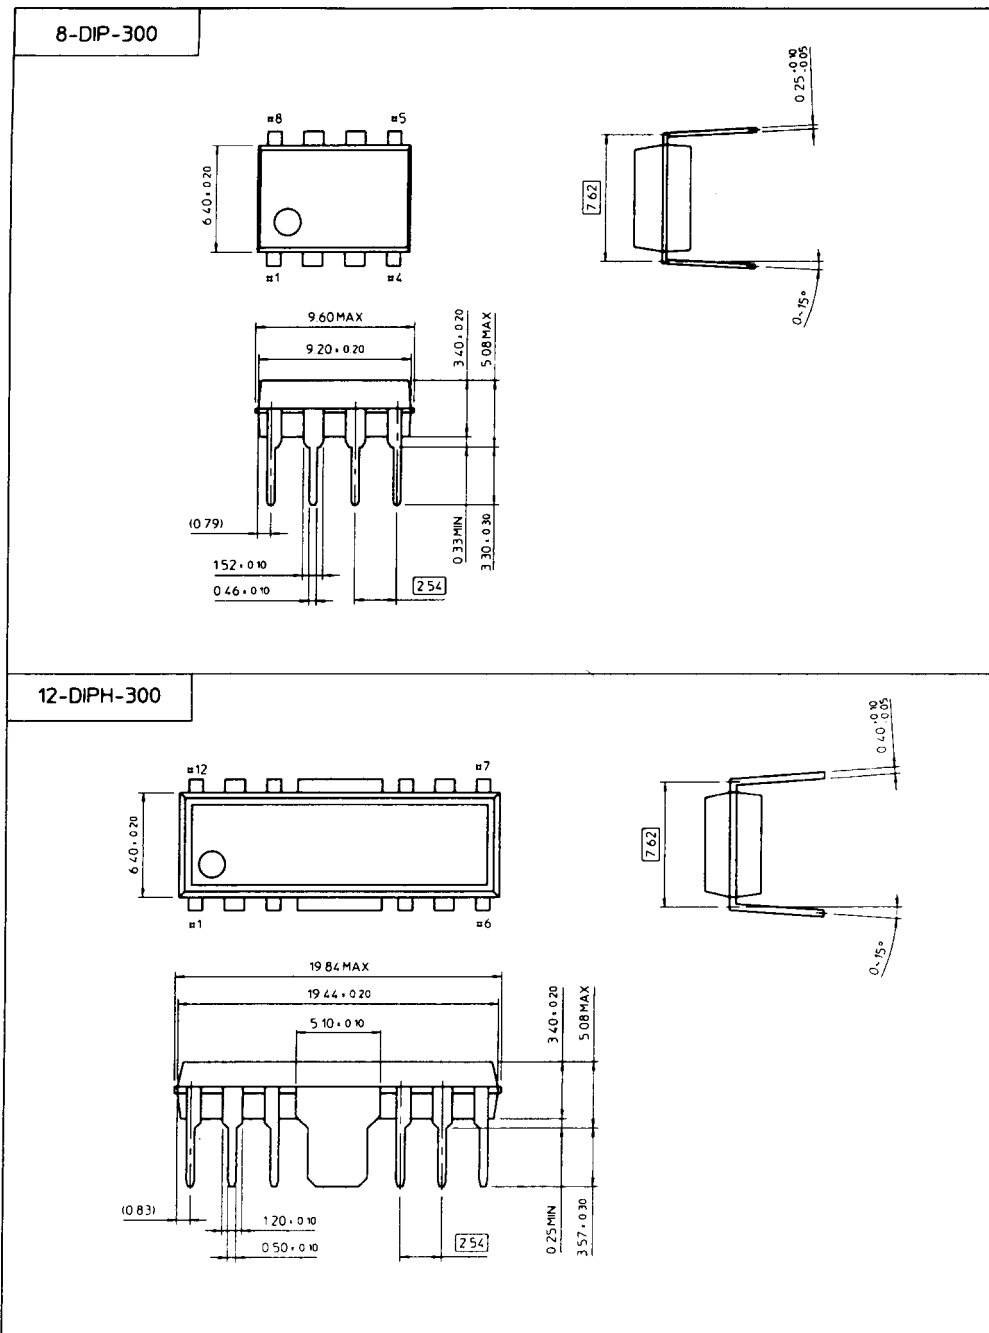

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.