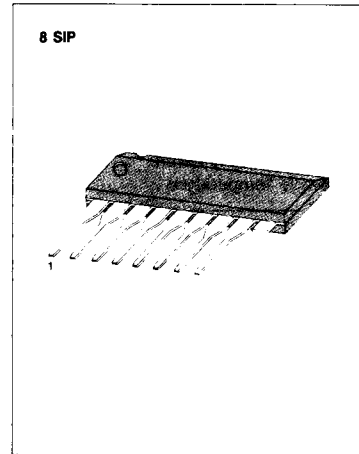


**DUAL LOW NOISE EQUALIZER AMPLIFIER**

The KA2221 is a monolithic integrated circuit consisting of 2-channel low noise amplifiers and regulated power supply for car stereos.

**FEATURES**

- Suitable for car stereos.
- Low noise amplifier.
- Voltage regulator included.
- Good ripple rejection.
- High channel separation (65dB Typ).
- Minimum number of external parts required.

**ORDERING INFORMATION**

Device	Package	Operating Temperature
KA2221	8 SIP	-20°C ~ +70°C

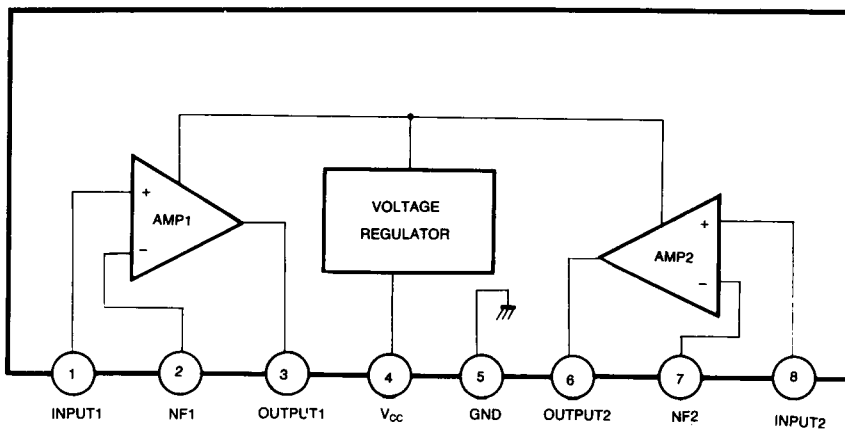
**BLOCK DIAGRAM**

Fig. 1

ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

Characteristic	Symbol	Value	Unit
Supply Voltage	$V_{CC}$	18	V
Power Dissipation	$P_D$	200	mW
Operating Temperature	$T_{OPR}$	$-20 \sim +70$	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	$-40 \sim +125$	$^\circ\text{C}$

## ELECTRICAL CHARACTERISTICS

( $T_a = 25^\circ\text{C}$ ,  $V_{CC} = 12\text{V}$ ,  $R_L = 10\text{K}\Omega$ ,  $f = 1\text{KHz}$ , NAB, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Quiescent Circuit Current	$I_{CCQ}$	$V_I = 0$		6.0	9.0	mA
Open Loop Voltage Gain	$G_{VO}$		65	80		dB
Closed Loop Voltage Gain	$G_{VC}$	$V_O = 0.5\text{V}$	33	35	37	dB
Output Voltage	$V_O$	THD=1%	0.6	1.0		V
Total Harmonic Distortion	THD	$V_O = 0.5\text{V}$		0.1	0.3	%
Input Resistance	$R_i$			150		$\text{K}\Omega$
Equivalent Input Noise Voltage	$V_{NI}$	$R_G = 2.2\text{K}\Omega$ $\text{BW} (-3\text{dB}) = 15\text{Hz} \sim 30\text{KHz}$		1.0	2.0	$\mu\text{V}$
Cross Talk	CT	$R_G = 2.2\text{K}\Omega$	50	65		dB

## TEST CIRCUIT



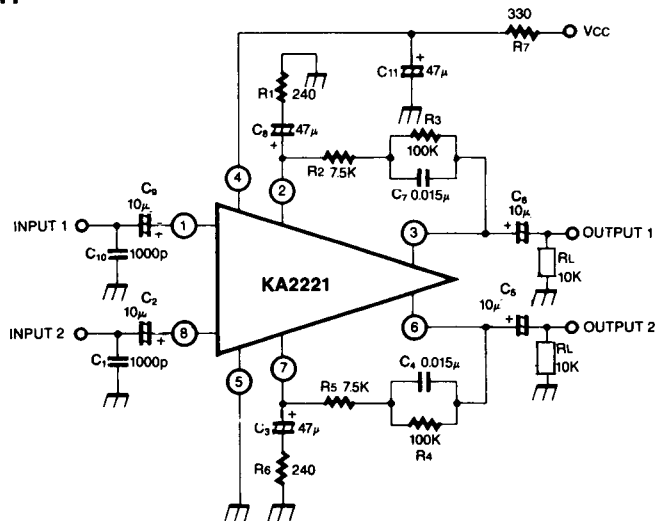


Fig. 2


FREQUENCY RESPONSE

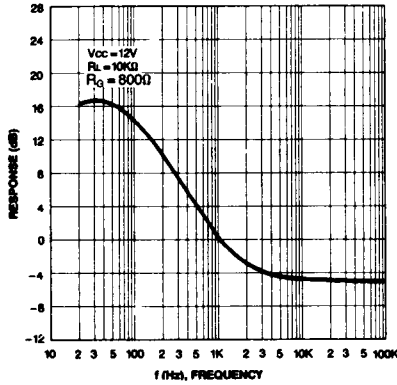


OUTPUT VOLTAGE-INPUT VOLTAGE

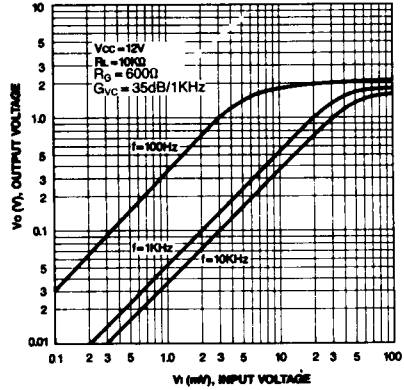


CROSS TALK-FREQUENCY

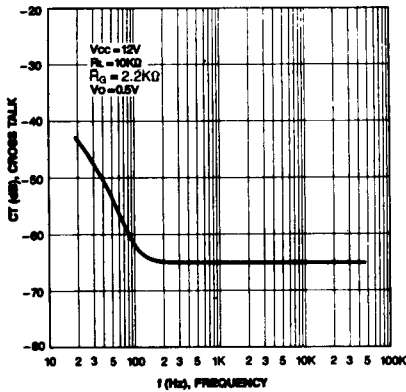


OUTPUT VOLTAGE-SUPPLY VOLTAGE

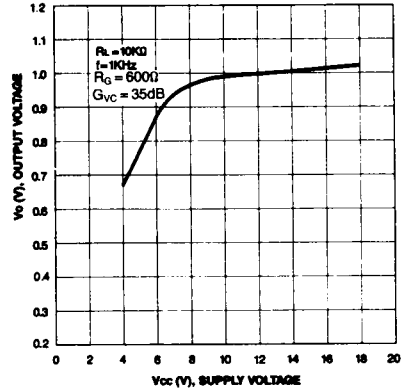

TOTAL HARMONIC DISTORTION-OUTPUT VOLTAGE

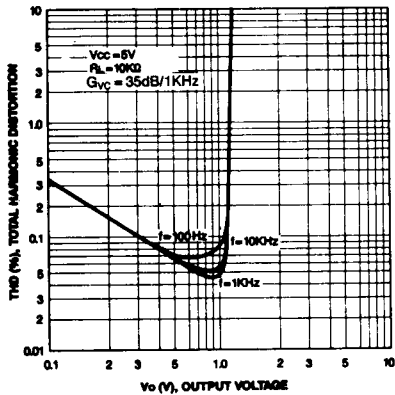

QUIESCENT CIRCUIT CURRENT-SUPPLY VOLTAGE

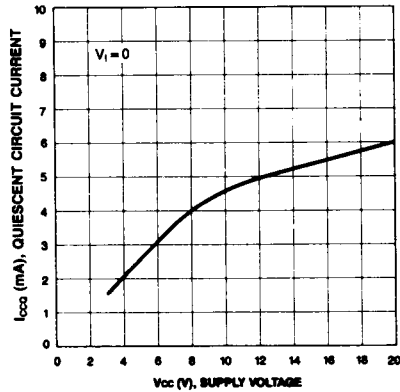

## APPLICATION INFORMATION

## External Components (Refer to test circuits)

$C_1$  ( $C_{10}$ ): Noise filter

These capacitors prevent radio interference in strong electric fields. The recommended value is 1000pF.

$C_2$  ( $C_9$ ): Input coupling capacitor

The recommended value is 10 $\mu$ F. If made too small, the low frequency characteristics will change for the worse, but too large a value will increase the rising time when power is applied.

$C_3$  ( $C_8$ ): Negative feedback capacitor

The lower cut-off frequency depends on the value of these capacitors and is determined as follows:

$$C_3 (C_8) = \frac{1}{2\pi f_L \cdot R_1 (R_6)}$$

$f_L$ : Low cut-off frequency

If the value of these capacitors is made larger, the starting time of amplifier is delayed further.

$C_5$  ( $C_6$ ): Output coupling capacitor

The recommended value is 10 $\mu$ F.


$R_2, R_3, C_7$  ( $R_4, R_5, C_4$ ): Equalizer network

The time constants of standard NAB characteristic are follow.

Tape speed	9.5cm/sec	4.75cm/sec
$C_7$ ( $R_2 + R_3$ )	3180 $\mu$ sec	1590 $\mu$ sec
$R_2, C_7$	90 $\mu$ sec	120 $\mu$ sec

$R_1$  ( $R_6$ ): Feedback component

The closed loop gain is determined approximately by the following relationship.



$$G_{VC} = 20 \log \frac{Z + R_1}{R_1} \quad (\text{dB})$$

$$Z = R_2 + R_3 // C_7$$

\* Choose  $R_2, R_3$ , (DC resistance of NAB element) as 100K $\Omega$  approximately.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.