


4.6W DUAL POWER AMP

The KA22065 is a monolithic integrated circuit consisting of a 2-channel power amplifier with power on/off (stand-by switch) function. It is suitable for portable radio cassette recorders.

FEATURES

- 2-channel amplifier: $4.6W \times 2$ (typ.)
- Low quiescent circuit current: $I_{cc} = 21mA$ (typ.)
- High output ($P_o = 4.6W$, $V_{cc} = 12V/8W$)
- Small pop noise at power on
- Minimum external parts required
- Supply voltage: 6 V to 15 V
- Includes the thermal protection circuit
- Connect H/S to GND

12-SIPH-B



ORDERING INFORMATION

Device	Package	Operating Temperature
KA22065	12-SIPH-B	-20~+70°C

BLOCK DIAGRAM

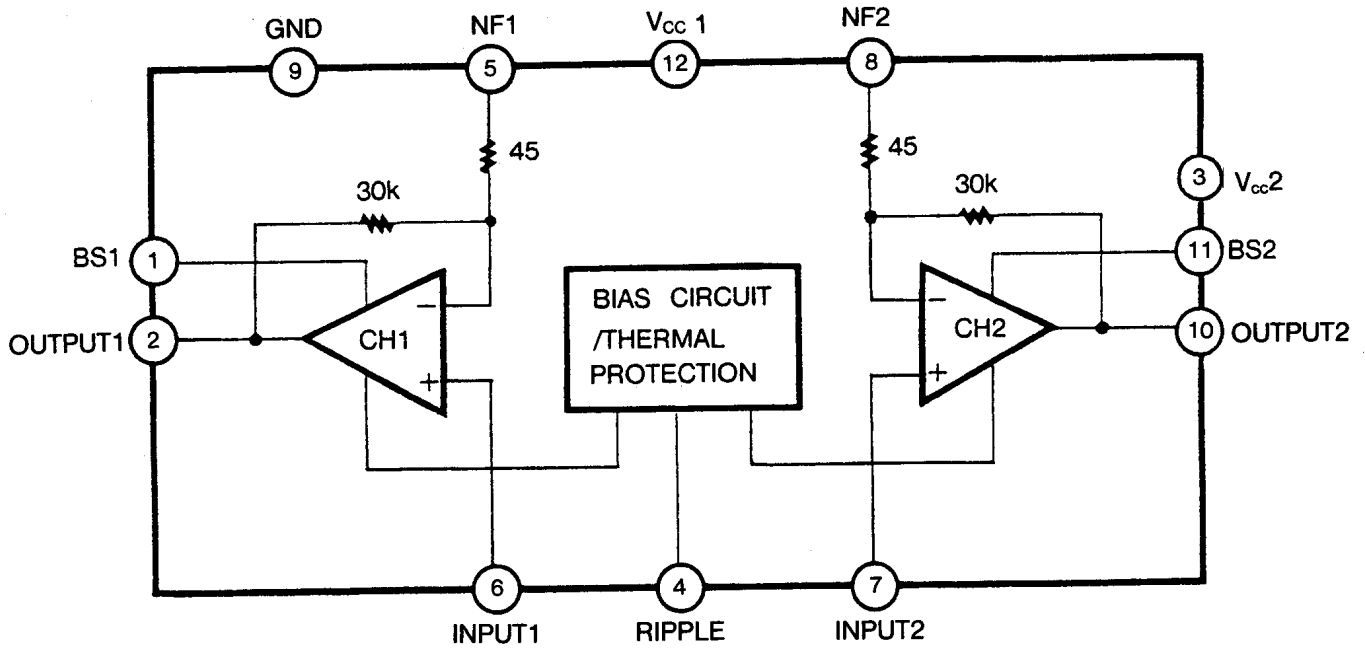


Fig. 1.

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Characteristic	Symbol	Value	Unit
Supply Voltage	V _{CC}	20	V
Output Current (Channel)	I _o (peak)	2.5	A
Power Dissipation	P _d	12.5	W
Operating Temperature	T _{opr}	-20~+70	°C
Storage Temperature	T _{stg}	-40~+150	°C

ELECTRICAL CHARACTERISTICS(Ta=25°C, V_{CC}=9V, R_L=4Ω, f=KHz, R_g=600Ω, unless otherwise specified)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Quiescent Circuit Current	I _{CC}	V _i =0		21	45	mA
Output Power	P _{O1}	THD=10%	2.0	2.5		W
	P _{O2}	THD=10%, V _{CC} =12V	4.0	4.6		W
Total Harmonic Distortion	THD	P _O =1W/CH		0.2	0.9	%
Voltage Gain (Closed Loop)	AV ₁	R _f =120Ω, V _O =0.775V	43	45	47	dB
	AV ₂	R _f =0Ω, V _O =0.775V	54.5	56.5	58.5	dB
Input Resistance	R _i		24	30	36	KΩ
Output Noise Voltage	V _{NO}	R _g =10KΩ, BW=20Hz-20KHz		0.3	1.0	mV
Ripple Rejection Ratio	R R	R _g =600Ω, f=120Hz	44	52		dB
Cross Talk	C.T	R _g =10KΩ, V _O =0dBm, f=1KHz	40	50		dB
Input Offset Voltage	V ₅ ,V ₇			30	60	mV
Stand By Current	I _{sb}	SW1 Off		1	20	μA

TEST AND APPLICATION CIRCUIT

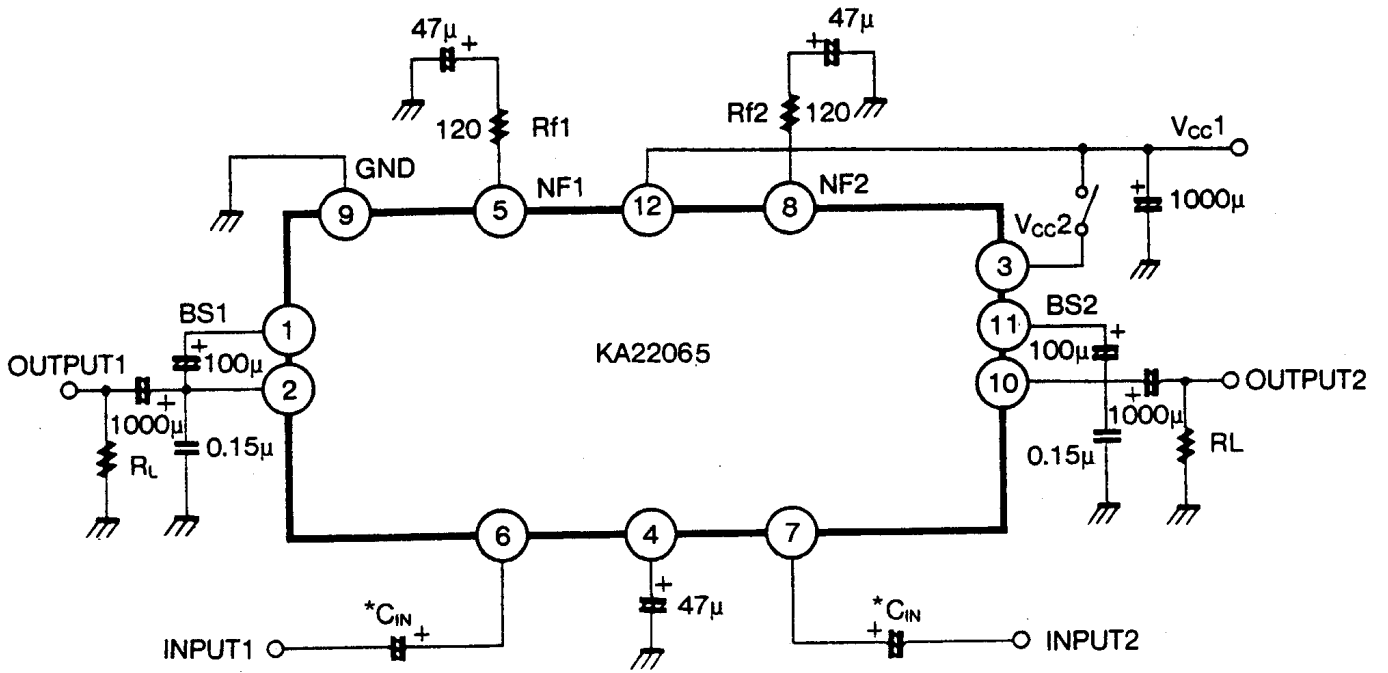


Fig. 2.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.