

NPN POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/277

Devices

2N2150

2N2151

Qualified Level

JANTX


MAXIMUM RATINGS ($T_C = 25^{\circ}\text{C}$ unless otherwise noted)

Ratings	Symbol	Value	Units
Collector-Emitter Voltage	V_{CEO}	100	Vdc
Collector-Base Voltage	V_{CBO}	150	Vdc
Emitter-Base Voltage	V_{EBO}	8.0	Vdc
Base Current	I_B	2.0	Adc
Collector Current	I_C	2.0	Adc
Total Power Dissipation @ $T_C = +100^{\circ}\text{C}^{(1)}$	P_T	30	W
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	3.3	$^{\circ}\text{C}/\text{W}$

1) Derate linearly @ 0.3 W/ $^{\circ}\text{C}$ for $T_C > +100^{\circ}\text{C}$

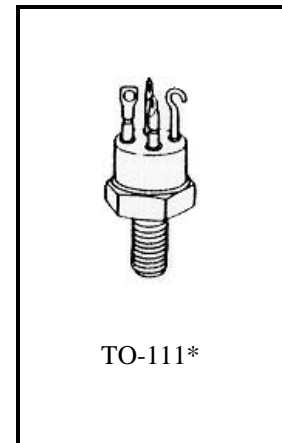

*See Appendix A for Package Outline

ELECTRICAL CHARACTERISTICS ($T_C = +25^{\circ}\text{C}$)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage $I_C = 50 \text{ mAdc}$	$V_{(BR)CEO}$	100		Vdc
Collector-Emitter Breakdown Voltage $I_C = 100 \mu\text{Adc}$	V_{CBO}	150		Vdc
Collector-Emitter Cutoff Current $V_{CE} = 80 \text{ Vdc}$	I_{CEO}		10	μAdc
Collector-Base Cutoff Current $V_{CB} = 120 \text{ Vdc}$	I_{CBO}		5.0	μAdc
Collector-Emitter Cutoff Current $V_{CE} = 120 \text{ Vdc}, V_{BE} = -1.0 \text{ Vdc}$	I_{CEX}		5.0	μAdc
Emitter-Base Cutoff Current $V_{EB} = 8.0 \text{ Vdc}$	I_{EBO}		2.0	μAdc
Collector-Emitter Cutoff Current $V_{CE} = 120 \text{ Vdc}, V_{BE} = 0 \text{ Vdc}$	I_{CES}		5.0	μAdc

2N2150, 2N2151 JANTX SERIES

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
ON CHARACTERISTICS				
Forward-Current Transfer Ratio $I_C = 1.0 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$ $I_C = 0.5 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$ $I_C = 0.1 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$ $I_C = 1.0 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$ $I_C = 0.5 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$ $I_C = 0.1 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$	2N2150 2N2151	20 20 20 40 40 40	60 60 120 120	
Base-Emitter Voltage Non -Saturated $V_{CE} = 5.0 \text{ Vdc}, I_C = 1.0 \text{ Adc}$	V_{BE}		1.2	Vdc
Collector-Emitter Saturation Voltage $I_C = 1.0 \text{ Adc}, I_B = 0.1 \text{ Adc}$	$V_{CE(sat)}$		1.0	Vdc
Base-Emitter Saturation Voltage $I_C = 1.0 \text{ Adc}, I_B = 0.1 \text{ Adc}$	$V_{BE(sat)}$		1.2	Vdc

DYNAMIC CHARACTERISTICS

Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 0.1 \text{ mAdc}, V_{CE} = 30 \text{ Vdc}, f = 10 \text{ MHz}$	$ h_{fe} $	1.0	7.0	
Output Capacitance $V_{CB} = 20 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	C_{obo}		160	pF

SAFE OPERATING AREA

Test 1 $V_{CE} = 15 \text{ Vdc}, I_C = 2.0 \text{ Adc}$ Test 2 $V_{CE} = 57 \text{ Vdc}, I_C = 200 \text{ mAdc}$ Test 3 $V_{CE} = 100 \text{ Vdc}, I_C = 25 \text{ mAdc}$



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.