


MECHANICAL DATA

Dimensions in mm

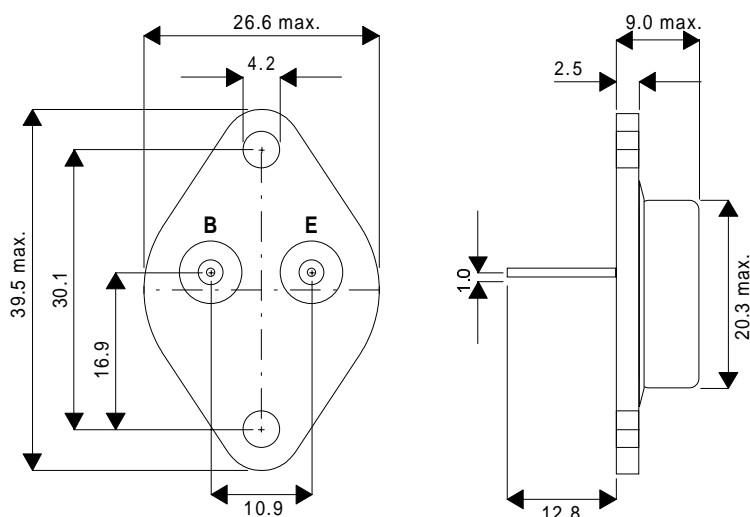

TO3 Package.
Case is collector.

PNP
DARLINGTON
POWER
TRANSISTOR

PNP Darlington transistors for audio output stages and general amplifier and switching applications.

**NPN complements are:
 BDX69, BDX69A, BDX69B, BDX69C.**

ABSOLUTE MAXIMUM RATINGS

($T_{case} = 25^{\circ}C$ unless otherwise stated)

		BDX 68	BDX 68A	BDX 68B	BDX 68C
V_{CBO}	Collector – Base Voltage (Open Emitter)	-60V	-80V	-100V	-120V
V_{CEO}	Collector – Emitter Voltage (Open Base)	-60V	-80V	-100V	-120V
V_{EBO}	Emitter – Base Voltage (Open Collector)	-5V	-5V	-5V	-5V
I_C	Collector Current	-25A			
I_{CM}	Collector Current (Peak)	-40A			
I_B	Base Current	-500mA			
P_{tot}	Total Power Dissipation at $T_{case} = 25^{\circ}C$	200W			
T_J	Maximum Junction Temperature	200°C			
T_{STG}	Storage Junction Temperature	-65 to 200°C			
$R_{\theta J-MB}$	Thermal Resistance, Junction to Mounting Base.	0.875°C / W			

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Units
I_{CBO} Collector Cut-off Current	$I_E = 0$ $V_{CB} = V_{CBOmax}$			2	mA
	$I_E = 0$ $V_{CB} = \frac{1}{2}V_{CBOmax}$ $T_J = 200^\circ\text{C}$			10	
I_{CEO} Collector Cut-off Current	$I_B = 0$ $V_{CE} = \frac{1}{2}V_{CEOmax}$			6	mA
I_{EBO} Emitter Cut-off Current	$I_C = 0$ $V_{EB} = -5V$			10	mA
h_{FE}^* D.C. Current Gain	$I_C = -5A$ $V_{CE} = -3V$		3000		—
	$I_C = -20A$ $V_{CE} = -3V$	1000			
	$I_C = -30A$ $V_{CE} = -3V$		1000		
V_{BE}^* Base – Emitter Voltage	$I_C = -20A$ $V_{CE} = -3V$			2.5	V
V_{CEsat}^* Collector - Emitter Saturation Voltage	$I_C = -20A$ $I_B = -80mA$			2	V
C_C Collector Capacitance	$I_E = I_e = 0$ $V_{CB} = -10V$ $f = 1MHz$		600		pF
f_{hfe} Cut-off Frequency	$I_C = -10A$ $V_{CE} = -3V$		60		kHz
$ h_{fe} $ Small Signal Current Gain	$I_C = -10A$ $V_{CE} = -3V$ $f = 1MHz$		20		—
V_F Diode, Forward Voltage	$I_F = 20A$		2		V
t_{on} Turn-on Time	$I_{Con} = -20A$		1		μs
t_{off} Turn-off Time	$I_{Bon} = -I_{Boff} = -80mA$		3.5		

* Pulse Test: $t_p < 300\mu\text{s}$, $\delta < 2\%$



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.