



**MECHANICAL DATA**

Dimensions in mm (inches)

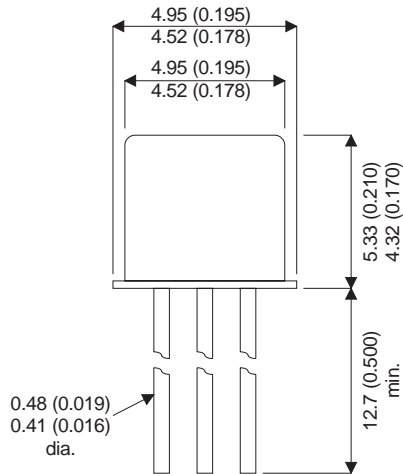

**TO-72 METAL PACKAGE**

**NPN TRANSISTOR**

**FEATURES**

- SILICON NPN TRANSISTOR

**APPLICATIONS:**

- AMPLIFIER, OSCILLATOR AND CONVERTER APPLICATIONS UP TO 500MHz

**ABSOLUTE MAXIMUM RATINGS** ( $T_A = 25^\circ\text{C}$  unless otherwise stated)

$V_{CBO}$	Collector – Base Voltage	30V
$V_{CEO}$	Collector – Emitter Voltage	15V
$V_{EBO}$	Emitter – Base Voltage	2.5V
$I_C$	Collector Current	40mA
$P_D$	Total Device Dissipation @ $T_A = 25^\circ\text{C}$	200mW
$P_D$	Total Device Dissipation @ $T_C = 25^\circ\text{C}$	300mW
$T_{STG}, T_J$	Operating and Storage Temperature Range	-65 to 200°C

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{(BR)CBO}^*$ Collector – Base Breakdown Voltage	$I_C = 1\mu\text{A}$ $I_E = 0$	30			V
$V_{(BR)CEO}$ Collector – Emitter Breakdown Voltage	$I_C = 3\text{mA}$ $I_B = 0$	15			
$V_{(BR)EBO}$ Emitter – Base Breakdown Voltage	$I_E = 10\mu\text{A}$ $I_C = 0$	2.5			
$I_{CBO}$ Collector – Base Cut-off Current	$V_{CB} = 15\text{V}$ $I_E = 0$			10	nA
	$T_{amb} = 150^\circ\text{C}$			1	$\mu\text{A}$
$h_{FE}$ DC Current Gain	$V_{CE} = 1\text{V}$ $I_C = 3\text{mA}$	30		150	—
NF Noise Figure	$V_{CE} = 6\text{V}$ $I_C = 1.5\text{mA}$ $f = 450\text{MHz}$ $R_G = 50\Omega$		3.8	4.5	dB
$C_{EBO}$ Emitter Base Capacitance	$V_{EB} = 0.5\text{V}$ $I_C = 0$ $f = 1\text{MHz}$		1.4		pF
$G_{pe}$ Power Gain (Neutralised)	$V_{CE} = 6\text{V}$ $I_C = 1.5\text{mA}$ $f = 450\text{MHz}$ $R_G = 50\Omega$	12.5		19	dB
$r_{bB}'C_{b'c}$ Feedback Time Constant	$V_{CB} = 6\text{V}$ $I_C = 2\text{mA}$ $f = 31.9\text{MHz}$	4	7	15	ps
$f_T$ Transition Frequency	$V_{CE} = 6\text{V}$ $I_C = 5\text{mA}$ $f = 100\text{MHz}$	1		1.9	GHz
$C_{re}$ Reverse Capacitance	$V_{CE} = 10\text{V}$ $I_C = 0$ $f = 1\text{MHz}$		0.6	1	pF
$P_C$ Oscillator Power Output	$V_{CB} = 10\text{V}$ $I_C = 12\text{mA}$ $f = 500\text{MHz}$	30			mW



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.