
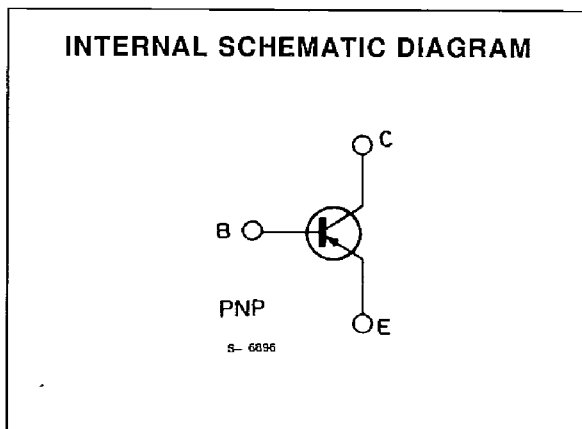
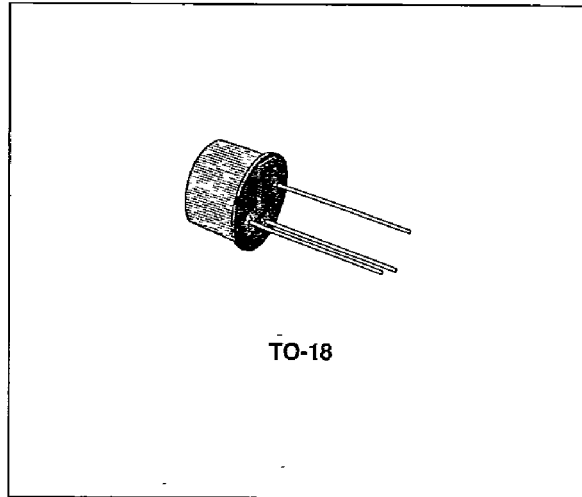


HIGH-SPEED SATURATED SWITCHES

DESCRIPTION

The 2N2894, and 2N3209 are silicon planar epitaxial PNP transistors in Jedec TO-18 metal case, intended for high speed, low saturation switching applications up to 100 mA.

 Products approved to CECC 50004-022/023 available on request.



ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value		Unit
		2N2894	2N3209	
V_{CB0}	Collector-base Voltage ($I_E = 0$)	- 12	- 20	V
V_{CES}	Collector-emitter Voltage ($V_{BE} = 0$)	- 12	- 20	V
V_{CEO}	Collector-emitter Voltage ($I_B = 0$)	- 12	- 20	V
V_{EBO}	Emitter-base Voltage ($I_C = 0$)	- 4		V
I_C	Collector Current	- 200		mA
P_{tot}	Total Power Dissipation at $T_{amb} \leq 25\text{ }^\circ\text{C}$ at $T_{case} \leq 25\text{ }^\circ\text{C}$	0.36		W
		1.2		W
T_{stg}, T_j	Storage and Junction Temperature	- 65 to 200		$^\circ\text{C}$

THERMAL DATA

$R_{th\ j-case}$	Thermal Resistance Junction-case	Max	146	°C/W
$R_{th\ j-amb}$	Thermal Resistance Junction-ambient	Max	486	°C/W

ELECTRICAL CHARACTERISTICS ($T_{amb} = 25\text{ °C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CBO}	Collector Cutoff Current ($I_E = 0$) (for 2N2894 only)	$V_{CB} = -6\text{ V}$ $T_{amb} = 125\text{ °C}$			-10	μA
I_{CES}	Collector Cutoff Current ($V_{BE} = 0$)	for 2N2894 $V_{CE} = -6\text{ V}$ for 2N3209 $V_{CE} = -10\text{ V}$ $V_{CE} = -10\text{ V}$ $T_{amb} = 125\text{ °C}$			-80 -80 -10	nA nA μA
$V_{(BR)CBO}$	Collector-base Breakdown Voltage ($I_E = 0$)	$I_C = -10\text{ }\mu\text{A}$ for 2N2894 for 2N3209	-12 -20			V V
$V_{(BR)CES}$	Collector-emitter Breakdown Voltage ($V_{BE} = 0$)	$I_C = -10\text{ }\mu\text{A}$ for 2N2894 for 2N3209	-12 -20			V V
$V_{(BR)CEO}^*$	Collector-emitter Breakdown Voltage ($I_B = 0$)	$I_C = -10\text{ mA}$ for 2N2894 for 2N3209	-12 -20			V V
$V_{(BR)EBO}$	Emitter-base Breakdown Voltage ($I_C = 0$)	$I_E = -100\text{ }\mu\text{A}$	-4			V
$V_{CE(sat)}^*$	Collector-emitter Saturation Voltage	for 2N2894 $I_C = -10\text{ mA}$ $I_B = -1\text{ mA}$ $I_C = -30\text{ mA}$ $I_B = -3\text{ mA}$ $I_C = -100\text{ mA}$ $I_B = -10\text{ mA}$ for 2N3209 $I_C = -10\text{ mA}$ $I_B = -1\text{ mA}$ $I_C = -30\text{ mA}$ $I_B = -3\text{ mA}$ $I_C = -100\text{ mA}$ $I_B = -10\text{ mA}$			-0.15 -0.2 -0.5 -0.15 -0.2 -0.6	V V V V V V
$V_{BE(sat)}^*$	Base-emitter Saturation Voltage	$I_C = -10\text{ mA}$ $I_B = -1\text{ mA}$ $I_C = -30\text{ mA}$ $I_B = -3\text{ mA}$ $I_C = -100\text{ mA}$ $I_B = -10\text{ mA}$	-0.78 -0.85		-0.98 -1.2 -1.7	V V V
h_{FE}^*	DC Current Gain	$I_C = -10\text{ mA}$ $V_{CE} = -0.3\text{ V}$ for 2N2894 for 2N3209 $I_C = -30\text{ mA}$ $V_{CE} = -0.5\text{ V}$ for 2N2894 for 2N3209 $I_C = -100\text{ mA}$ $V_{CE} = -1\text{ V}$ for 2N2894 for 2N3209 $I_C = -30\text{ mA}$ $V_{CE} = -0.5\text{ V}$ $T_{amb} = -55\text{ °C}$ for 2N2894 for 2N3209	30 25 40 30 25 15 17 12		150 120	
f_T	Transition Frequency	$I_C = -30\text{ mA}$ $V_{CE} = -10\text{ V}$ $f = 100\text{ MHz}$	400			MHz
C_{EBO}	Emitter-base Capacitance	$I_C = 0$ $V_{EB} = -0.5\text{ V}$ $f = 1\text{ MHz}$			6	pF

* Pulsed : pulse duration = 300 μs , duty cycle = 1 %.

SGS-THOMSON


ELECTRICAL CHARACTERISTICS (continued)

T-37-09


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
C_{CB0}	Collector-base Capacitance	$I_E = 0$ $f = 1 \text{ MHz}$ for 2N2894 $V_{CB} = -5 \text{ V}$ for 2N3209			6 5	pF pF
t_{on}^{**}	Turn-on Time	$I_C = -30 \text{ mA}$ $V_{CC} = -2 \text{ V}$ $I_{B1} = -1.5 \text{ mA}$			60	ns
t_{off}^{**}	Turn-off Time	$I_C = -30 \text{ mA}$ $V_{CC} = -2 \text{ V}$ $I_{B1} = -I_{B2} = -1.5 \text{ mA}$			90	ns

** See test circuit.


Collector-emitter Saturation Voltage.

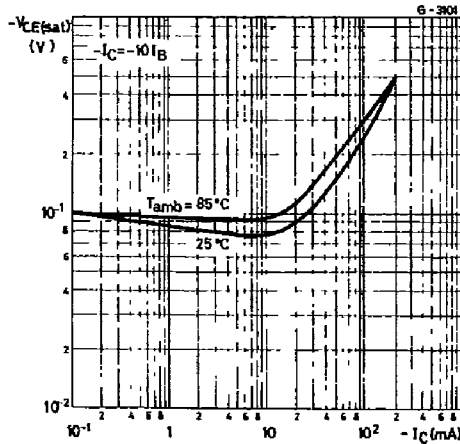


Emitter-base and Collector-base capacitance.

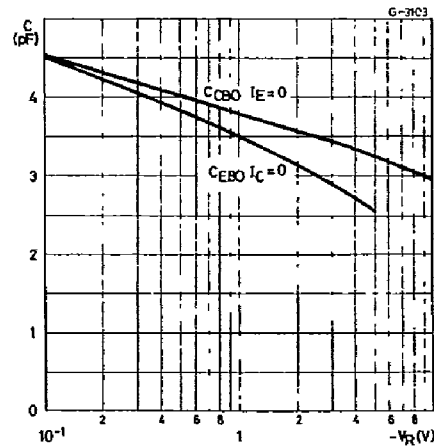


Contours of Constant Transition Frequency.

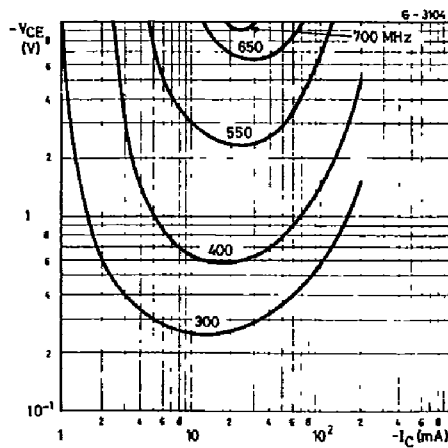

Switching Characteristics.

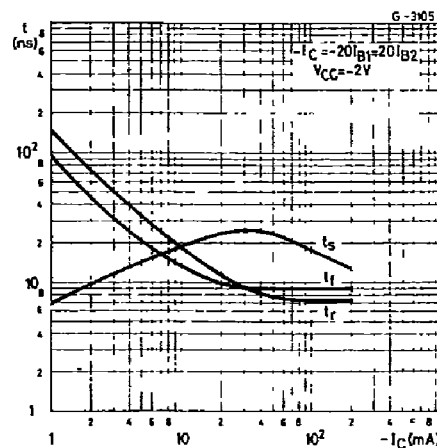

TEST CIRCUIT FOR t_{on} , t_{off} .

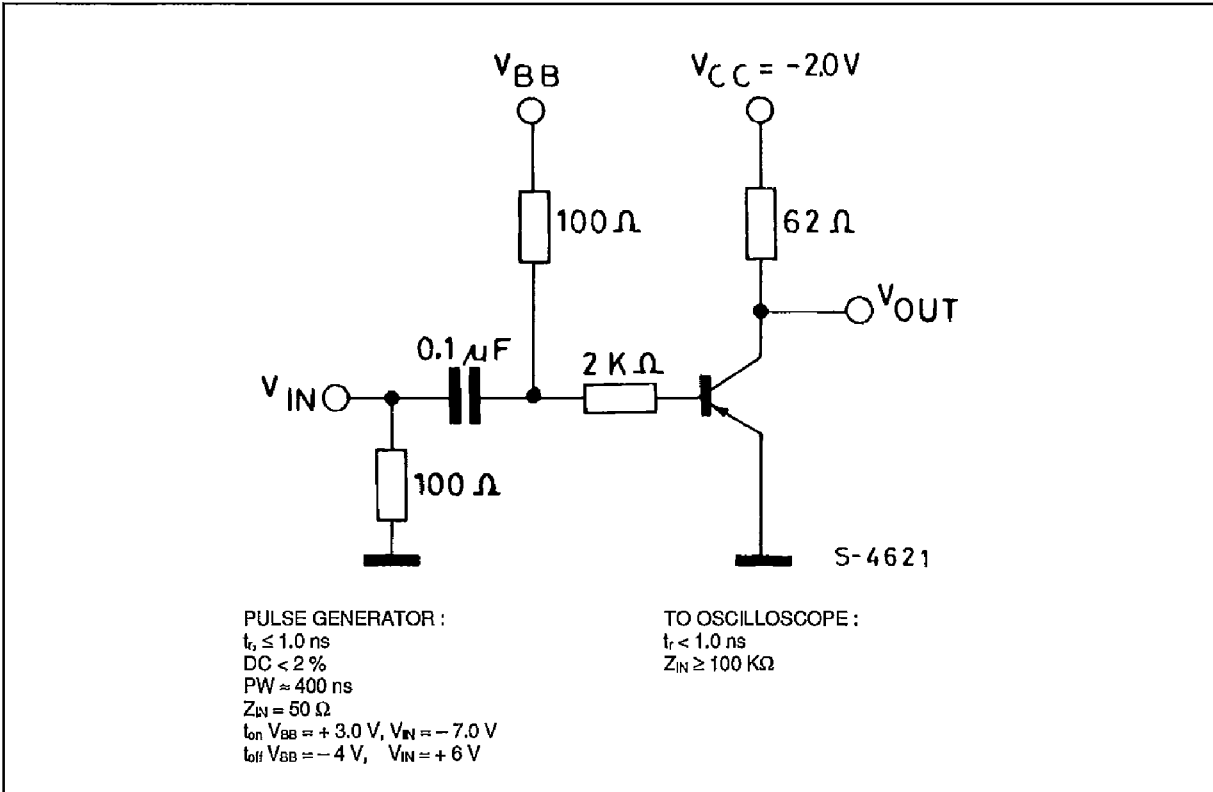



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.