


GENERAL PURPOSE APPLICATION.
LOW NOISE AMPLIFIER APPLICATION.

FEATURES

- High Voltage : BC307 $V_{CE0}=-45V$.
- Low Noise : BC309 NF=0.2dB(Typ.), 3dB(Max.)
($V_{CE}=-6V, I_C=-0.1mA, f=1kHz$).
- For Complementary With NPN type BC237/238/239.

MAXIMUM RATING ($T_a=25^{\circ}C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	BC307	-50	V
	BC308	-30	
	BC309	-30	
Collector-Emitter Voltage	BC307	-45	V
	BC308	-25	
	BC309	-20	
Emitter-Base Voltage	BC307	-5	V
	BC308	-5	
	BC309	-5	
Collector Current	BC307	-100	mA
	BC308	-100	
	BC309	-50	
Emitter Current	BC307	100	mA
	BC308	100	
	BC309	50	
Collector Power Dissipation	P_C	625	mW
Junction Temperature	T_j	150	$^{\circ}C$
Storage Temperature Range	T_{stg}	-55 ~ 150	$^{\circ}C$

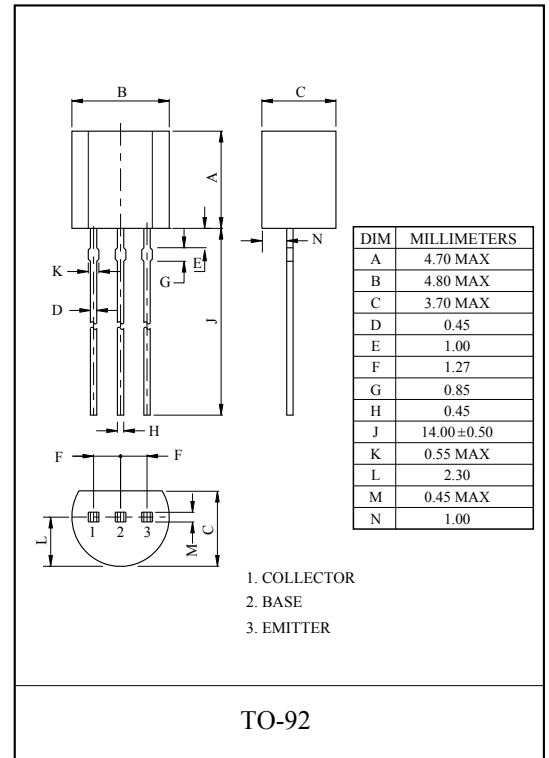

BC307/8/9

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I_{CBO}	$V_{CB}=-50V, I_E=0$	-	-	-15	nA
DC Current Gain (Note)	BC307	h_{FE}	$V_{CE}=-5V, I_C=-2mA$	120	-	460	
	BC308			120	-	800	
	BC309			180	-	800	
Collector-Emitter Saturation Voltage	BC307	$V_{CE(sat)}$	$I_C=-100mA, I_B=-5mA$	-	-	-0.6	V
	BC308		$I_C=-10mA, I_B=-0.5mA$	-	-	-0.6	
	BC309			-	-	-0.2	
Base-Emitter Saturation Voltage	BC307	$V_{BE(sat)}$	$I_C=-100mA, I_C=-5mA$	-	-	-1.0	V
	BC308		$I_C=-10mA, I_B=-0.5mA$	-	-	-1.0	
	BC309			-	-	-0.8	
Base-Emitter Voltage		$V_{BE(ON)}$	$V_{CE}=-5V, I_C=-2mA$	-0.55	-	-0.7	V
Transition Frequency		f_T	$V_{CE}=-5V, I_C=-10mA, f=100MHz$	-	200	-	MHz
Collector Output Capacitance		C_{ob}	$V_{CB}=-10V, f=1MHz, I_E=0$	-	-	6.0	pF
Noise Figure	BC307	NF	$V_{CE}=-6V, I_C=-0.1mA$ $R_g=10k\Omega, f=1kHz$	-	1.0	10	dB
	BC308			-	1.0	10	
	BC309			-	0.2	3.0	

NOTE : According to the Value of h_{FE} the BC307, BC308, BC309 are classified as follows.

CLASSIFICATION		A	B	C
h_{FE}	BC307	120 ~ 220	180 ~ 460	-
	BC308	120 ~ 220	180 ~ 460	380 ~ 800
	BC309	-	180 ~ 460	380 ~ 800



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.