


GENERAL PURPOSE APPLICATION.
SWITCHING APPLICATION .

FEATURES

- For Complementary With NPN Type BC546/547/548.

MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	BC556	-80	V
	BC557	-50	
	BC558	-30	
Collector-Emitter Voltage	BC556	-65	V
	BC557	-45	
	BC558	-30	
Emitter-Base Voltage	BC556	-5	V
	BC557	-5	
	BC558	-5	
Collector Current	BC556	-100	mA
	BC557	-100	
	BC558	-100	
Emitter Current	BC556	100	mA
	BC557	100	
	BC558	100	
Collector Power Dissipation	P _C	625	mW
Junction Temperature	T _j	150	°C
Storage Temperature Range	T _{stg}	-55 ~ 150	°C

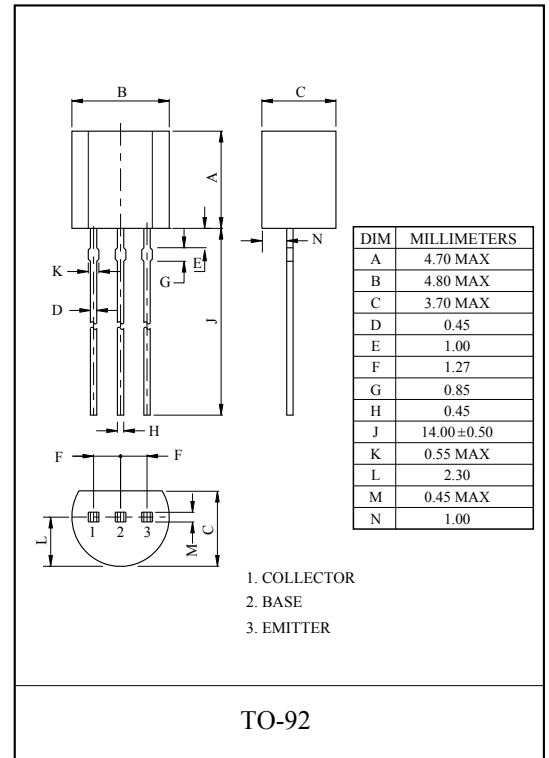

BC556/7/8







ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Collector Cut-off Current		I_{CBO}	$V_{CB}=-30V, I_E=0$	-	-	-15	nA	
DC Current Gain (Note)	BC556	h_{FE}	$V_{CE}=-5V, I_C=-2mA$	110	-	450		
	BC557			110	-	800		
	BC558			110	-	800		
Collector-Emitter Saturation Voltage	BC556	$V_{CE(sat)}$	$I_C=-100mA, I_B=-5mA$	-	-	-0.65	V	
	BC557			-	-	-0.65		
	BC558			-	-	-0.65		
Base-Emitter Saturation Voltage	BC556	$V_{BE(sat)}$	$I_C=-100mA, I_C=-5mA$	-	-0.9	-1.1	V	
	BC557			-	-0.9	-1.1		
	BC558			-	-0.9	-1.1		
Base-Emitter Voltage			$V_{BE(ON)1}$	$V_{CE}=-5V, I_C=-2mA$	-0.6	-	-0.75	V
			$V_{BE(ON)2}$	$V_{CE}=-5V, I_C=-10mA$	-	-	-0.8	V
Transition Frequency		f_T	$V_{CE}=-5V, I_C=-10mA, f=100MHz$	-	150	-	MHz	
Collector Output Capacitance		C_{ob}	$V_{CB}=-10V, f=1MHz, I_E=0$	-	4.5	-	pF	
Noise Figure	BC556	NF	$V_{CE}=-6V, I_C=-0.1mA$ $R_g=10k\Omega, f=1kHz$	-	1.0	10	dB	
	BC557			-	1.0	10		
	BC558			-	1.0	10		

NOTE : According to the value of h_{FE} the BC546, BC547, BC548 are classified as follows.

CLASSIFICATION		none	A	B	C
h_{FE}	BC556	110 ~ 450	110 ~ 220	200 ~ 450	-
	BC557	110 ~ 800	110 ~ 220	200 ~ 450	420 ~ 800
	BC558	110 ~ 800	110 ~ 220	200 ~ 450	420 ~ 800

BC556/7/8

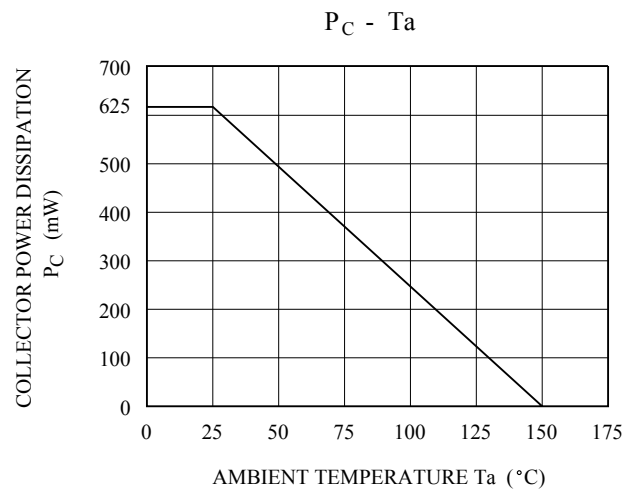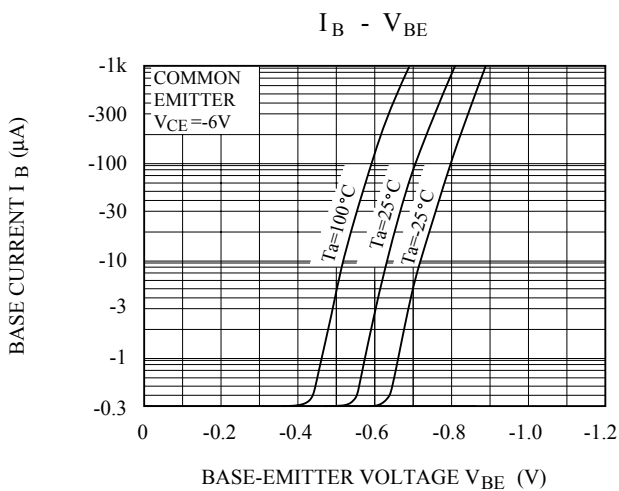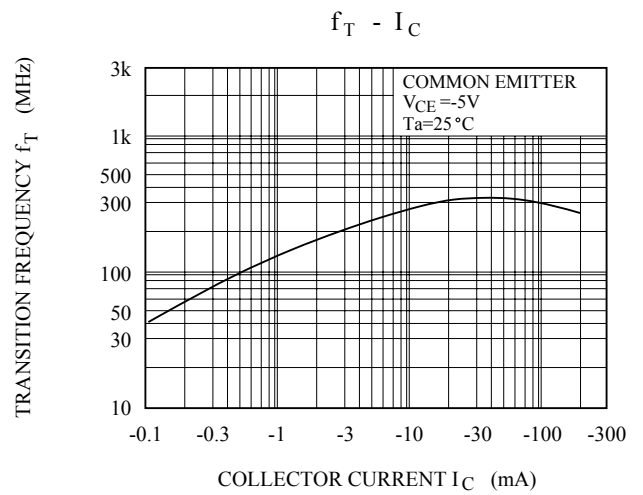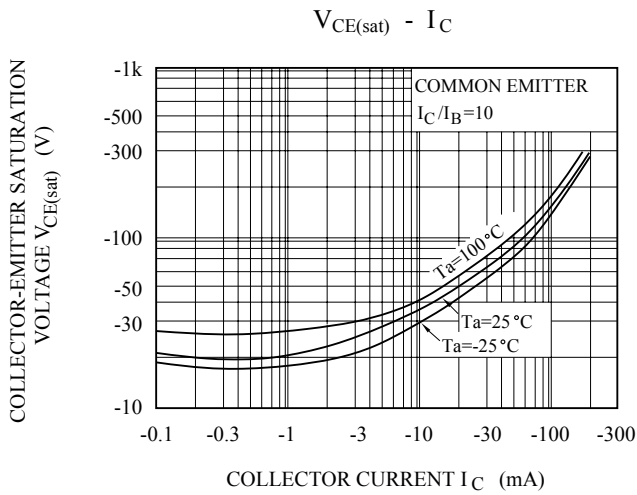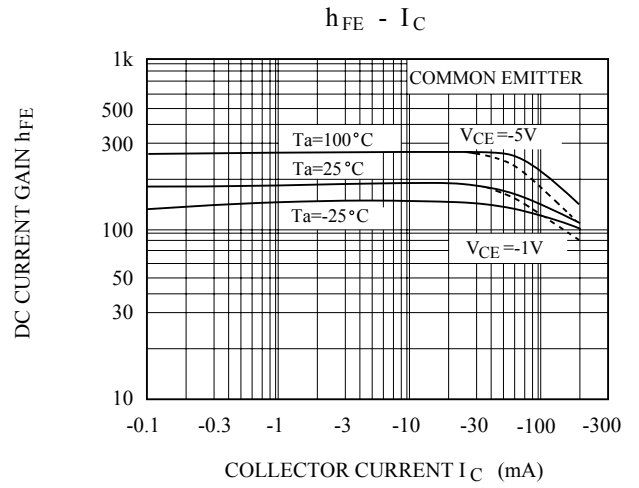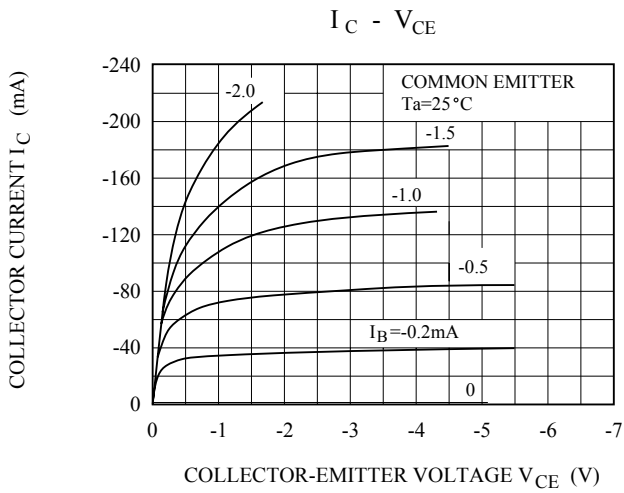



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.