

# Central<sup>TM</sup> Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA  
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

CBR1 SERIES  
CBR2 SERIES

SILICON BRIDGE RECTIFIERS

CASE A

## DESCRIPTION


The CENTRAL SEMICONDUCTOR CBR1, CBR2, types are silicon single phase full wave Bridge Rectifiers designed for general purpose applications.

## MAXIMUM RATINGS (T<sub>A</sub>=50°C)

	SYMBOL	CBR1 -010	CBR1 -020	CBR1 -040	CBR1 -060	CBR1 -080	CBR1 -100	UNIT
Peak Repetitive Reverse Voltage	V <sub>R</sub> RM	100	200	400	600	800	1000	V
DC Blocking Voltage	V <sub>R</sub>	100	200	400	600	800	1000	V
RMS Reverse Voltage	V <sub>R</sub> (RMS)	70	140	280	420	560	700	V
Average Forward Current (CBR1)	I <sub>O</sub>			1.5				A
Average Forward Current (CBR2)	I <sub>O</sub>			2.0				A
Peak Forward Surge Current (CBR1)	I <sub>FSM</sub>			50				A
Peak Forward Surge Current (CBR2)	I <sub>FSM</sub>			60				A
Operating and Storage Junction Temperature	T <sub>J</sub> , T <sub>stg</sub>	-65 TO +150						°C

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNIT
V <sub>F</sub> (CBR1 Series)	I <sub>F</sub> =1.0A		1.0	V
V <sub>F</sub> (CBR2 Series)	I <sub>F</sub> =2.0A		1.1	V
I <sub>R</sub>	V <sub>R</sub> =Rated V <sub>R</sub> RM		10	μA

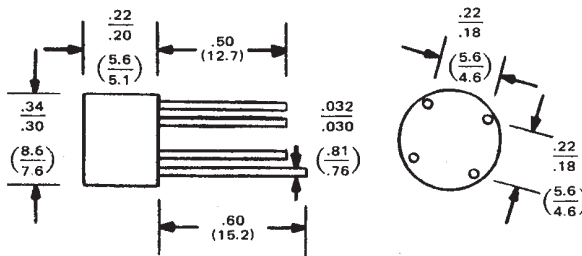

DIMENSIONS IN INCHES (MILLIMETERS)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.