

# Central<sup>TM</sup> Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA  
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

## CBR6M-L010 SERIES

SILICON BRIDGE RECTIFIER  
6.0 AMP, 100 THRU 1000 VOLTS

CASE DM

### DESCRIPTION

The CENTRAL SEMICONDUCTOR CBR6M-L010 series types are silicon single phase full wave bridge rectifiers designed for general purpose, high current applications.


### MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

	<u>SYMBOL</u>	<u>CBR6M</u> <u>-L010</u>	<u>CBR6M</u> <u>-L020</u>	<u>CBR6M</u> <u>-L040</u>	<u>CBR6M</u> <u>-L060</u>	<u>CBR6M</u> <u>-L080</u>	<u>CBR6M</u> <u>-L100</u>	<u>UNITS</u>
Peak Repetitive Reverse Voltage	$V_{RRM}$	100	200	400	600	800	1000	V
DC Blocking Voltage	$V_R$	100	200	400	600	800	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	70	140	280	420	560	700	V
Average Forward Current ( $T_C = 100^\circ\text{C}$ )	$I_O$			6.0				A
Peak Forward Surge Current	$I_{FSM}$			250				A
Operating and Storage Junction Temperature	$T_J, T_{stg}$			-65 to +150				$^\circ\text{C}$
Thermal Resistance	$\theta_{JC}$			3.5				$^\circ\text{C/W}$

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ )

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>MAX</u>	<u>UNITS</u>
$V_F$	$I_F = 6.0\text{A}$		1.1	V
$I_R$	$V_R = \text{Rated } V_{RRM}$		10	$\mu\text{A}$
$I_R$	$V_R = \text{Rated } V_{RRM}, T_C = 100^\circ\text{C}$		200	$\mu\text{A}$

**CASE DM - MECHANICAL OUTLINE**

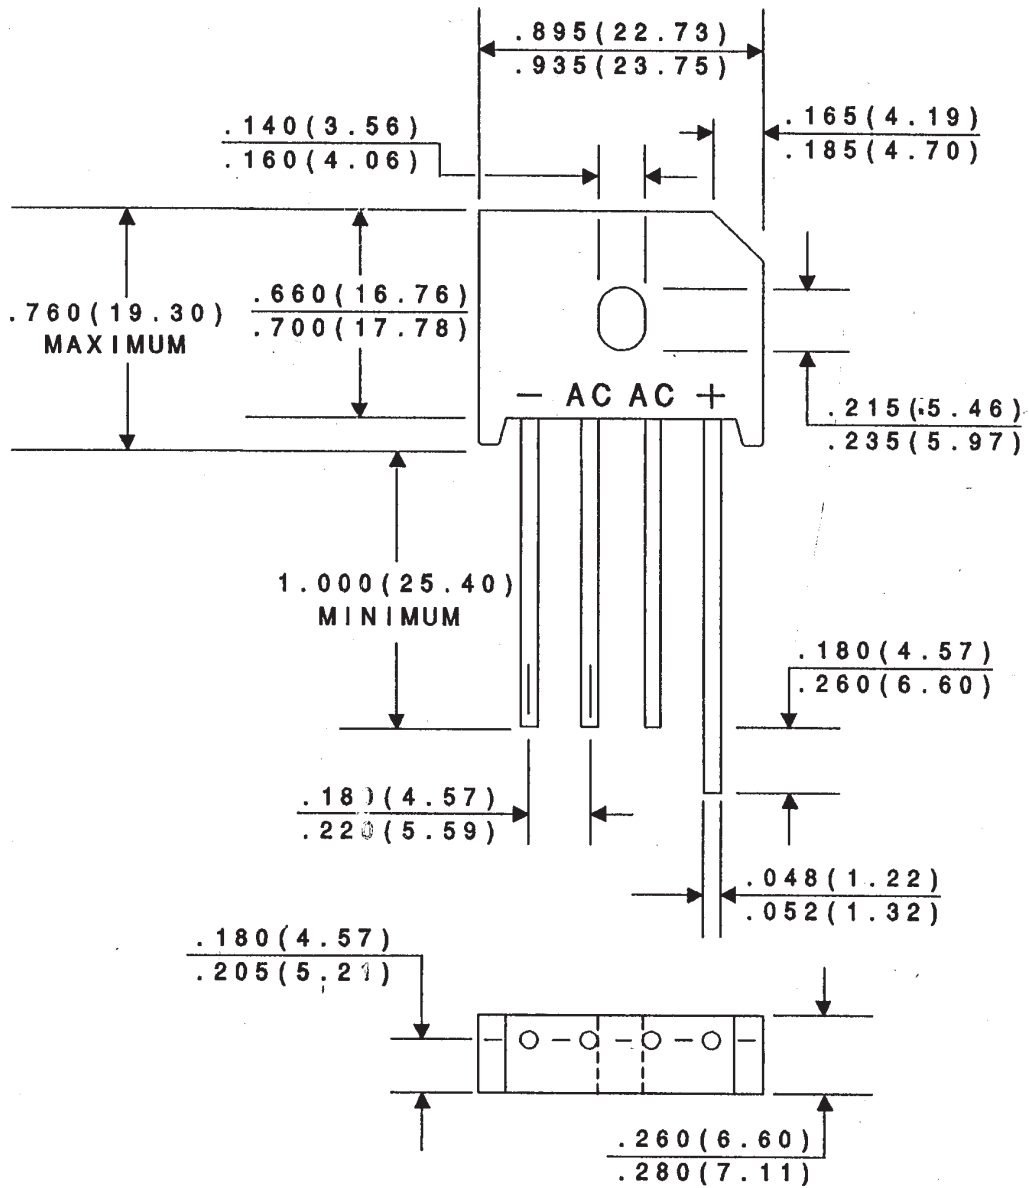

All Dimensions in inches (mm).

**Central<sup>TM</sup>**  
**Semiconductor Corp.**

145 Adams Avenue  
 Hauppauge, NY 11788 USA  
 Tel: (631) 435-1110 • Fax: (631) 435-1824  
[www.centalsemi.com](http://www.centalsemi.com)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.