


BB731S


Tuner Diodes

SOD-323

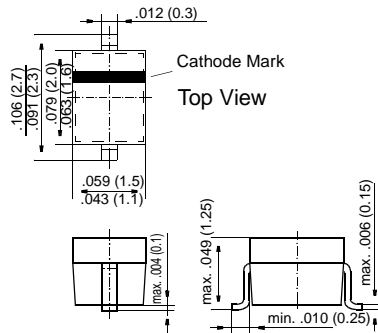

Dimensions in inches and (millimeters)

FEATURES

- ◆ Silicon epitaxial planar capacitance diodes with very wide effective capacitance variation for tuning the VHF range 41 ... 170 MHz in hyperband television tuners. 
- ◆ These diodes are available as singles or as matched sets of two or more units according to the tracking condition described in the table of characteristics.
- ◆ This diode is also available in SOD-123 case with the type designation BB731.

MECHANICAL DATA

Case: SOD-323 Plastic Package

Weight: approx. 0.004 g

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Value	Unit
Reverse Voltage	V_R	32	V
Ambient Temperature	T_{amb}	125	°C
Storage Temperature Range	T_S	-55 to +125	°C

BB731S

ELECTRICAL CHARACTERISTICS


Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 100 \mu\text{A}$	$V_{(BR)R}$	32	–	–	V
Leakage Current at $V_R = 30 \text{ V}$	I_R	–	–	10	nA
Capacitance, $f = 1 \text{ MHz}$ at $V_R = 28 \text{ V}$ at $V_R = 1 \text{ V}$	C_{tot} C_{tot}	2.9 62.0	– –	3.4 76.0	pF pF
Effective Capacitance Ratio, $f = 1 \text{ MHz}$ at $V_R = 1 \text{ to } 28 \text{ V}$	$\frac{C_{\text{tot}}(1 \text{ V})}{C_{\text{tot}}(28 \text{ V})}$	19.5	–	–	–
Series Resistance at $f = 300 \text{ MHz}$, $C_{\text{tot}} = 25 \text{ pF}$	r_s	–	1.0	–	Ω
Series Inductance	L_s	–	2.5	–	nH


For any two of six consecutive diodes in the carrier tape, the maximum capacitance deviation in the reverse bias voltage of $V_R = 0.5 \text{ to } 28 \text{ V}$ is max. 2.5%

RATINGS AND CHARACTERISTIC CURVES BB731S


Capacitance versus reverse voltage

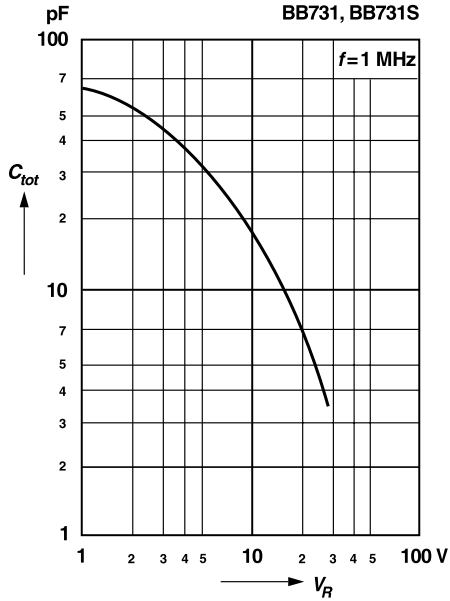


Leakage current versus reverse voltage

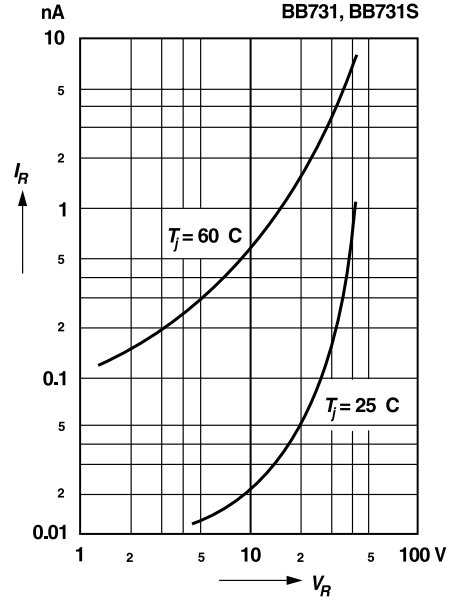

Relative capacitance versus junction temperature

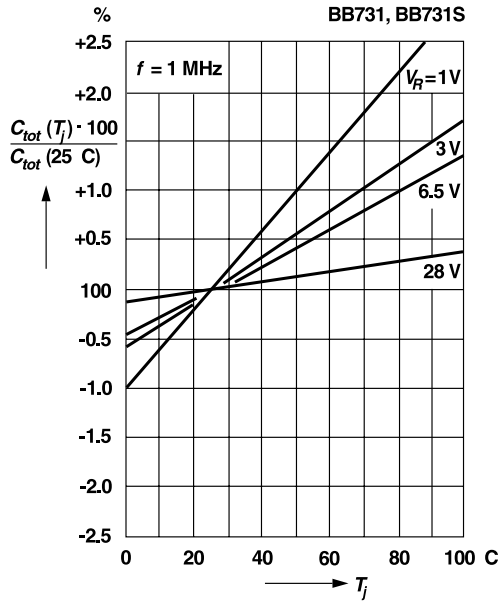

Q-Factor versus frequency

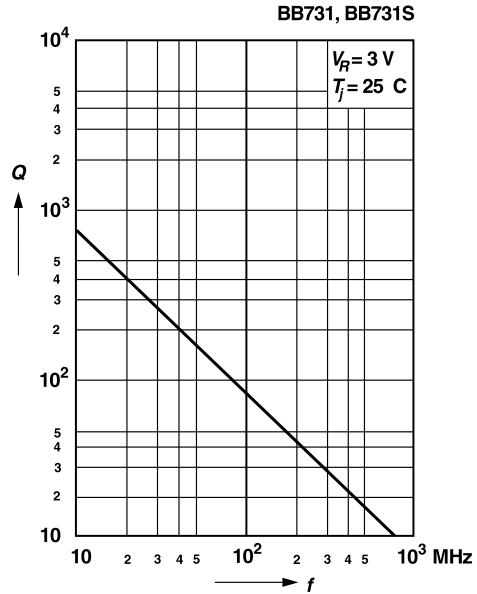



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.