

TOSHIBA PHOTOCOUPLER IRED & PHOTO-TRANSISTOR

TLP572

PROGRAMMABLE CONTROLLERS

AC/DC – INPUT MODULE


SOLID STATE RELAY

The TOSHIBA TLP572 consists of a darlington connected photo-transistor optically coupled to a gallium arsenide infrared emitting diode in a six lead plastic DIP package.


TLP572 is no-base internal connection for high-EMI environments.

- Collector-Emitter Voltage : 55V (Min.)
- Current Transfer Ratio : 1000% (Min.)
- Isolation Voltage : 2500Vrms (Min.)
- UL Recognized : UL1577, File No. E67349

Unit in mm

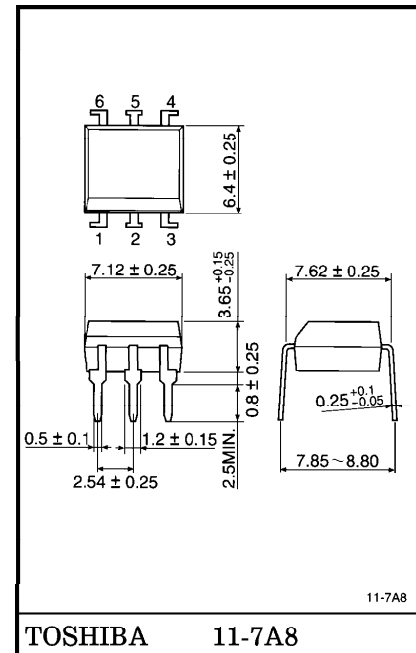

PIN CONFIGURATIONS (TOP VIEW)



961001EBC2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
LED	Forward Current	I_F	50	mA
	Forward Current Derating ($T_a \geq 53^\circ\text{C}$)	$I_F / ^\circ\text{C}$	-0.7	mA / $^\circ\text{C}$
	Peak Forward Current (100 μs pulse, 100pps)	I_{FP}	1	A
	Reverse Voltage	V_R	5	V
	Junction Temperature	T_j	125	$^\circ\text{C}$
DETECTOR	Collector-Emitter Voltage	V_{CEO}	55	V
	Emitter-Collector Voltage	V_{ECO}	0.3	V
	Collector Current	I_C	150 / -10	mA
	Power Dissipation	P_C	150	mW
	Power Dissipation Derating ($T_a \geq 25^\circ\text{C}$)	$P_C / ^\circ\text{C}$	-1.5	mW / $^\circ\text{C}$
	Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-55~125	$^\circ\text{C}$
Operating Temperature Range		T_{opr}	-30~85	$^\circ\text{C}$
Lead Soldering Temperature (10s)		T_{sol}	260	$^\circ\text{C}$
Total Package Power Dissipation		P_T	200	mW
Total Package Power Dissipation Derating ($T_a \geq 25^\circ\text{C}$)		$P_D / ^\circ\text{C}$	-2.6	mW / $^\circ\text{C}$
Isolation Voltage (AC, 1min., R.H. $\leq 60\%$) (Note 1)		BV_S	2500	V_{rms}

(Note 1) Device considered a two terminal device : Pins 1, 2 and 3 shorted together and pins 4, 5 and 6 shorted together.

RECOMMEND OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V_{CC}	—	12	24	V
Forward Current	I_F	—	—	25	mA
Collector Current	I_C	—	—	40	mA
Operating Temperature	T_{opr}	-30	—	85	$^\circ\text{C}$

INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	V_F	$I_F = 10\text{mA}$	1.0	1.15	1.3	V
	Reverse Current	I_R	$V_R = 5\text{V}$	—	—	10	μA
	Capacitance	C_T	$V = 0, f = 1\text{MHz}$	—	30	—	pF
DETECTOR	Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1\text{mA}$	55	—	—	V
	Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	$I_E = 0.1\text{mA}$	0.3	—	—	V
	Collector Dark Current	I_{CEO}	$V_{CE} = 24\text{V}$	—	10	200	nA
			$V_{CE} = 24\text{V}, T_a = 85^\circ\text{C}$	—	0.5	10	μA
	Capacitance (Collector to Emitter)	C_{CE}	$V = 0, f = 1\text{MHz}$	—	10	—	pF

COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Current Transfer Ratio	I_C / I_F	$I_F = 1\text{mA}, V_{CE} = 1.2\text{V}$	1000	2000	—	%
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 100\text{mA}, I_F = 10\text{mA}$	0.3	—	1.2	V

ISOLATION CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Capacitance (Input to Output)	C_S	$V_S = 0, f = 1\text{MHz}$	—	0.8	—	pF
Isolation Resistance	R_S	$V_S = 500\text{V}, R.H. \leq 60\%$	5×10^{10}	10^{14}	—	Ω
AC Isolation Voltage	BV_S	AC, 1 minute	2500	—	—	V_{rms}

SWITCHING CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Rise Time	t_r	$V_{CC} = 10V, I_C = 10mA$ $R_L = 100\Omega$	—	—	—	μs
Fall Time	t_f		—	—	—	
Turn-on Time	t_{on}		—	—	—	
Turn-off Time	t_{off}		—	—	—	
Turn-on Time	t_{ON}	$R_L = 180\Omega$ (Fig.1) $V_{CC} = 10V, I_F = 10mA$	—	3	—	μs
Storage Time	t_s		—	—	—	
Turn-off Time	t_{OFF}		—	30	—	

Fig.1 SWITCHING TIME TEST CIRCUIT

