

SPECIFICATION

DEVICE NAME : IGBT
 TYPE NAME : 1MB05-120
 SPEC. No. : MS5F3527
 DATE : Jun.-25-1996

Fuji Electric Co.,Ltd.

This Specification is subject to change without notice.

	DATE	NAME	APPROVED	Fuji Electric Co.,Ltd	
DRAWN	Jun-25-96	K. Yawaguchi		DWG. NO.	MS5F3527
CHECKED	Jun-25-96				


■ 2238792 0004289 T68 ■

H04-004-07

Ratings and characteristics of Fuji IGBT

1MB05-120

1. Outline Drawing

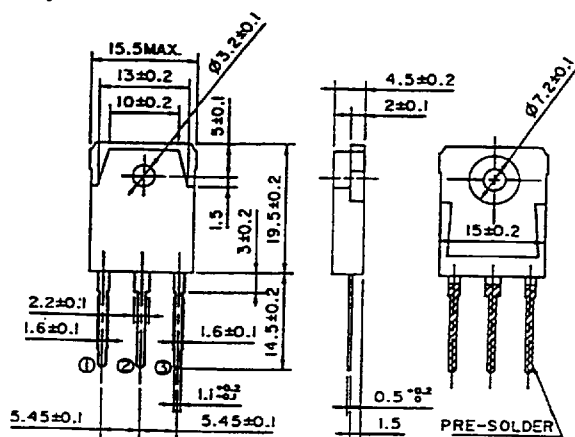


CONNECTION

- ① GATE
- ② COLLECTOR
- ③ EMITTER

EIAJ : SC-65

2. Equivalent circuit

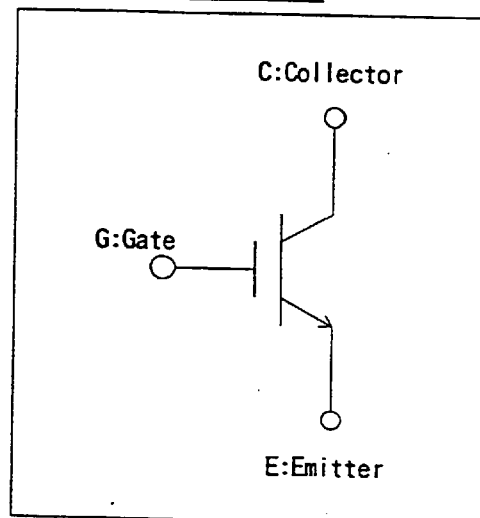

3. Absolute maximum ratings (Tc=25°C)

Items			Symbols	Ratings	Units
Collector-Emitter Voltage			V_{CES}	1200	V
Gate-Emitter Voltage			V_{GES}	± 20	V
Collector Current	DC	Tc=25 °C	I_{C25}	9	A
		Tc=100°C	I_{C100}	5	A
	1ms	Tc=25 °C	I_{CP}	~27	A
IGBT Max. Power Dissipation			P_C	100	W
Operating Temperature			T_J	+ 150	°C
Storage Temperature			T_{stg}	-40 ~ +150	°C
Mounting Screw Torque			—	50	N · cm

Fuji Electric Co., Ltd.

DWG. NO.

MS5F3527

2/10

2238792 0004290 7&T

H04-004-03

4. Electrical Characteristics (at Tc=25°C unless otherwise specified)

Items		Symbols	Characteristics			Conditions	Unit
			min.	typ.	max.		
Zero gate voltage Collector Current		I_{CES}			1.0	$V_{GE} = 0V$ $V_{CE} = 1200V$	mA
Gate-Emitter leakage Current		I_{GES}			20	$V_{CE} = 0V$ $V_{GE} = \pm 20V$	μA
Gate-Emitter Threshold Voltage		$V_{GE(th)}$	5.5		8.5	$V_{CE} = 20V$ $I_C = 5mA$	V
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			3.5	$V_{GE} = 15V$ $I_C = 5A$	V
Input capacitance		C_{ies}		650		$V_{GE} = 0V$	pF
Output capacitance		C_{oes}		150		$V_{CE} = 10V$	
Reverse transfer capacitance		C_{res}		40		$f = 1MHz$	
Switching Time	Turn-on time	t_{on}			1.2	$V_{CC} = 600V$ $I_C = 5 A$ $V_{GE} = \pm 15V$ $R_G = 330 \Omega$ (Half Bridge)	μs
		t_r			0.6		
	Turn-off time	t_{off}			1.5		
		t_f			0.5		
	Turn-on time	t_{on}		0.16		$V_{CC} = 600V$ $I_C = 5 A$ $V_{GE} = +15V$ $R_G = 33 \Omega$ (Half Bridge)	
		t_r		0.11			
	Turn-off time	t_{off}		0.30			
		t_f			0.50		

5. Thermal resistance characteristics

Items	Symbols	Characteristics			Conditions	Unit
		min.	typ.	max.		
Thermal resistance	$R_{th(j-c)}$			1.25	IGBT	$^{\circ}C/W$

Fuji Electric Co.,Ltd.

DWG.NO.



MS5F3527

3/10

2238792 0004291 616

H04-004-03

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

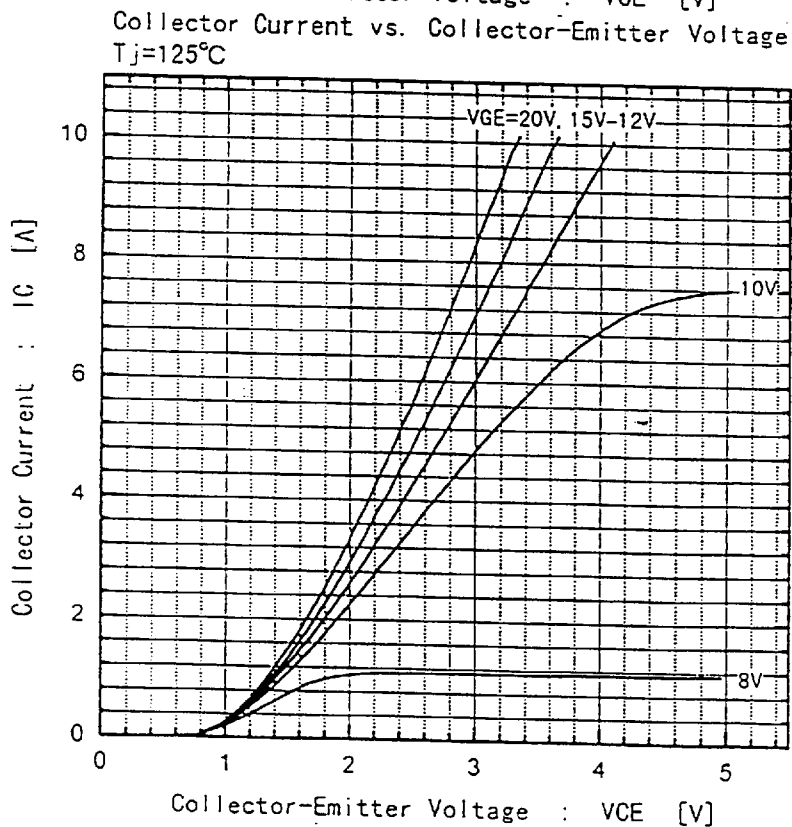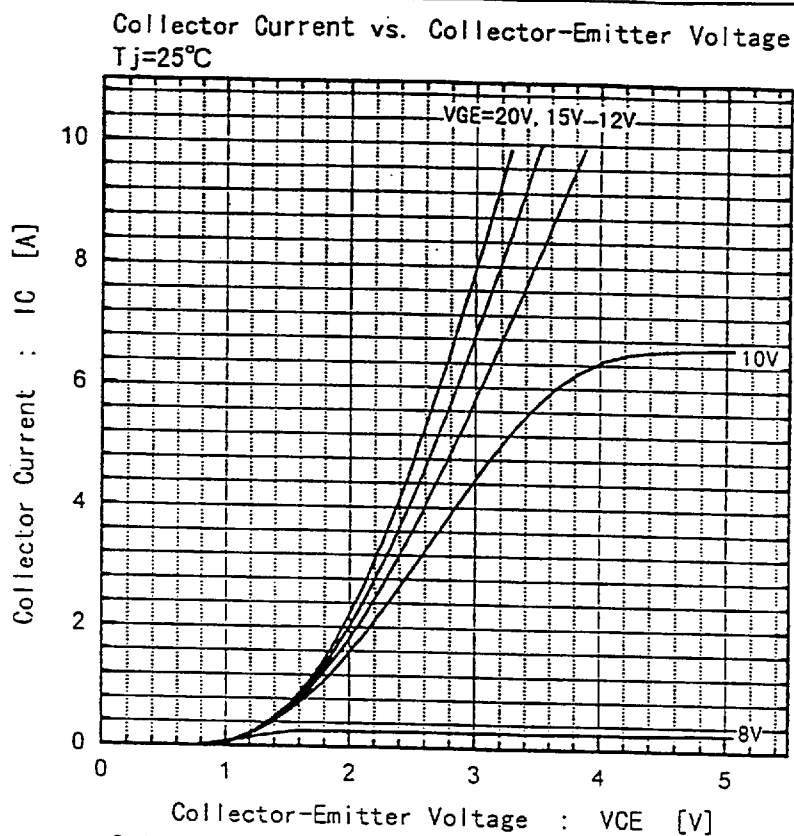

Fuji Electric Co., Ltd.

DWG. NO.

MS5 F 3527


4/10

2238792 0004292 552


H04-004-03

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Collector-Emitter Voltage vs Gate-Emitter Voltage
Tj=25°C

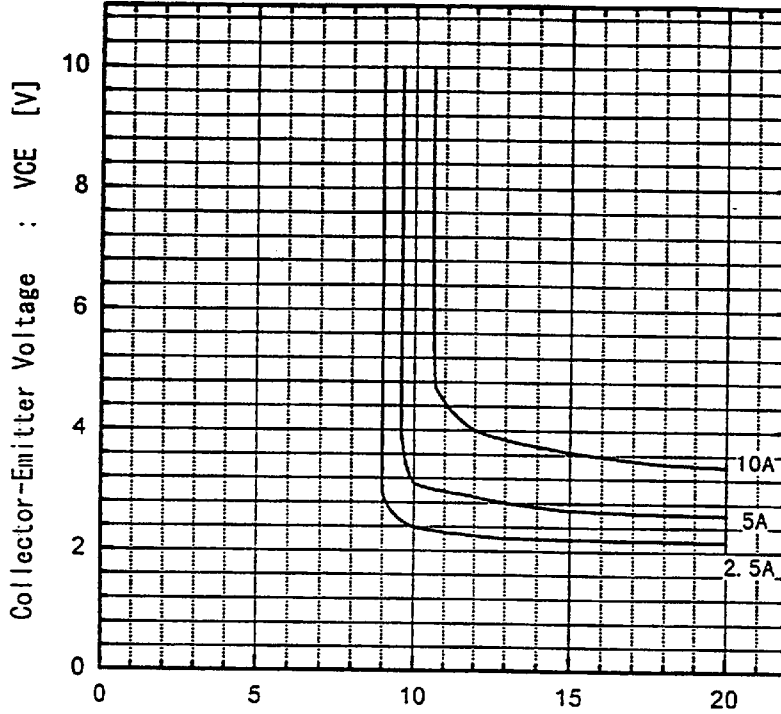

Collector-Emitter Voltage vs Gate-Emitter Voltage
Tj=125°C

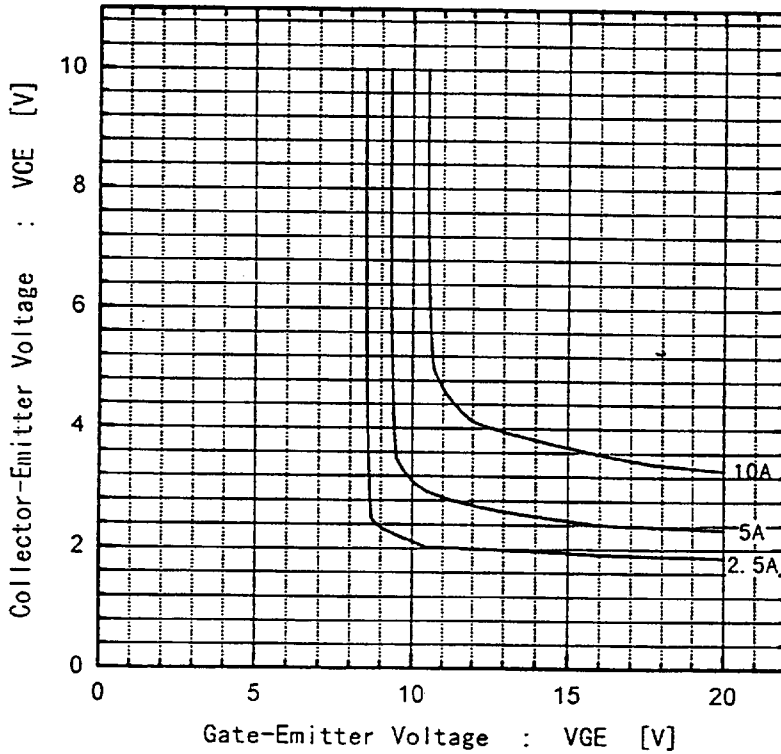

Fuji Electric Co., Ltd.

DWG. NO.

MS5 F3527


5/10

F04-004-03


2238792 0004293 499

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Switching time vs. Collector current
 $V_{cc}=600V$, $R_G=33\Omega$, $V_{GE}=\pm 15V$, $T_j=25^\circ C$

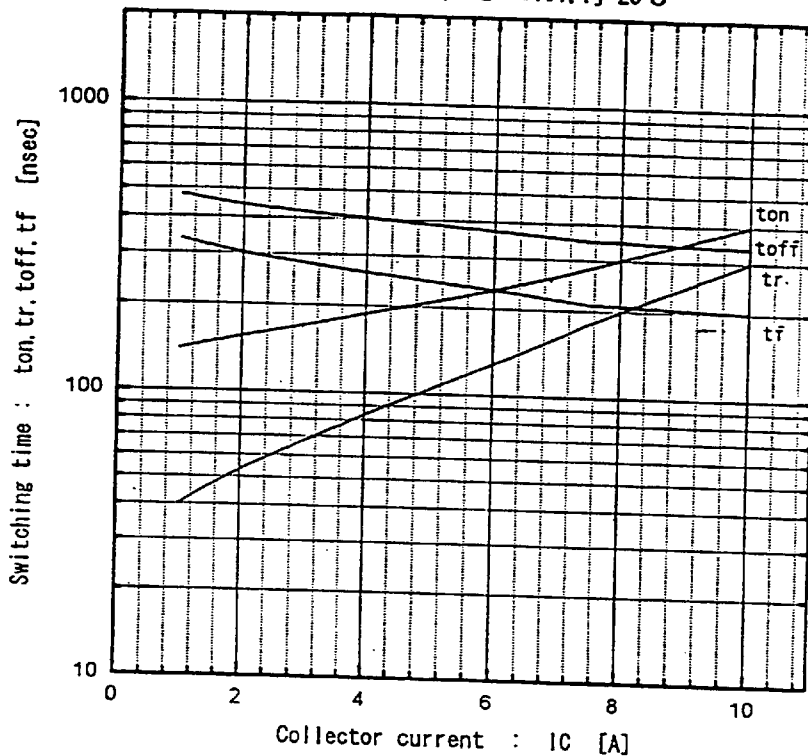

Switching time vs. Collector current
 $V_{cc}=600V$, $R_G=33\Omega$, $V_{GE}=\pm 15V$, $T_j=25^\circ C$

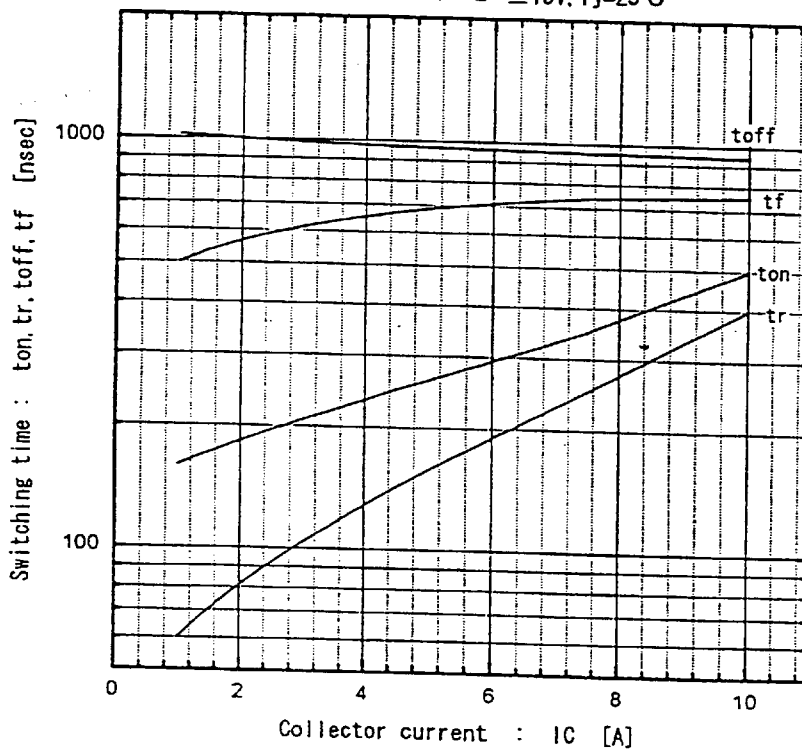

Fuji Electric Co., Ltd.

DWG NO.

MS5 F 3527

6/10


a

2238792 0004294 325


H04-004-03

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Switching time vs. R_G
 $V_{CC}=600V$, $I_C=5A$, $V_{GE}=\pm 15V$, $T_J=25^\circ C$

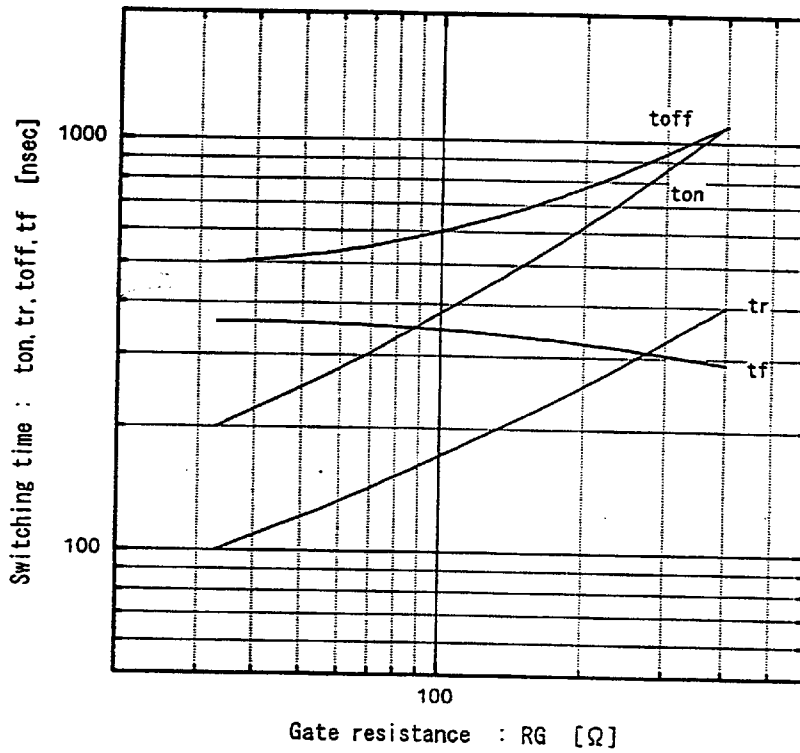

Switching time vs. R_G
 $V_{CC}=600V$, $I_C=5A$, $V_{GE}=\pm 15V$, $T_J=125^\circ C$

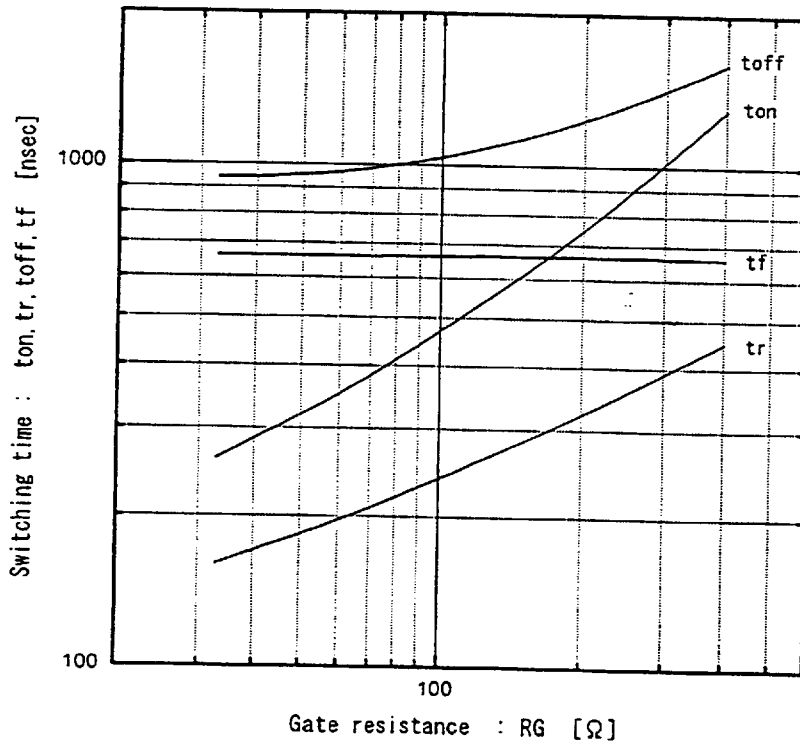

Fuji Electric Co., Ltd.

DWG. NO.

MS5 F 3527

7/10


a	

2238792 0004295 261


H04-004-03

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Dynamic input characteristics Tj=25°C

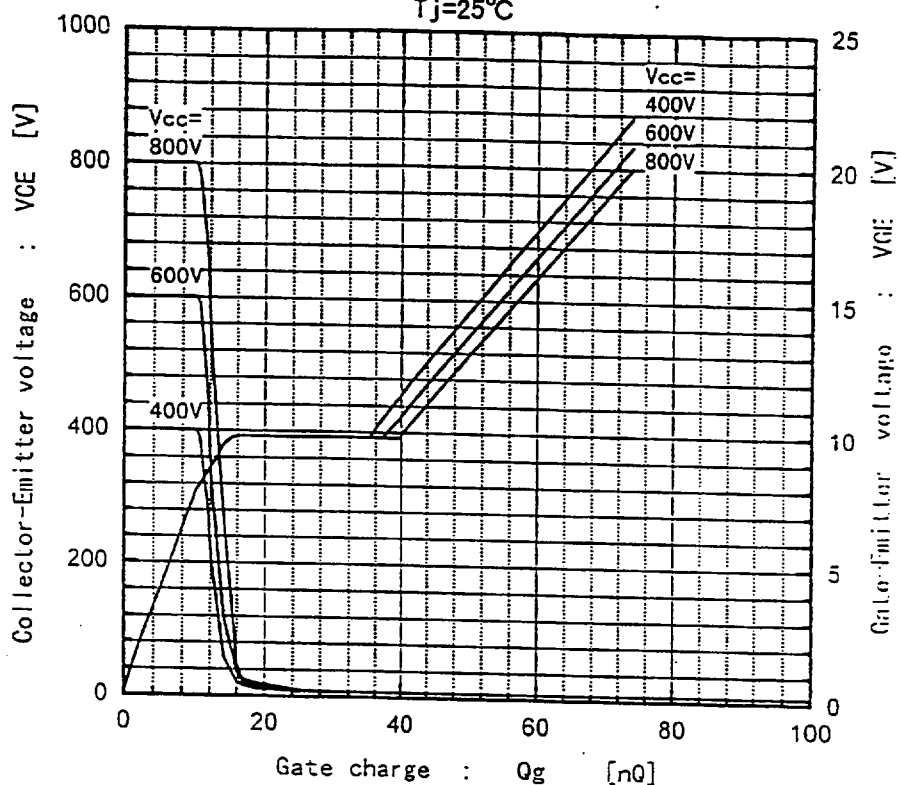

Capacitance vs. Collector-Emitter voltage Tj=25°C

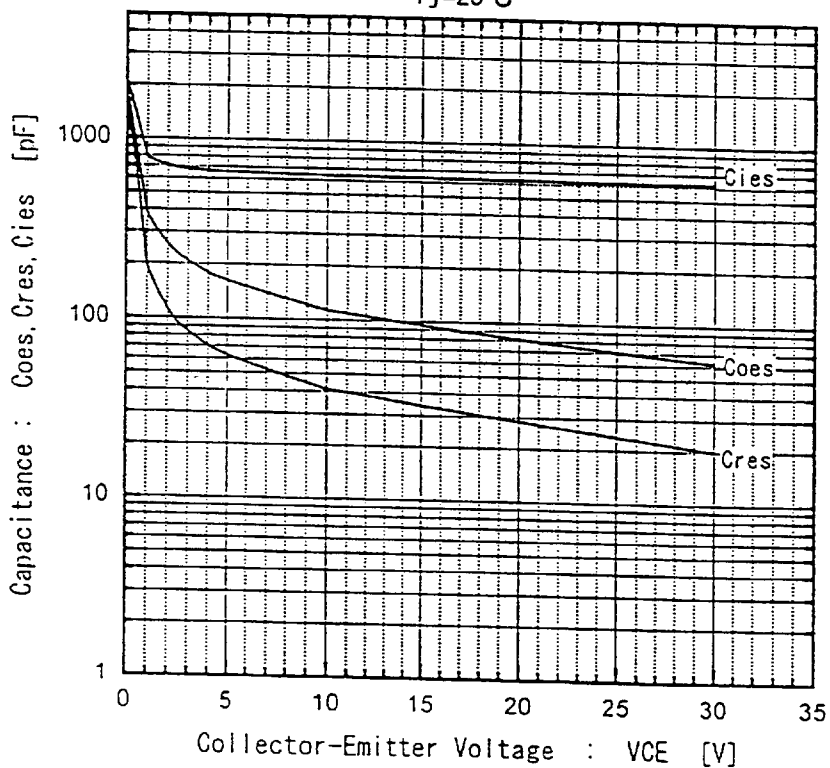

Fuji Electric Co., Ltd.

DWG NO.

MS5 F3527


8/10

2238792 0004296 1T8


H04-004-03

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Reverse Biased Safe Operating Area
 $+V_{GE}=15V, -V_{GE}\leq 15V, T_j\leq 125^\circ C, R_g\geq 33\Omega$

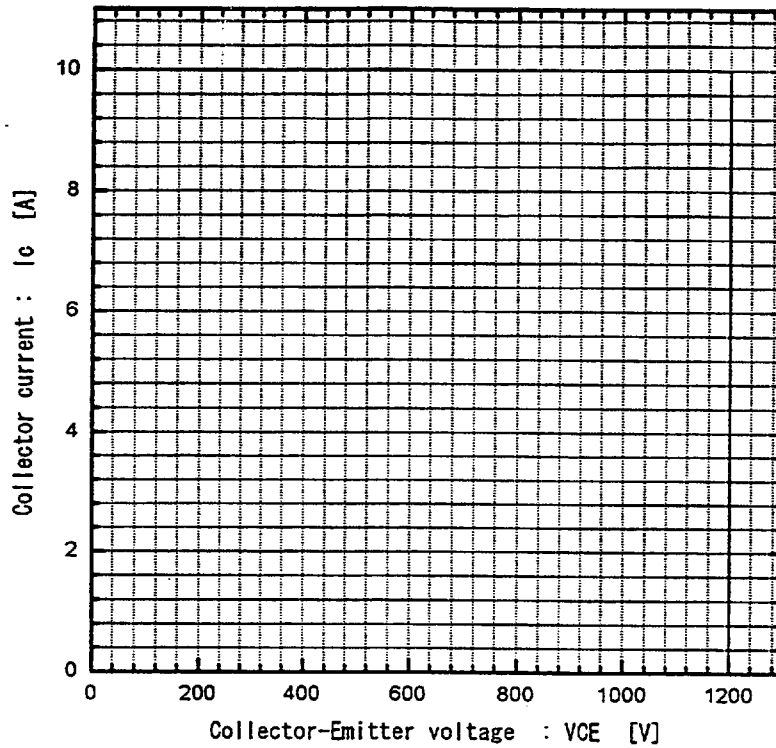

Typical short circuit capability
 $V_{cc}=800V, R_g=33\Omega, T_j=125^\circ C$

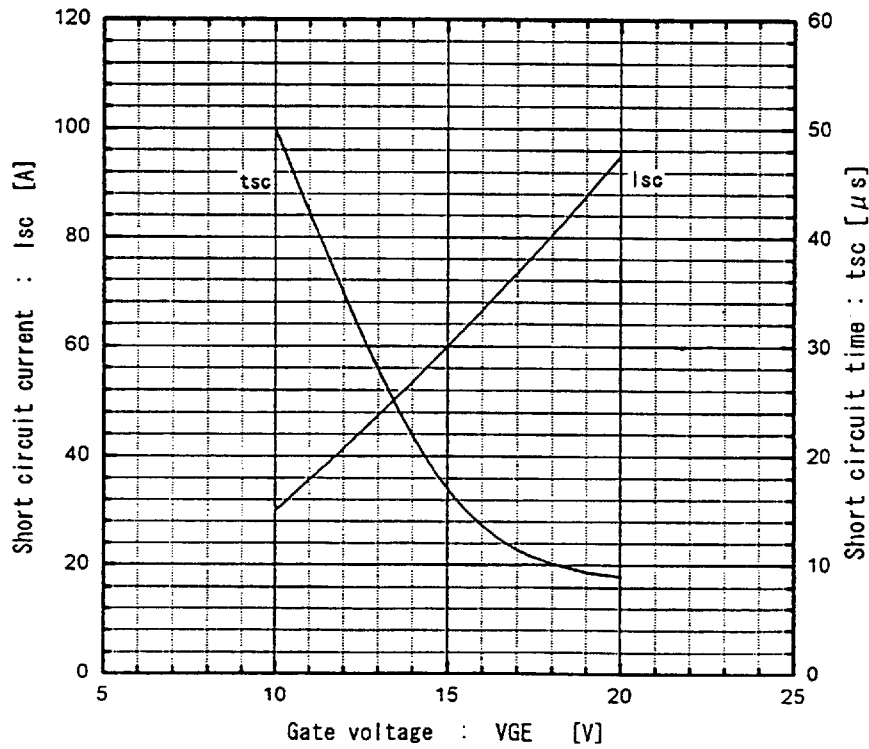

Fuji Electric Co., Ltd.

DWG. NO.

MS5F3527


9/10

~

2238792 0004297 034

H04-004-03

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

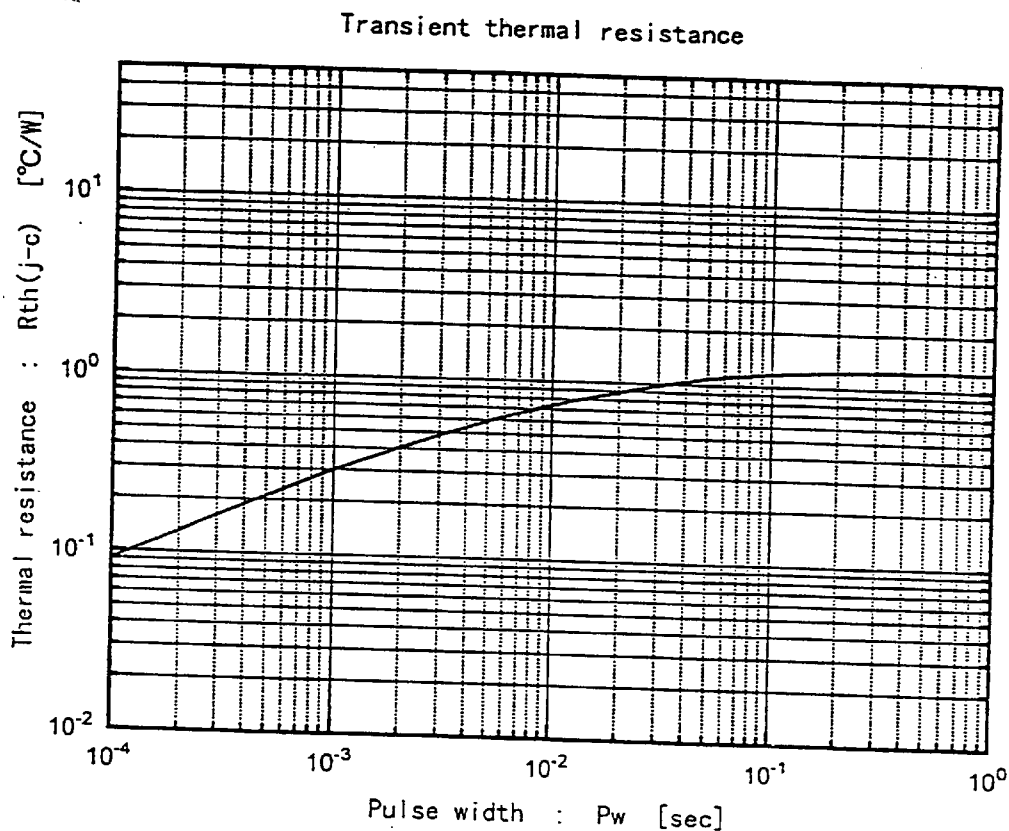

Fuji Electric Co., Ltd.

DWG. NO.

MS5 F 3527

10/10

H04-004-03

2238792 0004298 T70