



2SJ186

SILICON P-CHANNEL MOS FET

HIGH SPEED POWER SWITCHING

FEATURES

- Low On-Resistance
- High Speed Switching
- Low Drive Current
- Suitable for Motor Drive, DC-DC Converter, Power Switch and Solenoid Drive

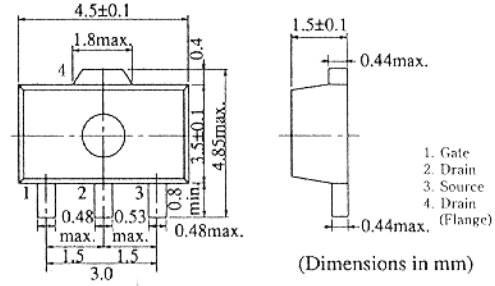

(UPAK)


ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

Item	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	-200	V
Gate-Source Voltage	V_{GSS}	±15	V
Drain Current	I_D	-0.5	A
Drain Peak Current	$I_{D(pulse)}$ *	-1.0	A
Body-Drain Diode	I_{DR}	-0.5	A
Reverse Drain Current			
Channel Dissipation	P_{ch} **	1	W
Channel Temperature	T_{ch}	150	°C
Storage Temperature	T_{stg}	-55 ~ +150	°C

* PW ≤ 10 μs, duty cycle ≤ 1%

** When using the alumina ceramic board (12.5×20×0.7mm)

POWER VS. TEMPERATURE DERATING

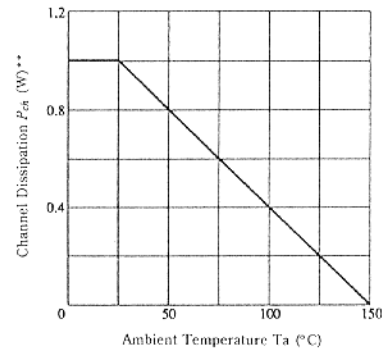


ELECTRICAL CHARACTERISTICS (Ta = 25°C)

Item	Symbol	Test Condition	min.	typ.	max.	Unit
Drain-Source Breakdown Voltage	$V_{(BR) DSS}$	$I_D = -10mA, V_{GS} = 0$	-200	—	—	V
Gate-Source Breakdown Voltage	$V_{(BR) GSS}$	$I_G = \pm 100 \mu A, V_{DS} = 0$	±15	—	—	V
Gate-Source Leak Current	I_{GSS}	$V_{GS} = \pm 12V, V_{DS} = 0$	—	—	±10	μA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -160V, V_{GS} = 0$	—	—	-50	μA
Gate-Source Cutoff Voltage	$V_{GS(off)}$	$I_D = -1mA, V_{DS} = -10V$	-2.0	—	-4.0	V
Static Drain-Source On State Resistance	$R_{DS(on)}$	$I_D = -0.25A, V_{GS} = -10V^*$	—	8.0	12.0	Ω
		$I_D = -1A, V_{GS} = -10V^*$	—	10.0	15.0	
Forward Transfer Admittance	$ y_f $	$I_D = -0.25A, V_{DS} = -10V^*$	0.18	0.3	—	S
Input Capacitance	C_{iss}	$V_{DS} = -10V, V_{GS} = 0, f = 1MHz$	—	75	—	pF
Output Capacitance	C_{oss}		—	32	—	pF
Reverse Transfer Capacitance	C_{rss}		—	5	—	pF
Turn-on Delay Time	$t_{d(on)}$		—	6	—	ns
Rise Time	t_r	$I_D = -0.25A, V_{GS} = 10V, R_L = 120 \Omega$	—	6	—	ns
Turn-off Delay Time	$t_{d(off)}$		—	17	—	ns
Fall Time	t_f		—	15	—	ns
Body-Drain Diode Forward Voltage	V_{DF}	$I_F = -0.5A, V_{GS} = 0$	—	0.95	—	V
Body-Drain Diode Reverse Recovery Time	t_{rr}	$I_F = -0.5A, V_{GS} = 0, di_F/dt = 50A/\mu s$	—	100	—	ns


* Pulse Test

Marking for 2SJ186 is "CY".


MAXIMUM SAFE OPERATION AREA

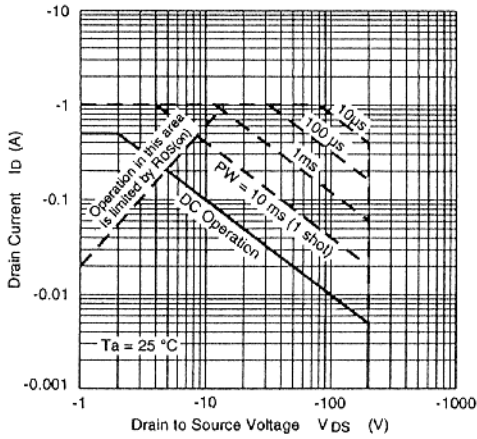


TYPICAL OUTPUT CHARACTERISTICS

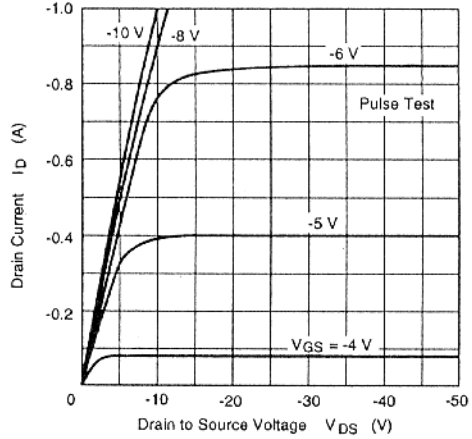


TYPICAL TRANSFER CHARACTERISTICS

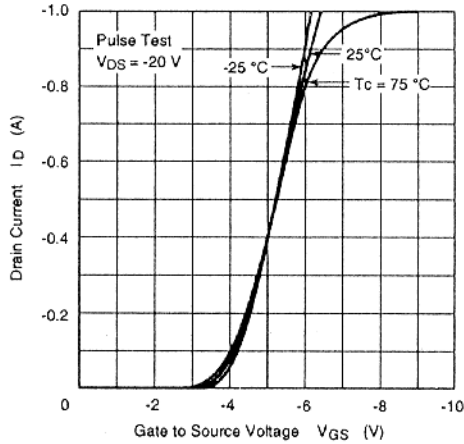


DRAIN TO SOURCE SATURATION VOLTAGE VS. GATE TO SOURCE VOLTAGE

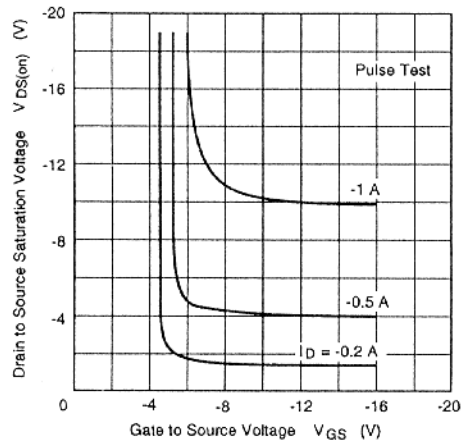


STATIC DRAIN TO SOURCE ON STATE RESISTANCE VS. DRAIN CURRENT

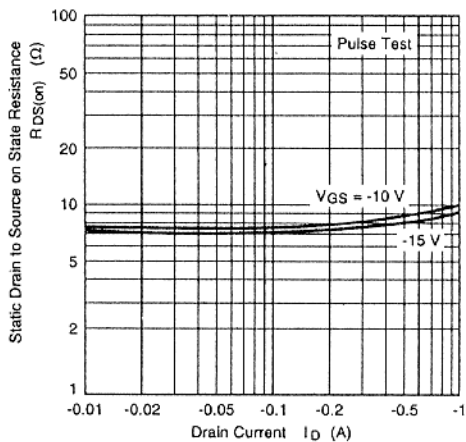


STATIC DRAIN TO SOURCE ON STATE RESISTANCE VS. CASE TEMPERATURE

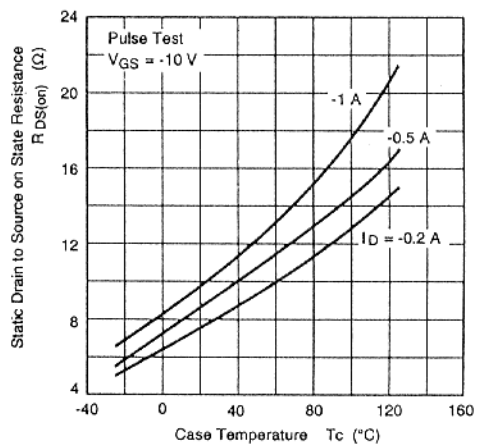


FORWARD TRANSFER ADMITTANCE VS. DRAIN CURRENT

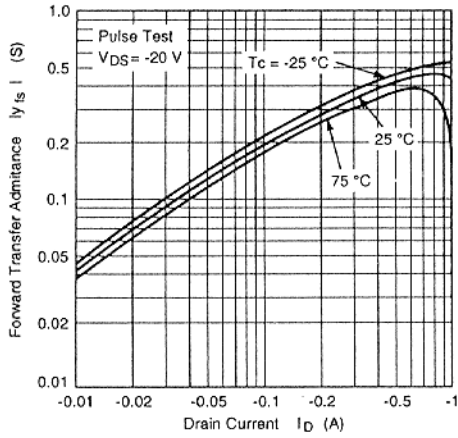


BODY - DRAIN DIODE REVERSE RECOVERY TIME

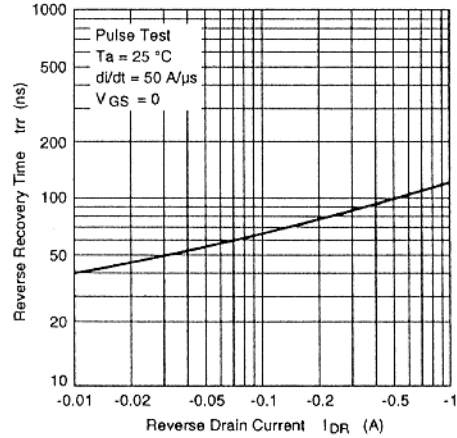


CAPACITANCE VS. DRAIN TO SOURCE VOLTAGE

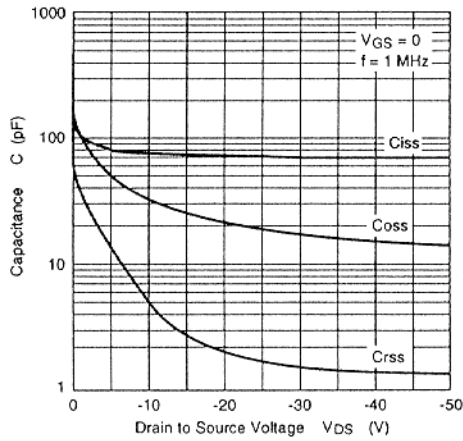

DYNAMIC INPUT CHARACTERISTICS

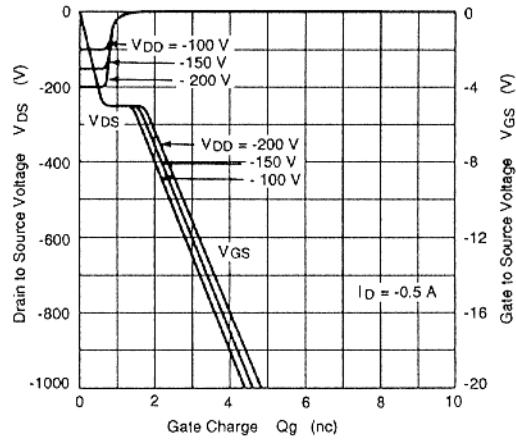

SWITCHING CHARACTERISTICS

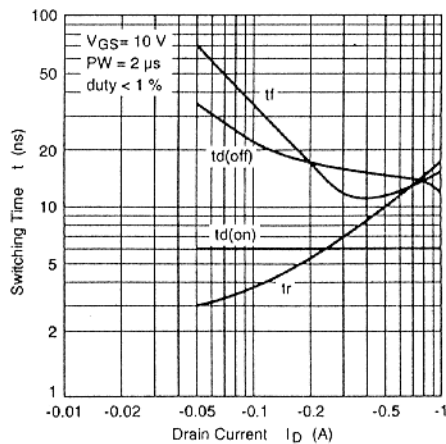

REVERSE DRAIN CURRENT VS. SOURCE TO DRAIN VOLTAGE

