

2SJ386

Silicon P Channel MOS FET

Application

High speed power switching

Features

- Low on-resistance
- High speed switching
- Low drive current
- 4 V gate drive device can be driven from 5 V source
- Suitable for Switching regulator, DC – DC converter

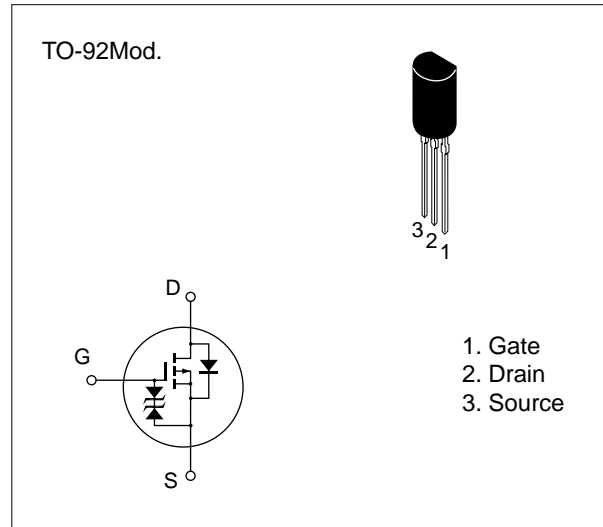


Table 1 Absolute Maximum Ratings (Ta = 25°C)

| Item | Symbol | Ratings | Unit |
|--|------------------|-------------|------|
| Drain to source voltage | V_{DSS} | -30 | V |
| Gate to source voltage | V_{GSS} | ±20 | V |
| Drain current | I_D | -3 | A |
| Drain peak current | $I_{D(pulse)^*}$ | -5 | A |
| Body-drain diode reverse drain current | I_{DR} | -3 | A |
| Channel dissipation | Pch | 0.9 | W |
| Channel temperature | Tch | 150 | °C |
| Storage temperature | Tstg | -55 to +150 | °C |

* $PW \leq 10 \mu s$, duty cycle $\leq 1 \%$

Table 2 Electrical Characteristics (Ta = 25°C)

| Item | Symbol | Min | Typ | Max | Unit | Test conditions |
|--|---------------|----------|------|----------|---------------|--|
| Drain to source breakdown voltage | $V_{(BR)DSS}$ | -30 | — | — | V | $I_D = -10 \text{ mA}$, $V_{GS} = 0$ |
| Gate to source breakdown voltage | $V_{(BR)GSS}$ | ± 20 | — | — | V | $I_G = \pm 100 \text{ }\mu\text{A}$, $V_{DS} = 0$ |
| Gate to source leak current | I_{GSS} | — | — | ± 10 | μA | $V_{GS} = \pm 16 \text{ V}$, $V_{DS} = 0$ |
| Zero gate voltage drain current | I_{DSS} | — | — | -10 | μA | $V_{DS} = -24 \text{ V}$, $V_{GS} = 0$ |
| Gate to source cutoff voltage | $V_{GS(off)}$ | -1.0 | — | -2.5 | V | $I_D = -1 \text{ mA}$, $V_{DS} = -10 \text{ V}$ |
| Static drain to source on state resistance | $R_{DS(on)}$ | — | 0.3 | 0.4 | Ω | $I_D = -2 \text{ A}$ $V_{GS} = -10 \text{ V}^*$ |
| | | — | 0.55 | 0.8 | Ω | $I_D = -2 \text{ A}$ $V_{GS} = -4 \text{ V}^*$ |
| Forward transfer admittance | $ y_{fs} $ | 1.0 | 1.7 | — | S | $I_D = -1 \text{ A}$ $V_{DS} = -10 \text{ V}^*$ |
| Input capacitance | C_{iss} | — | 177 | — | pF | $V_{DS} = -10 \text{ V}$ |
| Output capacitance | C_{oss} | — | 120 | — | pF | $V_{GS} = 0$ |
| Reverse transfer capacitance | C_{rss} | — | 59 | — | pF | $f = 1 \text{ MHz}$ |
| Turn-on delay time | $t_{d(on)}$ | — | 8 | — | ns | $I_D = -2 \text{ A}$ |
| Rise time | t_r | — | 28 | — | ns | $V_{GS} = -10 \text{ V}$ |
| Turn-off delay time | $t_{d(off)}$ | — | 45 | — | ns | $R_L = 15 \text{ }\Omega$ |
| Fall time | t_f | — | 60 | — | ns | |

