


CI Module


Single Phase Converter +
Three Phase Inverter
10 Amperes/600 Volts

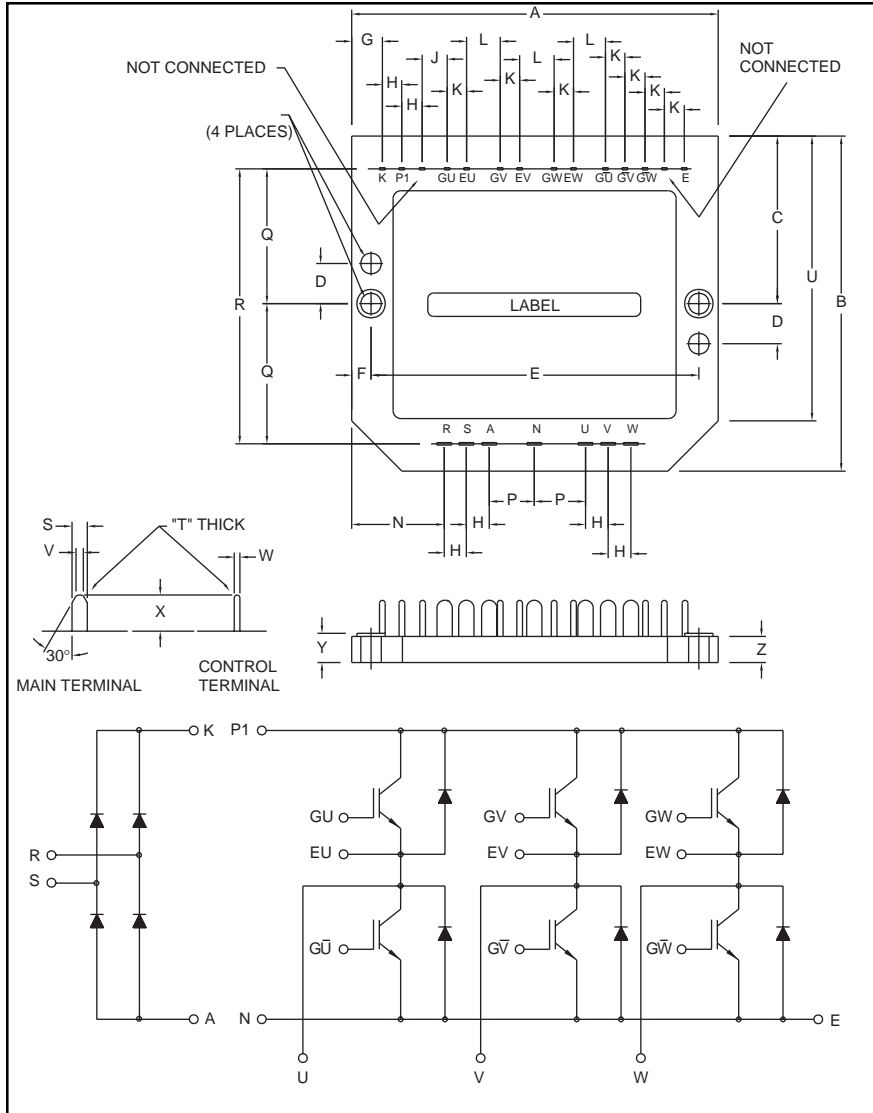

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	3.54	90.0
B	2.52	64.0
C	1.26	32.0
D	0.35	9.0
E	3.15	80.0
F	0.20	5.0
G	0.30	7.5
H	0.32	8.0
J	0.48	12.28
K	0.10	2.54
L	0.30	7.62
M	0.19	4.8

Dimensions	Inches	Millimeters
N	0.65	16.5
P	0.49	12.5
Q	1.04	26.5
R	2.09	53.0
S	0.08	2.0
T	0.02	0.5
U	2.13	54.0
V	0.04	1.0
W	0.03	0.8
X	0.32	8.0
Y	0.21	5.3
Z	0.20	5.0

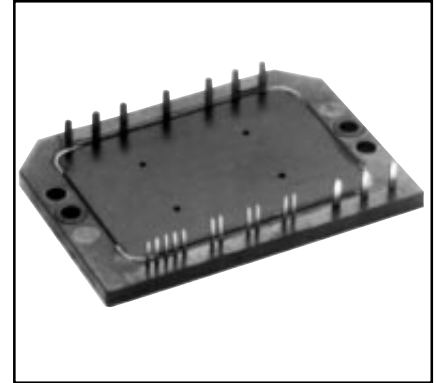

Description:

Powerex CI Modules are designed for use in switching applications. Each module consists of a single phase diode converter section and a three phase IGBT inverter section. All components and interconnects are isolated from the heat sinking baseplate, offering simplified system assembly and thermal management.

Features:

- Low Drive Power
- Low $V_{CE(sat)}$
- Discrete Super-Fast Recovery (70ns) Free-Wheel Diodes
- High Frequency Operation (20-25 kHz)
- Isolated Baseplate for Easy Heat Sinking

Applications:

- AC Motor Control
- Motion/Servo Control
- General Purpose Inverters
- Robotics

Ordering Information:

Example: Select the complete nine digit module part number you desire from the table below - i.e. CM10MD3-12H is a 600V (V_{CES}), 10 Ampere CI Power Module.

Type	Current Rating Amperes	V_{CES} Volts (x 50)
CM	10	12

CM10MD3-12H

CI Module

Single Phase Converter + Three Phase Inverter

10 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	CM10MD3-12H	Units
Power Device Junction Temperature	T_j	-40 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Mounting Torque, M4 Mounting Screws	—	13	in-lb
Module Weight (Typical)	—	60	Grams
Isolation Voltage, AC 1 minute, 60Hz	V_{RMS}	2500	Volts
Converter Sector			
Repetitive Peak Reverse Voltage	V_{RRM}	800	Volts
Recommended AC Input Voltage	E_a	220	Volts
DC Output Current	I_O	15	Amperes
Surge (Non-repetitive) Forward Current	I_{FSM}	300	Amperes
I^2t for Fusing	I^2t	375	A^2s
IGBT Inverter Sector			
Collector-Emitter Voltage (G-E Short)	V_{CES}	600	Volts
Gate-Emitter Voltage (C-E Short)	V_{GES}	± 20	Volts
Collector Current	I_C	10	Amperes
Collector Current (Pulse)*	I_{CM}	20	Amperes
Emitter Current**	I_E	10	Amperes
Emitter Current** (Pulse)*	I_{EM}	20	Amperes
Maximum Collector Dissipation	P_C	36	Watts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Converter Sector						
Repetitive Reverse Current	I_{RRM}	$V_R = V_{\text{RRM}}, T_j = 150^\circ\text{C}$	—	—	8	mA
Forward Voltage Drop	V_{FM}	$I_F = 25\text{A}$	—	—	1.6	Volts
Thermal Resistance (Junction-to-Fin)	$R_{\text{th(j-f)}}$	Per Diode	—	—	3.6	$^\circ\text{C/W}$
IGBT Inverter Sector						
Collector Cutoff Current	I_{CES}	$V_{\text{CE}} = V_{\text{CES}}, V_{\text{GE}} = 0\text{V}$	—	—	1	mA
Gate-Emitter Threshold Voltage	$V_{\text{GE(th)}}$	$V_{\text{CE}} = 10\text{V}, I_C = 1\text{mA}$	4.5	6.0	7.5	Volts
Gate-Emitter Cutoff Current	I_{GES}	$V_{\text{GE}} = V_{\text{GES}}, V_{\text{CE}} = 0\text{V}$	—	—	0.5	μA
Collector-Emitter Saturation Voltage	$V_{\text{CE(sat)}}$	$V_{\text{GE}} = 15\text{V}, I_C = 10\text{A}, T_j = 25^\circ\text{C}$	—	2.1	2.8	Volts
		$V_{\text{GE}} = 15\text{V}, I_C = 10\text{A}, T_j = 150^\circ\text{C}$	—	2.15	—	Volts
Input Capacitance	C_{ies}		—	—	1.0	nF
Output Capacitance	C_{oes}	$V_{\text{GE}} = 0\text{V}, V_{\text{CE}} = 10\text{V}$	—	—	0.9	nF
Reverse Transfer Capacitance	C_{res}		—	—	0.2	nF
Total Gate Charge	Q_G	$V_{\text{CC}} = 300\text{V}, I_C = 10\text{A}, V_{\text{GE}} = 15\text{V}$	—	30	—	nC
Resistive Load	Turn-on Delay Time	$V_{\text{GE}1} = V_{\text{GE}2} = 15\text{V},$ $V_{\text{CC}} = 300\text{V}, I_C = 10\text{A},$ $R_g = 63\Omega,$	—	—	120	nS
	Rise Time		—	—	300	nS
Switching Times	Turn-off Delay Time	Resistive Load	—	—	200	nS
	Fall Time		—	—	300	nS
Emitter-Collector Voltage	V_{EC}	$I_E = 10\text{A}, V_{\text{GE}} = 0\text{V}$	—	—	2.8	Volts
Reverse Recovery Time	t_{rr}	$I_E = 10\text{A}, V_{\text{GE}} = 0\text{V},$	—	—	110	nS
Reverse Recovery Charge	Q_{rr}	$di_E/dt = -20\text{A}/\mu\text{s}$	—	0.03	—	μC
Thermal Resistance (Junction-to-Fin)	$R_{\text{th(j-f)}}$	Per IGBT	—	—	3.5	$^\circ\text{C/W}$
		Per FWDi	—	—	4.0	$^\circ\text{C/W}$


* Pulse width and repetition rate should be such that device junction temperature does not exceed maximum rating.

** Characteristics of the anti-parallel emitter-collector free-wheel diode.



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

CM10MD3-12H
CI Module
Single Phase Converter + Three Phase Inverter
10 Amperes/600 Volts

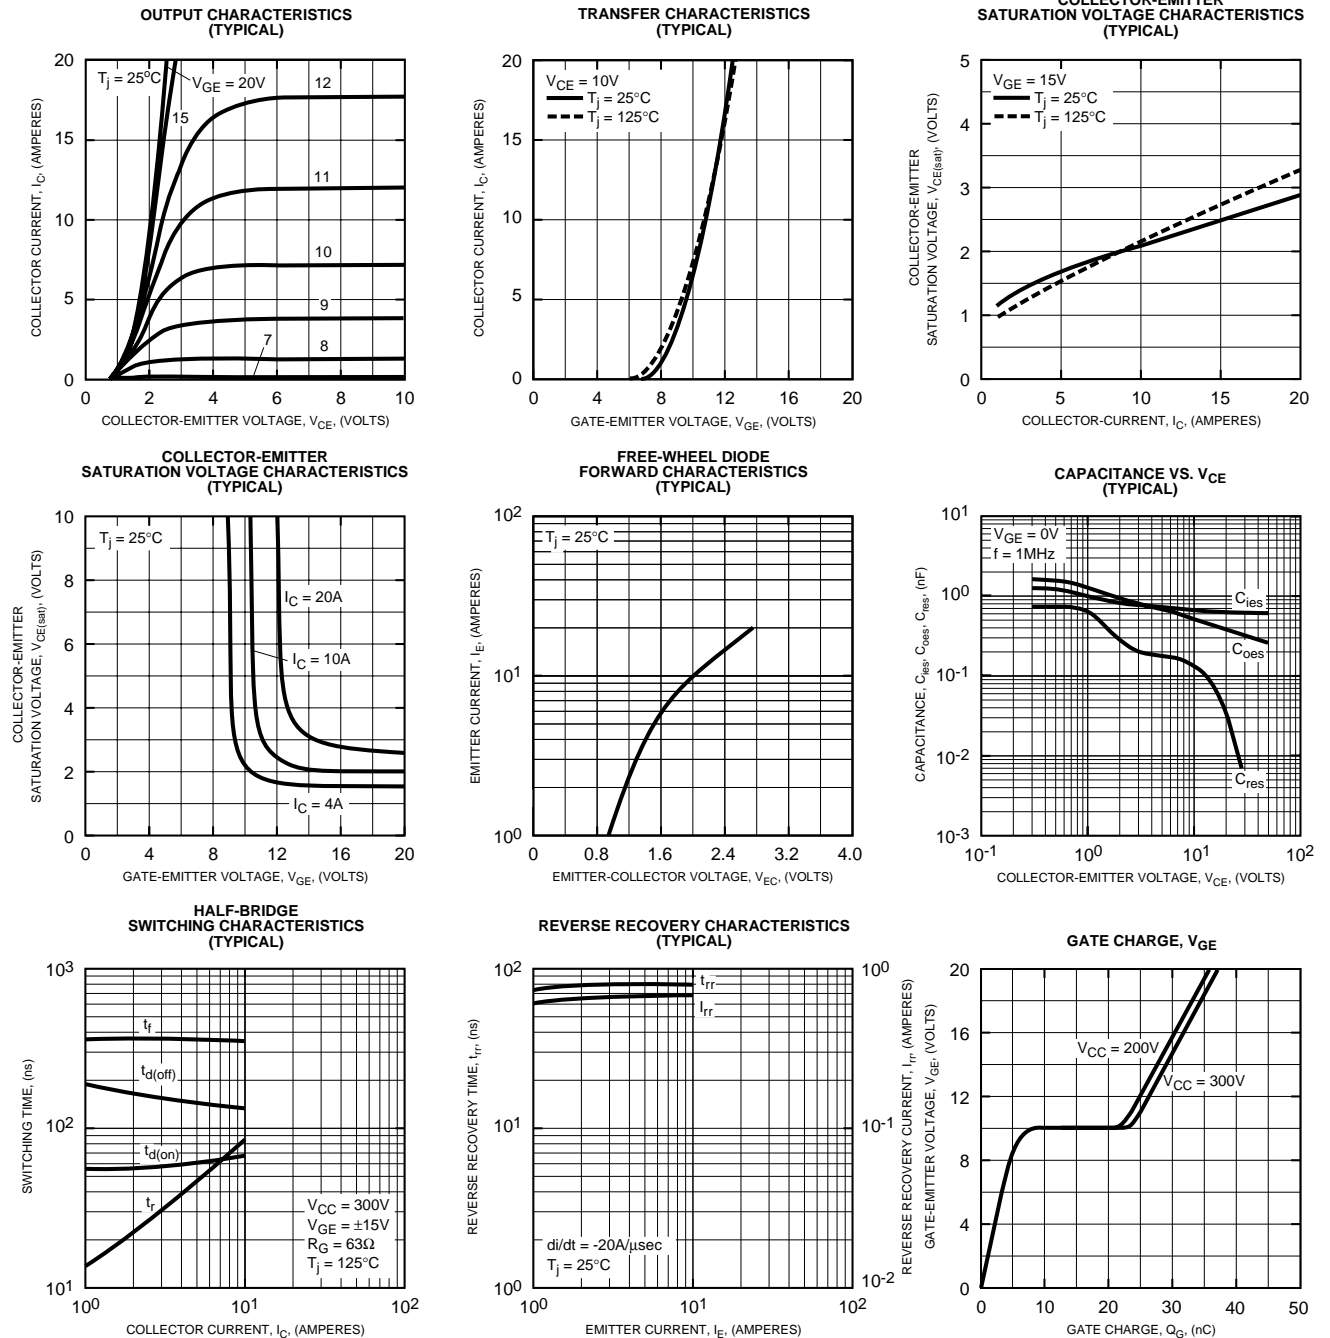





Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

CM10MD3-12H

CI Module

Single Phase Converter + Three Phase Inverter

10 Amperes/600 Volts

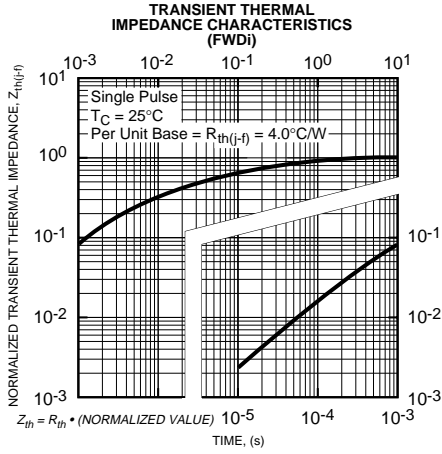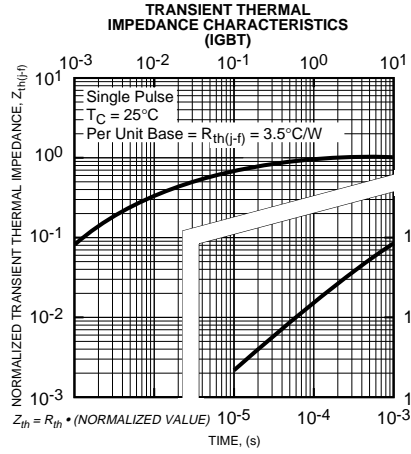



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.