


Dual IGBTMOD™ H-Series Module 150 Amperes/1400 Volts

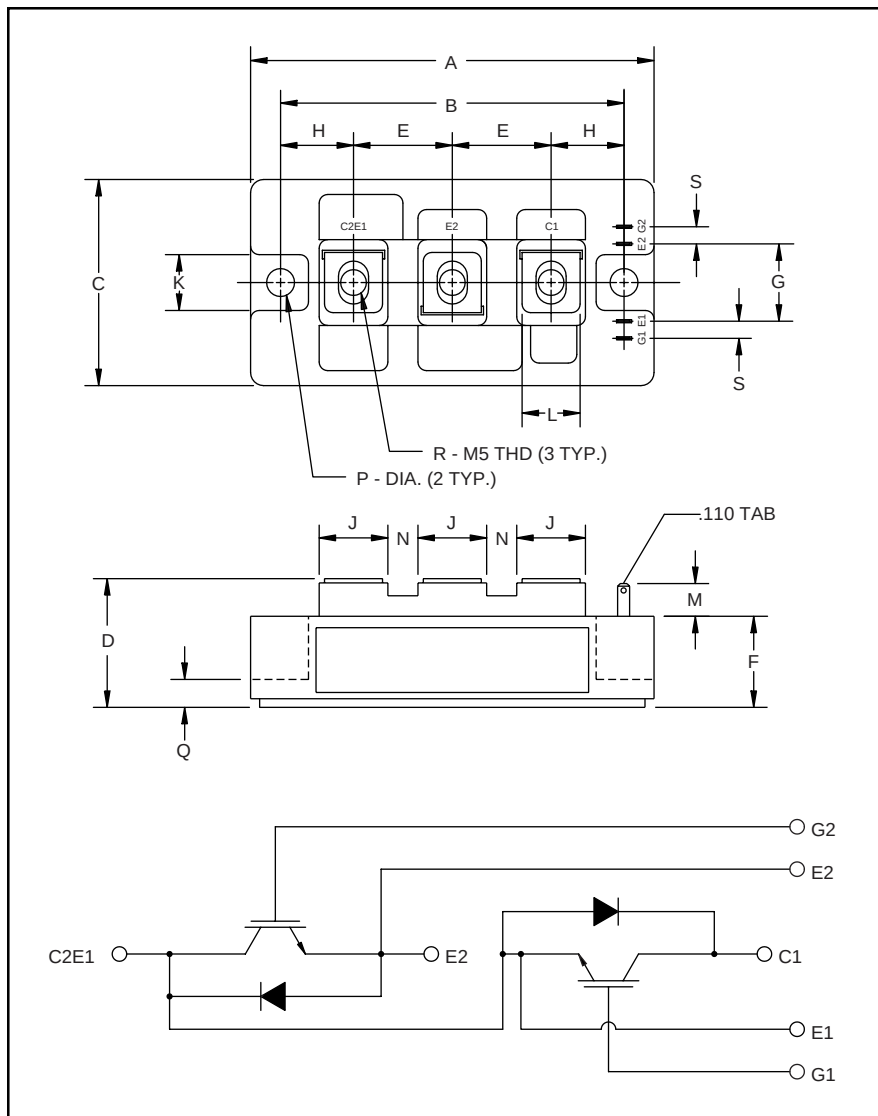

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	3.70	94.0
B	3.150±0.01	80.0±0.25
C	1.89	48.0
D	1.18 Max.	30.0 Max.
E	0.90	23.0
F	0.83	21.2
G	0.71	18.0
H	0.67	17.0
J	0.63	16.0

Dimensions	Inches	Millimeters
K	0.51	13.0
L	0.47	12.0
M	0.30	7.5
N	0.28	7.0
P	0.256 Dia.	Dia. 6.5
Q	0.26	6.5
R	M5 Metric	M5
S	0.16	4.0



Description:

Powerex IGBTMOD™ Modules are designed for use in switching applications. Each module consists of two IGBT Transistors in a half-bridge configuration with each transistor having a reverse-connected super-fast recovery free-wheel diode. All components and interconnects are isolated from the heat sinking baseplate, offering simplified system assembly and thermal management.

Features:

- ☐ Low Drive Power
- ☐ Low $V_{CE(sat)}$
- ☐ Discrete Super-Fast Recovery (135ns) Free Wheel Diode
- ☐ High Frequency Operation (20-25kHz)
- ☐ Isolated Baseplate for Easy Heat Sinking

Applications:

- ☐ AC Motor Control
- ☐ Motion/Servo Control
- ☐ UPS
- ☐ Welding Power Supplies
- ☐ Laser Power Supplies

Ordering Information:

Example: Select the complete part module number you desire from the table below -i.e. CM150DY-28H is a 1400V (V_{CES}), 150 Ampere Dual IGBTMOD™ Power Module.

Type	Current Rating Amperes	V_{CES} Volts (x 50)
CM	150	28

CM150DY-28H
Dual IGBTMOD™ H-Series Module
 150 Amperes/1400 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Ratings	Symbol	CM150DY-28H	Units
Junction Temperature	T_j	-40 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Collector-Emitter Voltage (G-E SHORT)	V_{CES}	1400	Volts
Gate-Emitter Voltage (C-E SHORT)	V_{GES}	± 20	Volts
Collector Current	I_C	150	Amperes
Peak Collector Current	I_{CM}	300**	Amperes
Emitter Current	I_E^*	150	Amperes
Emitter Current-Pulse	I_{EM}^*	300**	Amperes
Maximum Collector Dissipation	P_C	1100***	Watts
Max. Mounting Torque M5 Terminal Screws	—	17	in-lb
Max. Mounting Torque M6 Mounting Screws	—	26	in-lb
Module Weight (Typical)	—	270	Grams
V Isolation	V_{RMS}	2500	Volts

* I_E , V_{EC} , T_{rr} , Q_{rr} & di_E/dt represent characteristics of the anti-parallel, emitter to collector free-wheel diode (FWDi).

** Pulse width and repetition rate should be such that the device junction temp. (T_j) does not exceed $T_{j(max)}$ rating.

*** Junction temperature (T_j) should not increase beyond 150°C .

Static Electrical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Cutoff Current	I_{CES}	$V_{CE} = V_{CES}$, $V_{GE} = 0V$	—	—	1.0	mA
Gate Leakage Current	I_{GES}	$V_{GE} = V_{GES}$, $V_{CE} = 0V$	—	—	0.5	μA
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$I_C = 15mA$, $V_{CE} = 10V$	5.0	6.5	8.0	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 150A$, $V_{GE} = 15V$	—	3.1	4.2*	Volts
		$I_C = 150A$, $V_{GE} = 15V$, $T_j = 125^\circ\text{C}$	—	2.95	—	Volts
Total Gate Charge	Q_G	$V_{CC} = 800V$, $I_C = 150A$, $V_{GE} = 15V$	—	765	—	nC

* Pulse width and repetition rate should be such that device junction temperature rise is negligible.

Dynamic Electrical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Input Capacitance	C_{ies}	$V_{GE} = 0V$, $V_{CE} = 10V$	—	—	30	nF
Output Capacitance	C_{oes}		—	—	10.5	nF
Reverse Transfer Capacitance	C_{res}		—	—	6	nF
Resistive	Turn-on Delay Time	$V_{CC} = 800V$, $I_C = 150A$, $V_{GE1} = V_{GE2} = 15V$, $R_G = 2.1\Omega$	—	—	250	ns
Load	Rise Time		—	—	400	ns
Switching	Turn-off Delay Time		—	—	300	ns
Times	Fall Time		—	—	500	ns
Diode Reverse Recovery Time	t_{rr}	$I_E = 150A$, $di_E/dt = -300A/\mu s$	—	—	300	ns
Emitter-Collector Voltage	V_{EC}	$I_E = 150A$, $V_{GE} = 0V$	—	—	3.8	V
Diode Reverse Recovery Charge	Q_{rr}	$I_E = 150A$, $di_E/dt = -300A/\mu s$	—	1.5	—	μC










Thermal and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Junction to Case	$R_{th(j-c)}$	Per IGBT	—	—	0.11	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	$R_{th(j-c)}$	Per FWDi	—	—	0.24	$^\circ\text{C/W}$
Contact Thermal Resistance	$R_{th(c-f)}$	Per Module, Thermal Grease Applied	—	—	0.13	$^\circ\text{C/W}$


CM150DY-28H

Dual IGBTMOD™ H-Series Module

150 Amperes/1400 Volts

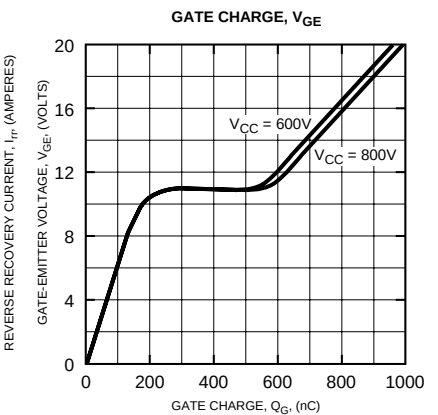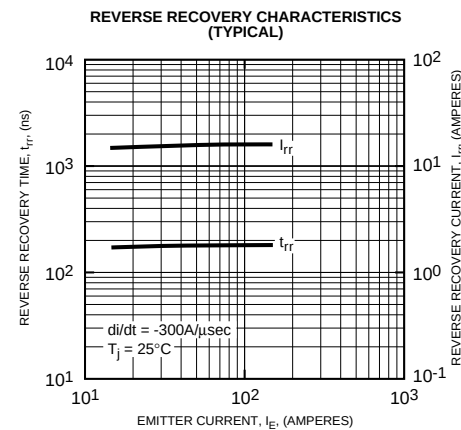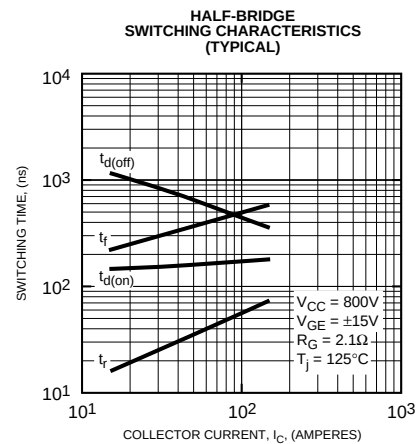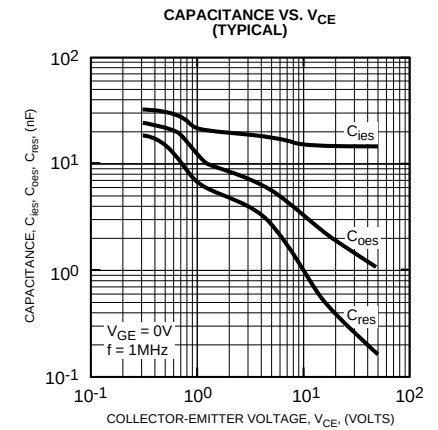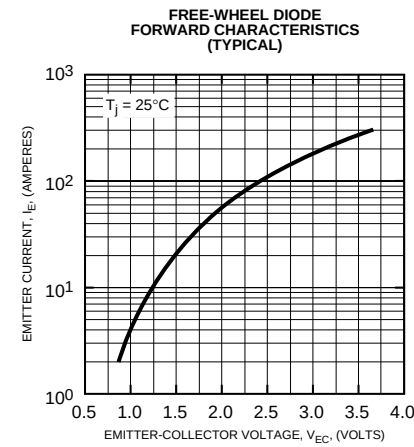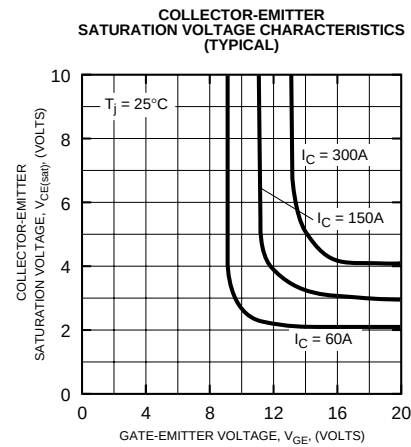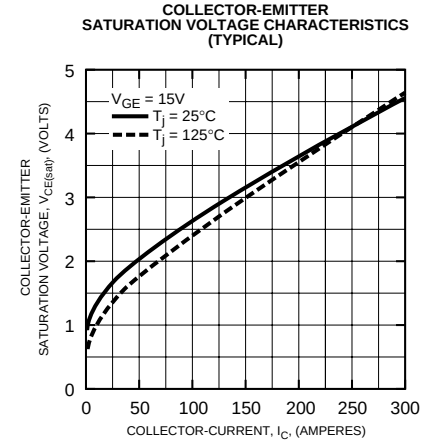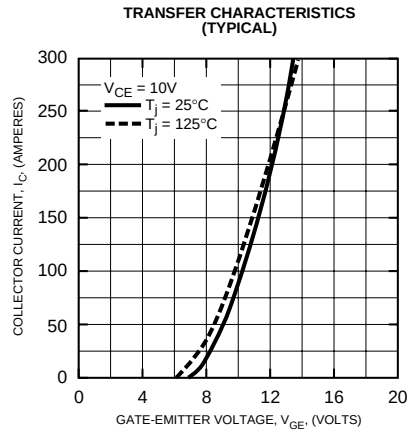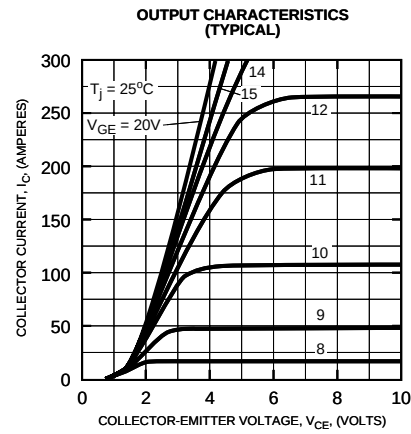

CM150DY-28H
Dual IGBTMOD™ H-Series Module
 150 Amperes/1400 Volts

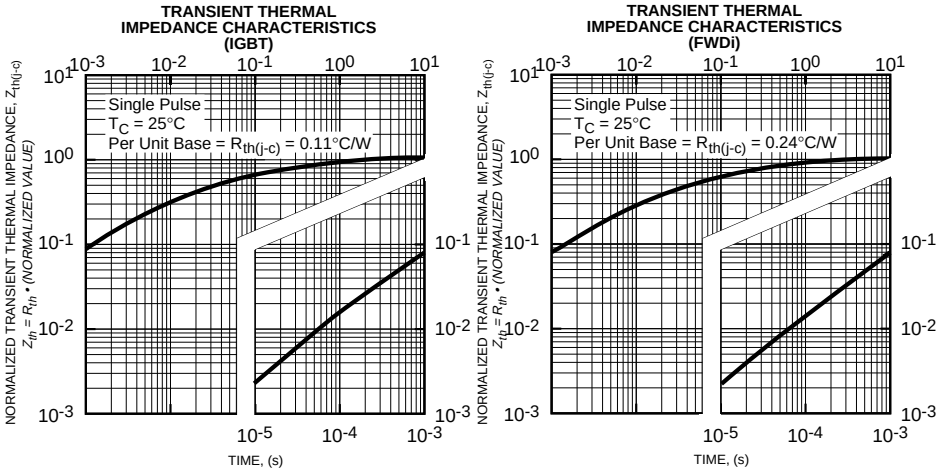



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.