



Specifications

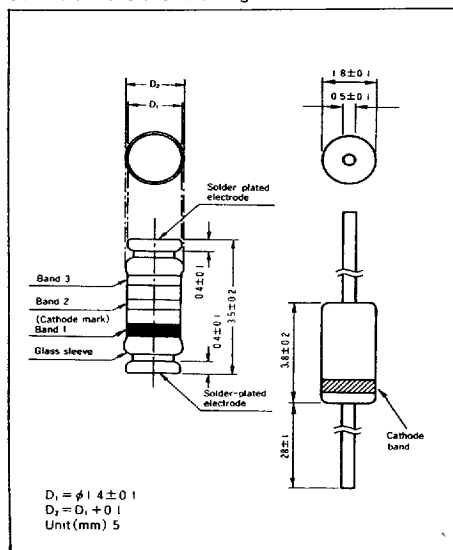

Basic characteristics

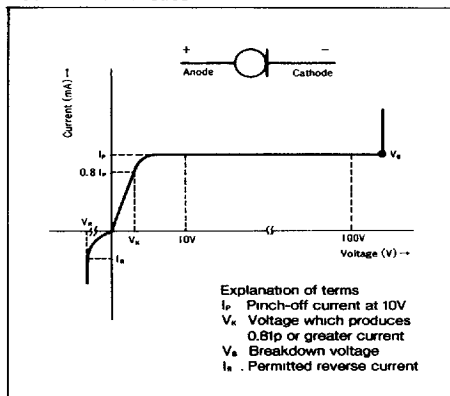

Maximum ratings

Type	E type	F type
Power	300mW	400mW
thermal resistance	300°C/W	150°C/W
Maximum rating voltage	100V	
Reverse current	50mA	
Temperature	-30°C~150°C	


Type		Pinch-off current ^{*1}		Limiting current ^{*2}		Dynamic impedance	Limiting current ratio	Temperature coefficient ^{*4}	Indication
lead less	lead	Test voltage	I_p [mA]	V_{cs} [V]	I_{cs} [mA]				
F-101L	E-101L	10V	0.01~0.06	0.4	min0.81,	8.00	max 1:1	+2.1~-+0.10	1L
F-101	E-101	10V	0.05~0.21	0.5	min0.81,	6.00	max 1:1	+2.1~-+0.10	01
F-301	E-301	10V	0.20~0.42	0.8	min0.81,	4.00	max 1:1	+0.4~-0.20	03
F-501	E-501	10V	0.40~0.63	1.1	min0.81,	2.00	max 1:1	+0.1~-0.25	05
F-701	E-701	10V	0.60~0.92	1.4	min0.81,	1.00	max 1:1	0.0~-0.32	07
F-102	E-102	10V	0.88~1.32	1.7	min0.81,	0.65	max 1:1	-0.1~-0.37	10
F-152	E-152	10V	1.28~1.72	2.0	min0.81,	0.40	max 1:1	-0.1~-0.40	15
F-202	E-202	10V	1.68~2.32	2.3	min0.81,	0.25	max 1:1	-0.1~-0.42	20
F-272	E-272	10V	2.28~3.10	2.7	min0.81,	0.15	max 1:1	-0.1~-0.45	27
F-352	E-352	10V	3.00~4.10	3.2	min0.81,	0.10	max 1:1	-0.2~-0.47	35
F-452	E-452	10V	3.90~5.10	3.7	min0.81,	0.07	max 1:1	-0.2~-0.50	45
F-562	E-562	10V	5.00~6.50	4.5	min0.81,	0.04	max 1:1	-0.2~-0.53	56

*1 *2 Pinch-off current and limiting current are measured by impulse wave at 25°C


*3 ZT is minimum AC impedance when minimal voltage of 90Hz AC is added to 25 V_{DC}. ZT is used as the reference value

*4 Temperature coefficient is measured between 25°C and 50°C


Dynamic characteristics (saturation characteristics)

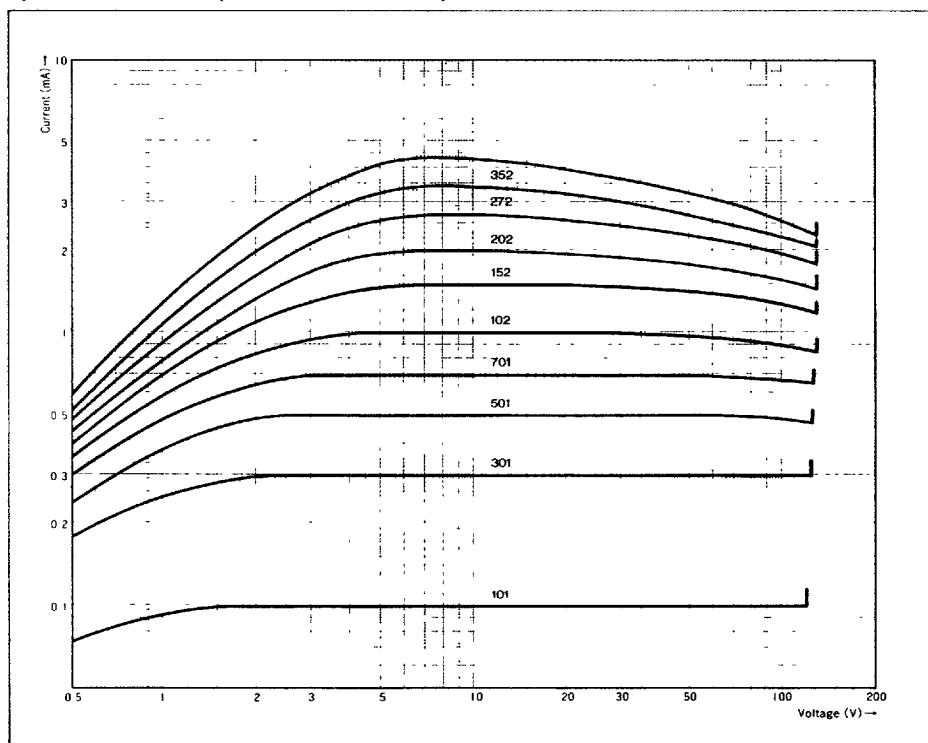

Power derating

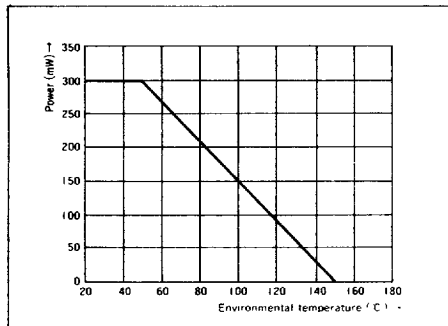


CRD permits the taping. There are two types of lead, one is 52 mm and the other is 26 mm of tape distance. There are two types of package, one is the roll (R) and the other is the fold (Z). Please indicate the taping package by the suffix following CRD Type No., e.g., 52R, 52Z, etc. Taping package minimum quantity is 5,000 pcs. in R and 1,000 pcs. in Z. Following diagram indicates the Lead-less Type taping dimensions. Minimum quantity of the taping package is 1,000 pcs. in one roll.

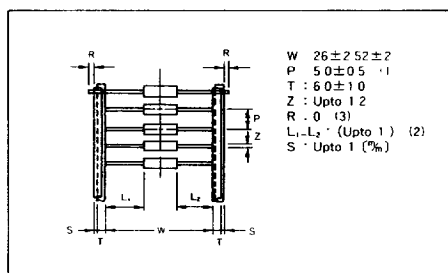


- (1) Cumulative pitch tolerance ±2 mm for 20 pitches
 (2) Absolute value between L₁ and L₂
 (3) Lead terminal should not protrude from the tape

Taping External Dimension

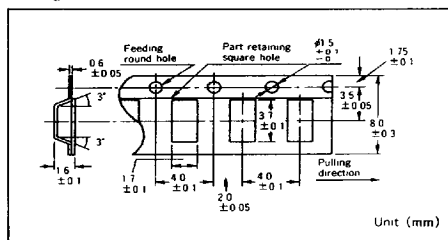

*In principal elements are set with cathode side on the round hole side


Pinch-off current Temperature

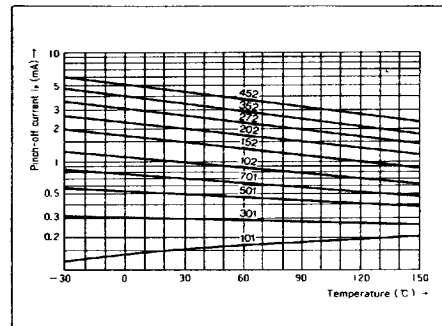


CRD in parallel

The use of CRD in parallel increases their current handling capabilities

Increasing the voltage range using a zener diode
 Connecting zener diodes in series with the line ensures that the current is constant in high-voltage area.

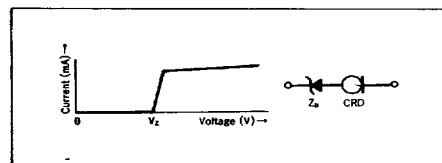


Application

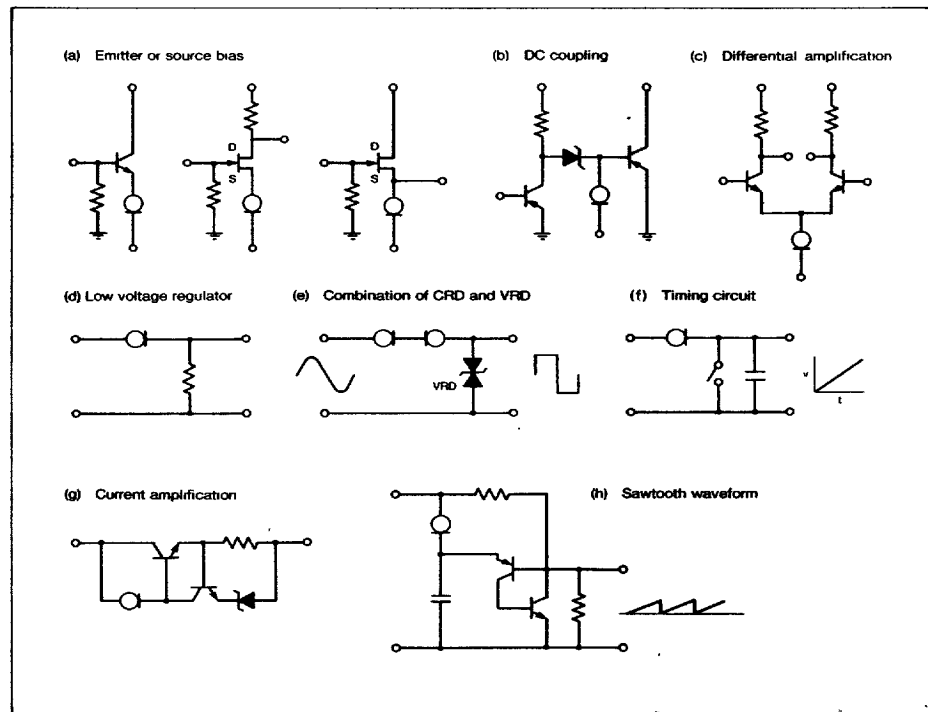

The compensation of current reduction due to self heating

Placing resistors in parallel with CRD can correct any current decrease when the applied voltage increases. The following values are typical for correction resistors.

102	1 MΩ
152	390 kΩ
202	240 kΩ
272	120 kΩ
352	82 kΩ



Compensative resistor is not necessary if the current value is less than 1 mA

