

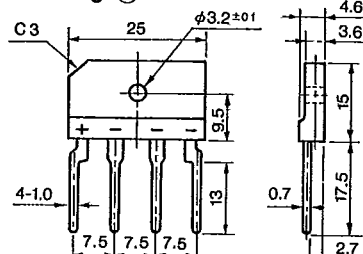




Ultra Fast Recovery Diodes

V_{RM}:100~600VI_o:5~20A

CTL/RBV/RBA

Rating/ Characteristics	Absolute Maximum Ratings						Electrical Characteristics (Ta=25°C)					Others							
	V _{RSM} (V)	V _{RM} (V)	I _o (A)	I _{FSM} (A)	T _j (°C)	T _{stg} (°C)	V _F (V)	I _R (mA)	I _{R(H)} (mA)	t _{rr} (μs)		Outline Drawing	Weight(g)	Taping	Note				
Type No.	per chip		With Fin	50Hz Half Sine Wave Single Pulse			Max. per chip	I _F (A)	V _R = V _{RM} max(per chip)	V _R = V _{RM} , T _j = 140°C max (per chip)	I _F /I _{RP} (mA)								
CTL-12S	200	200	5.0	35	-40 ~ +140		0.98	2.5	0.1	1.5	0.04	100/100	68	2.6	For High Frequency Rectification				
CTL-21S	100	100	10	65			0.98	5.0	0.2	3.0									
CTL-22S	200	200	20	150			0.98	10	0.5	2.0						0.04	500/500	69	6.1
CTL-31S	100	100																	
CTL-32S	200	200																	
RBV-406H	600	600	4.0	120	-40 ~ +150		1.0	2.0	0.01	0.1 (Ta=100°C)	5.0	100/100	70	4.05					
RBA-402L	200	200		80			0.98		0.05	0.1	0.04		71						
RBV-602L	200	200		6.0		100		1.0	3.0	0.25	1.0		0.05			72	6.45		







Thermal Resistance R_{th(j-c)} max : 3.0°C/W (CTL-1, CTL-2)
1.5°C/W (CTL-3)Outline
Drawing 68Outline
Drawing 69Outline
Drawing 70Outline
Drawing 71Outline
Drawing 72




Center Tap Internal Connection:

S Type



68 ~ 72 Plastic Molded, Flammability :
UL94V-0 or Equivalent

CTL-12S

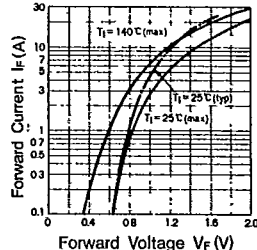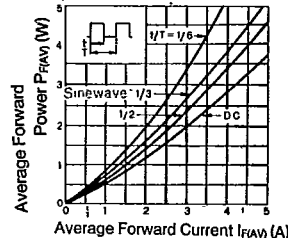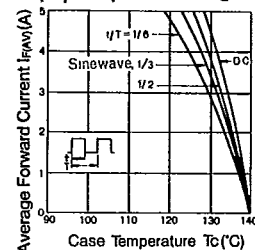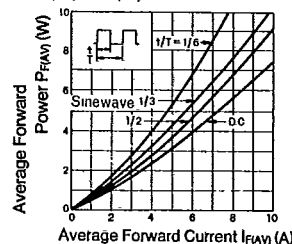
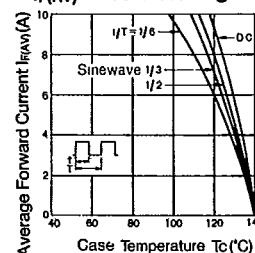
I_F - V_F Characteristics
(Typical Value) CTL-12SP_{F(AV)} - I_{F(AV)} CharacteristicsI_{F(AV)} - T_{pin} DeratingCTL-2
SeriesI_F - V_F Characteristics
(Typical Value) CTL-22SP_{F(AV)} - I_{F(AV)} CharacteristicsI_{F(AV)} - T_c Derating

CTL-3
Series

RBV-406H

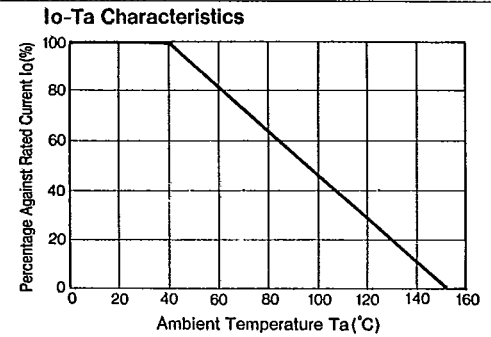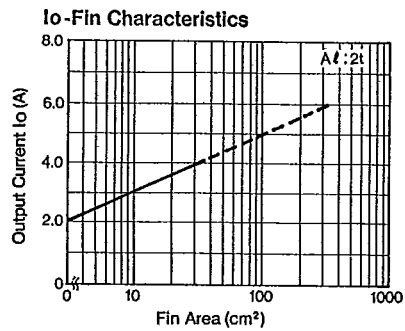

RBA-402L


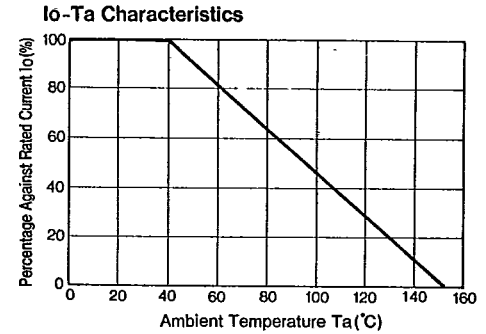
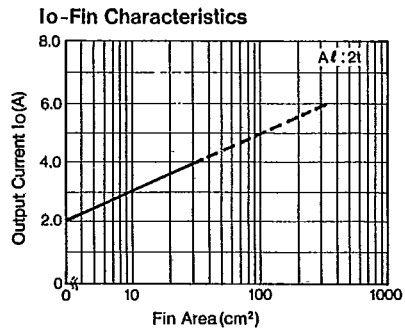


Symbols/trr Measurement Circuit

Symbols

V_{RSM}	Peak Reverse Surge Voltage	I_{RSM}	Peak Reverse Surge Current	T_{stg}	Storage Temperature
V_{RM}	Peak Reverse Voltage	I_R	Reverse Current	t_{rr}	Reverse Recovery Time
V_{P-P}	Reverse Voltage (Peak to Peak)	I_{RP}	Peak Reverse Current	C_t	Total Capacitance Between Terminals
V_R	Reverse Voltage	$I_{R(H)}$	Reverse Current (High Temperature)	$R_{th(j-c)}$	Thermal Resistance, Junction to Case
V_F	Forward Voltage	I_Z	Avalanche Current	r_z	Temperature Coefficient of Breakdown Voltage
V_B	Breakdown Voltage	I_{ZSM}	Allowable Avalanche Current	R_z	Equivalent Resistance of Breakdown Region
I_o	Average Rectified Forward Current	T_a	Ambient Temperature	$P_{F(AV)}$	Average Forward Power Dissipation
I_F	Forward Current	T_j	Junction Temperature	I^2_t	I^2_t limiting Value
$I_{F(AV)}$	Average Forward Current	T_{opr}	Operating Ambient Temperature		
I_{FSM}	Peak Forward Surge Current	T_c	Case Temperature		

Reverse Recovery Time Measurement Circuit

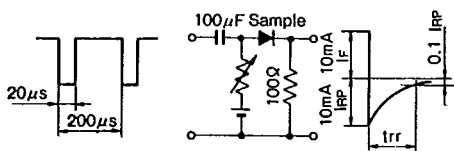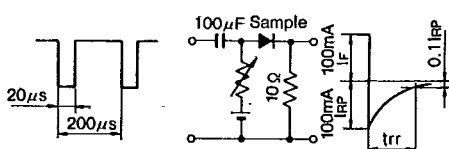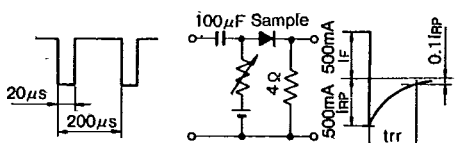① $I_F = I_{RP} = 10\text{mA}$ to 1mA ② $I_F = I_{RP} = 100\text{mA}$ to 10mA ③ $I_F = I_{RP} = 500\text{mA}$ to 50mA 

Taping Specifications

Excluding High Voltage Diodes


Designation	Dimension (in mm)	Packaging Dimension and Marking	Quantity
V Add Suffix [V] to Type No.	Tape Carrier Method (1) Right side of taping direction is cathode. (2) Place electrode side down when casing. (3) Provide leader tape of 150~200mm at beginning of tape. (4) Provide space of more than 10 pitches each for beginning and end of tape.	Reel Marking of Type No., Lot No. and Quantity 	1,800 pcs per reel
V Add Suffix [V] to type No.	Axial Taping 	Reel Markings of Type No. Lot No. and Quantity 	5,000 pcs per reel (2.7φ body) 3,000 pcs per reel (4.0φ body)

Taping Specifications

Designation	Dimension (in mm)	Packaging Dimension and Marking	Quantity
V1 Add Suffix [V1] to Type No.	Axial Taping 	Ammunition Pack 	2,000 pcs per box (2.7 ϕ body) 1,000 pcs per box (4.0 ϕ body)
VO Add Suffix [VO] to Type No.	Axial Taping 	Ammunition Pack 	2,000 pcs per box (2.7 ϕ body) (2.4 ϕ body)
V3 Add Suffix [V3] to Type No.	Axial Taping 	Reel 	1,500 pcs per reel (5.2 ϕ body)
V4 Add Suffix [V4] to Type No.	Axial Taping 	Ammunition Pack 	1,000 pcs per box (5.2 ϕ body)
W Add Suffix [W] to Type No.	Radial Taping 	Ammunition Pack 	4,000 pcs per box (2.7 ϕ body) (0.6 ϕ lead)
WS Add Suffix [WS] to Type No.	Radial Taping (Applicable to AO Series) 	Ammunition Pack 	2,500 pcs per box (2.4 ϕ body)
WK Add Suffix [WK] to Type No.	Radial Taping (Applicable to AO Series) 	Ammunition Pack 	2,500 pcs per box (2.4 ϕ body)


Marking Guide

1 Small TMD




- ① Type Designation (in abbreviation)
AM01 is abbreviated as M.
- ② Class Designation
Z: 200V, No Letter: 400V, A: 600V
- ③ A: Year (Last Number of AD Year)
B: Month (Jan. to Sept. are represented by numbers 1 to 9 respectively, and Oct., Nov., and Dec. are abbreviated as O, N and D respectively)
- ④ Cathode Band: Successive Band, however AU02 Type is Non-Successive Band.

2 E/EO Type TMD



- ① Type Designation (in abbreviation)
EM01 is abbreviated as MO, EM2 is abbreviated as M2.
- ② Class Designation
Z: 200V, No Letter: 400V, A: 600V
B: 800 V, C: 1000V, F: 1500V
However, EU02A to be marked 2A, and EU2YX to be marked Y.
- ③ Abbreviations Representing Production Period
A: Year (Last Number of AD Year)
B: Month (1~9, O, N, D)
- ④ Production Period Divided in 3 ten day terms
• : 1st 10days •• : 2nd 10days ••• : 3rd 10days


3 R Type TMD



- ① Type Designation: Mark in 2 sets
- ② Production Period: Mark in 4 sets
A: Year (Last Number of AD Year)
B: Month (1~9, O, N, D)
- ③ Production Period Divided in 3 ten day terms
• : 1st 10days •• : 2nd 10days ••• : 3rd 10days
- ④ Cathode Band Color: Silver: For Power Supply
Yellow: For Middle Speed
Red : For High Speed and Ultra-High Speed


4 RB40/60

(RB40 Series)




- ① Peak Reverse Voltage Designation
1, 2, 4, 6, C
- ② Production Period
- ③ Year (Last Number of AD Year)
- ④ Month (1~9, O, N, D)
- ⑤ Divided in 3 ten day terms
A: 1st 10days, B: 2nd 10days
C: 3rd 10days
- ⑥ Color Designation: Silver

(RB60 Series)




Dot Designation RB601 Violet
RB602 No Color
RB604 Blue
RB606 White

5 RBV/RBA




- ① Type Designation
- ② Lot Number
1st : Year (Last Number of AD Year)
2nd: Month (1~9, O, N, D)
3rd : Divided 1~3 ten day Terms
A: 1st 10 days B: 2nd 10 days
C: 3rd 10 days
- ③ In-Put Designation

6 TO220 Type (FM or CT Type)




- ① Type Designation
Show FMU-12S as FMU12S.
- ② Polarity: Rectifier Symbols
- ③ Lot Number (Laser Marking)
1st : Year (Last Number of AD Year)
2nd : Month (0~9, O, N, D)
3rd, 4th: Day

7 TO220 Type (FM or CT Type, single chip)




- ① Type Designation: Omit Last Letter
Show FML-G12S as FMLG12.
- ② Last Letter of Type Designation
- ③ Polarity: Rectifier Symbols
- ④ Lot Number (Laser Marking)
1st : Year (Last Number of AD Year)
2nd : Month (0~9, O, N, D)
3rd, 4th: Day

8 TO3P Type (FM or CT Type)




- ① Type shown in full designation
However, CTB-34/34S/34M are marked as CTB-34, CTU-G3DR is marked as CTUG3DR.
- ② Polarity: Rectifier Symbols
- ③ Lot Number:
1) M, U, G and L Types
First Number : Last Digit of AD Year
Second Number : Month
Third and Fourth Numbers: Day
Fifth Number : None
2) For types CTB-34/34S/34M, the fifth letter shows type designation. If no fifth number, the type is CTB-33 or CTB-34.
3) Marking Color: Silver

9 MI-10/15 Type



- ① MI-10/15 is die-stamped on the top of the case.
- ② Rectifier Symbols
- ③ Lot Number:
First Number : Peak Reverse Voltage:
(Letter) 0=50V, 1=100V, 2=200V,
4=400V, 6=600V, C=1000V
Second Number : Last Digit of AD Year
Third Number : Month
Fourth and Fifth Numbers: Day
Sixth Number : Production number and
U: Voltage Doubler Type

10 SFP Type



- ① Type Designation:
SFPB-64 is abbreviated at B64.
- ② Cathode Band