

D200LC40B

400V 200A


FEATURES

- High current capacity
- trr150ns
- Insulated Package

APPLICATION

- Semiconductor Production Equipment
- Big Power Supply
- Factory Automation, Robot

OUTLINE DIMENSIONS

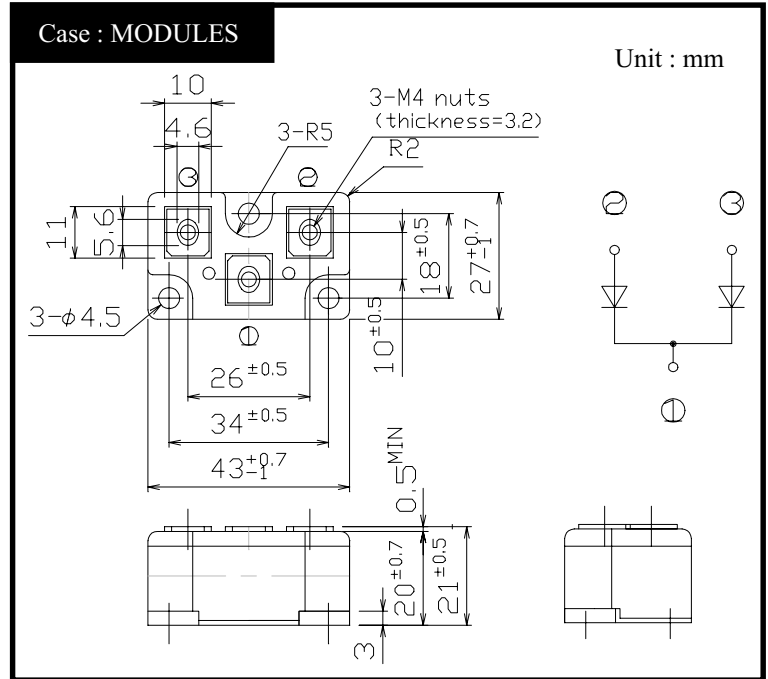

RATINGS


● Absolute Maximum Ratings (If not specified Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-40~150	°C
Operating Junction Temperature	T _j		150	°C
Maximum Reverse Voltage	V _{RM}		400	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, Rating for each arm I _o /2, T _c =52°C	200	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, Rating of per arm T _j =25°C	1400	A
Dielectric Strength	V _{dis}	Terminals to case, AC 1 minute	1.5	kV
Mounting Torque	TOR		1.7	N·m


● Electrical Characteristics (If not specified Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =100A, Pulse measurement, Rating of per arm	Max.1.3	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement, Rating of per arm	Max.50	μA
Reverse Recovery Time	trr	I _F =0.5A, I _R =1A, Rating of per arm	Max.150	ns
Thermal Resistance	θ _{jc}	junction to case	Max.0.35	°C/W


D200LC40B Forward Voltage

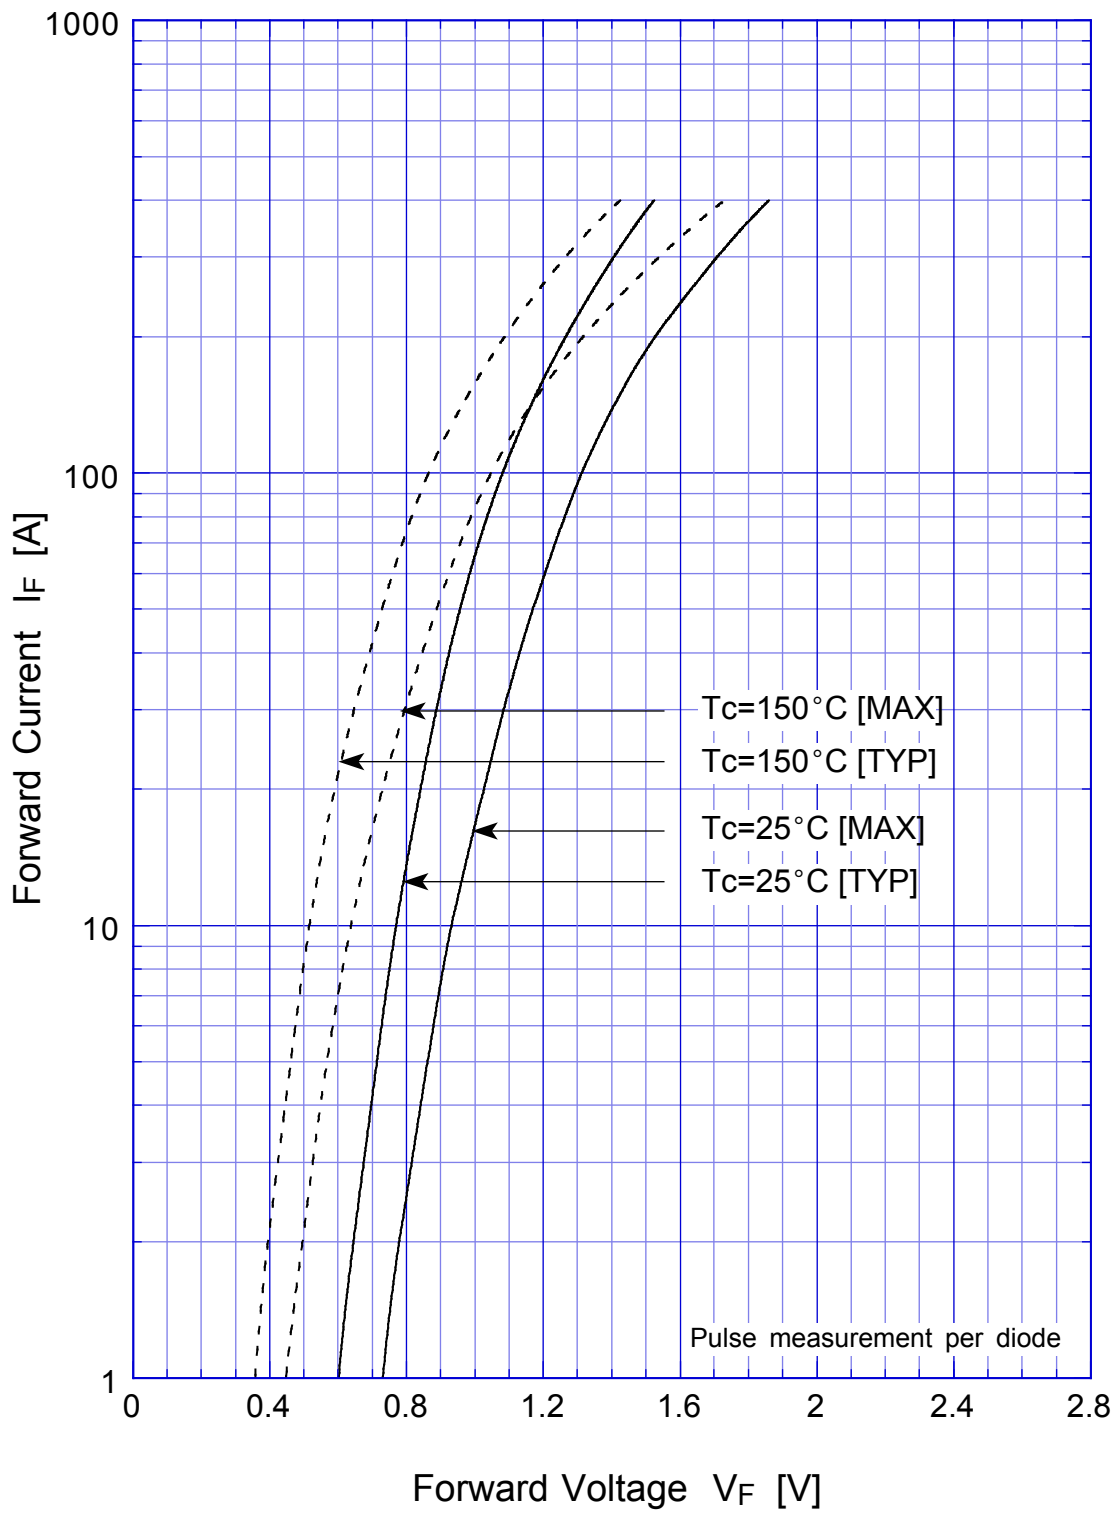

D200LC40B Forward Power Dissipation

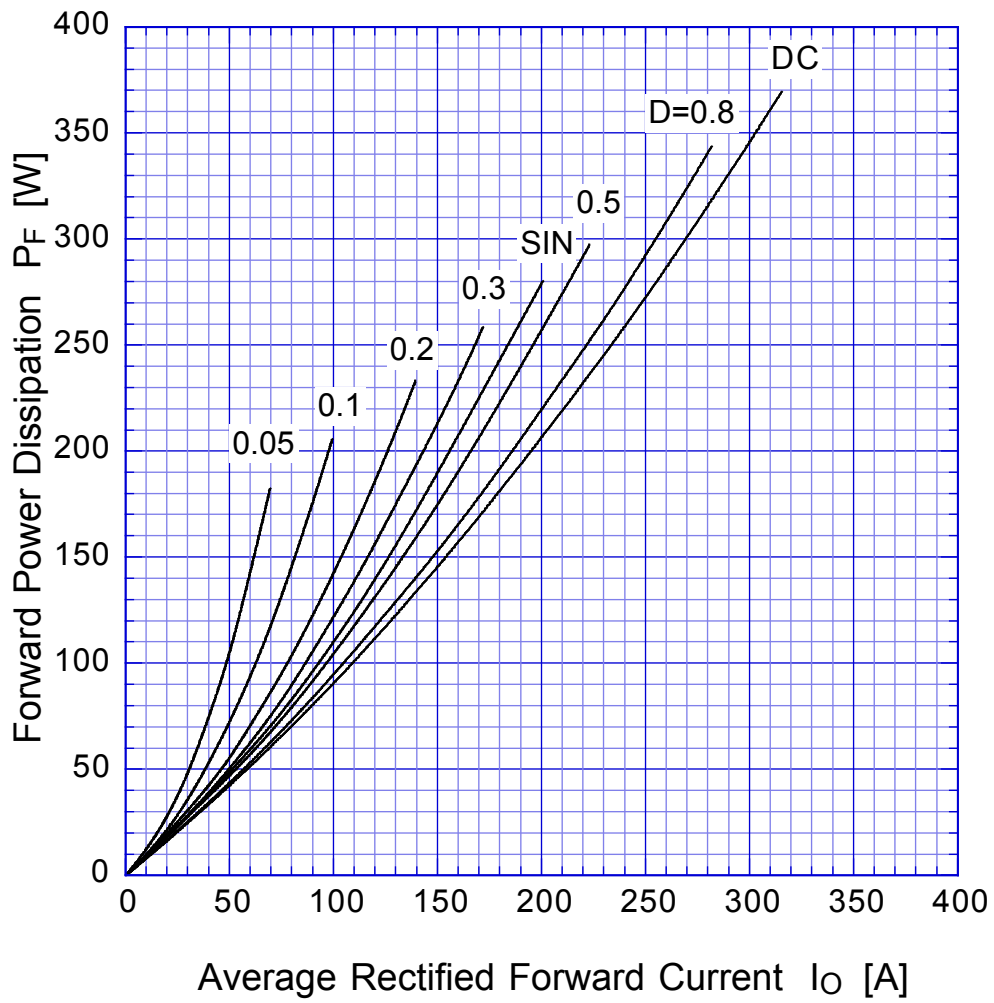


$T_j = T_{jmax}$

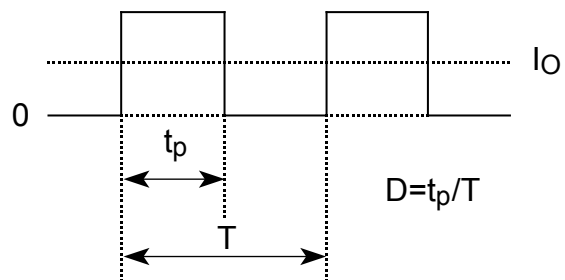

D200LC40B


Derating Curve

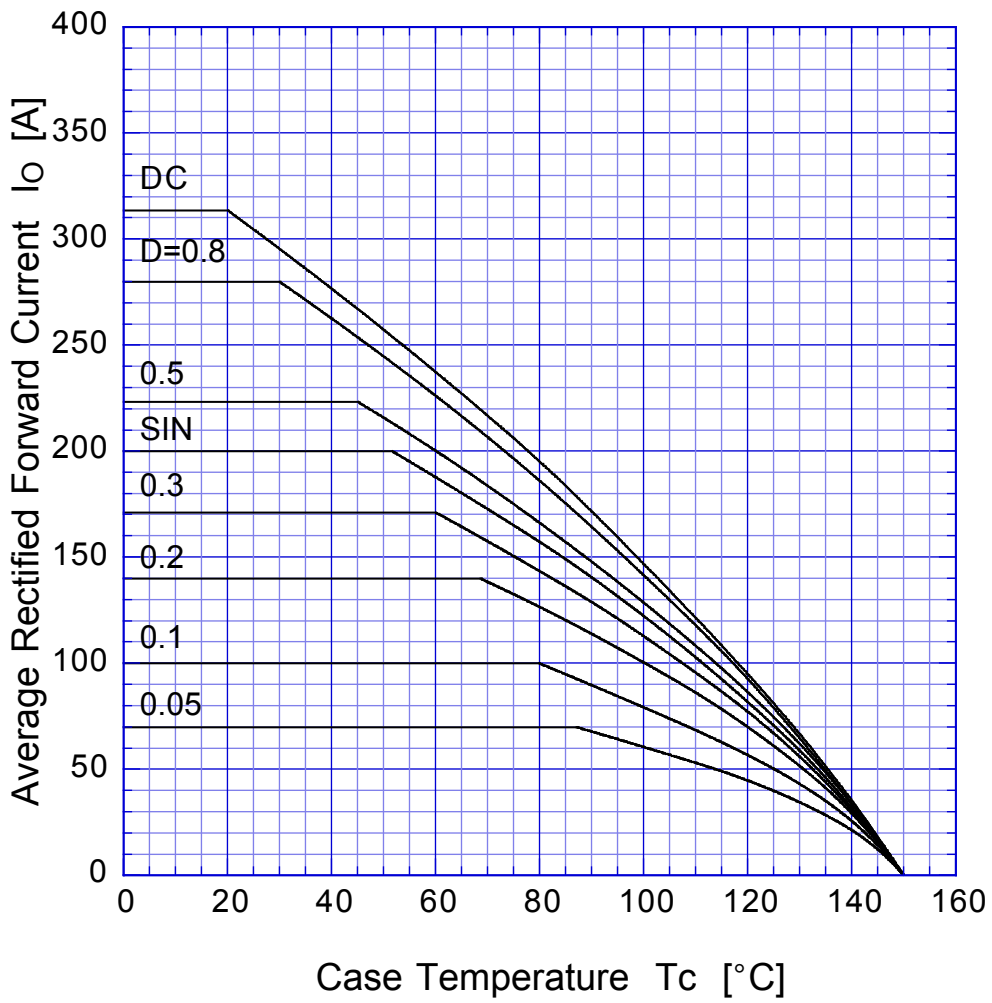

$$V_R = V_{RM}$$



D200LC40B Peak Surge Forward Capability

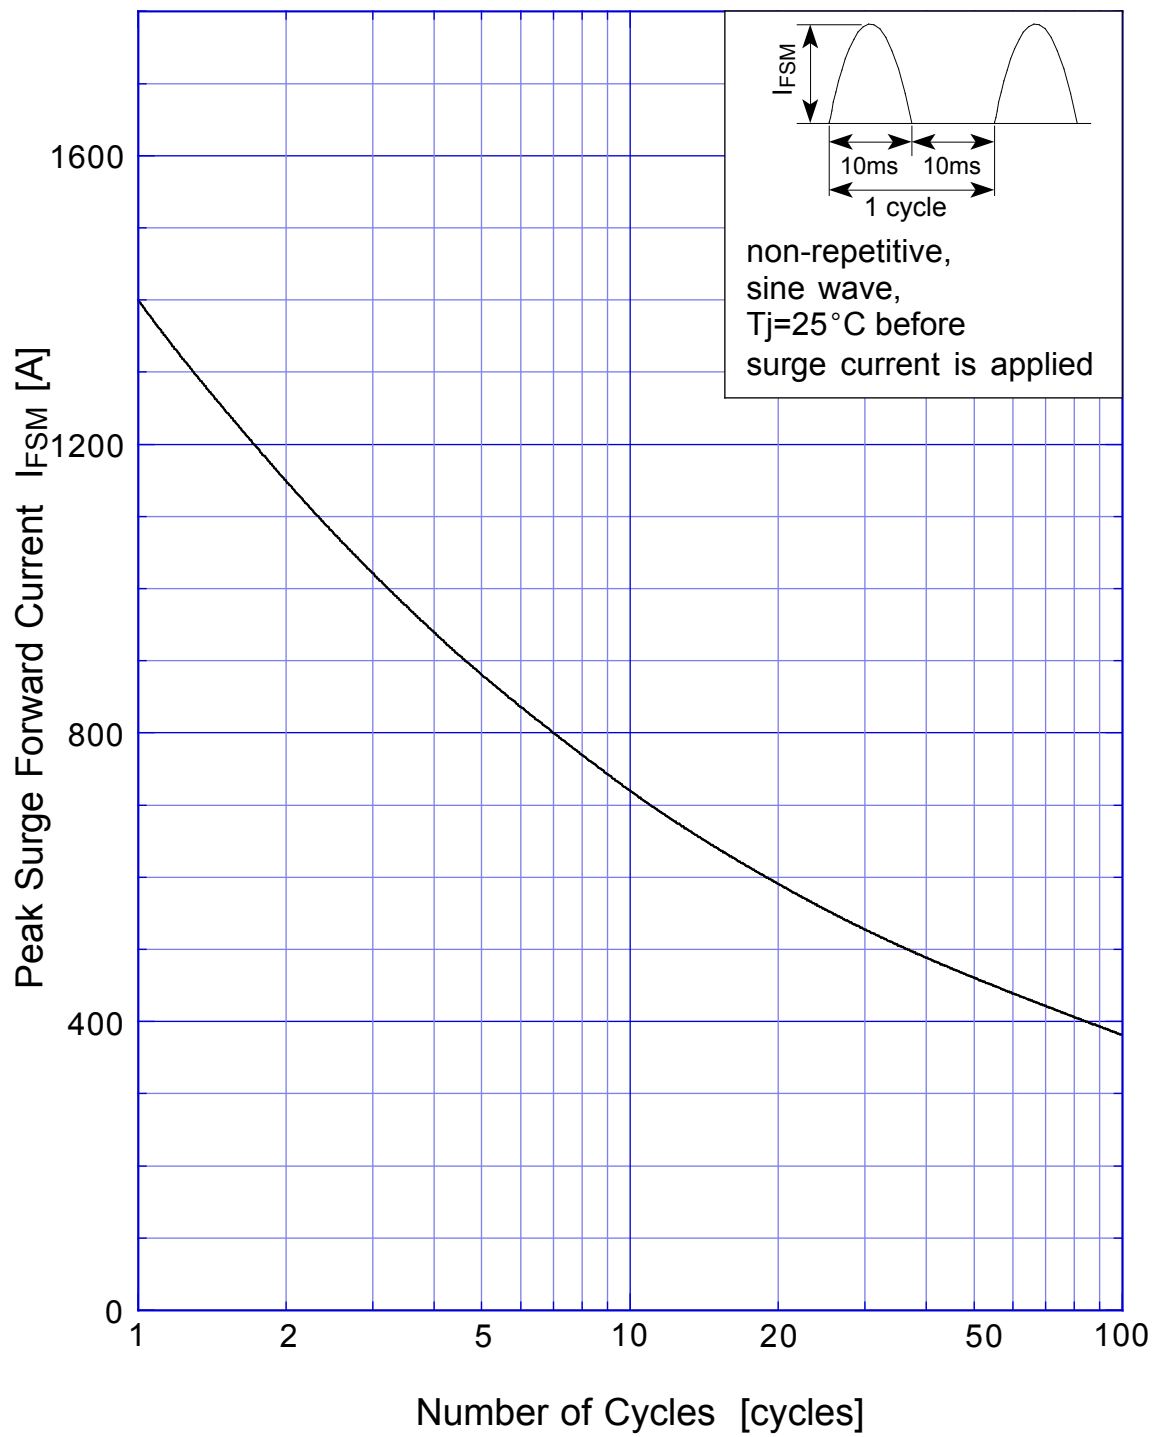

D200LC40B Junction Capacitance

