

SHINDENGEN


Schottky Rectifiers (SBD)

Single

D3FS6

60V 3A

OUTLINE DIMENSIONS

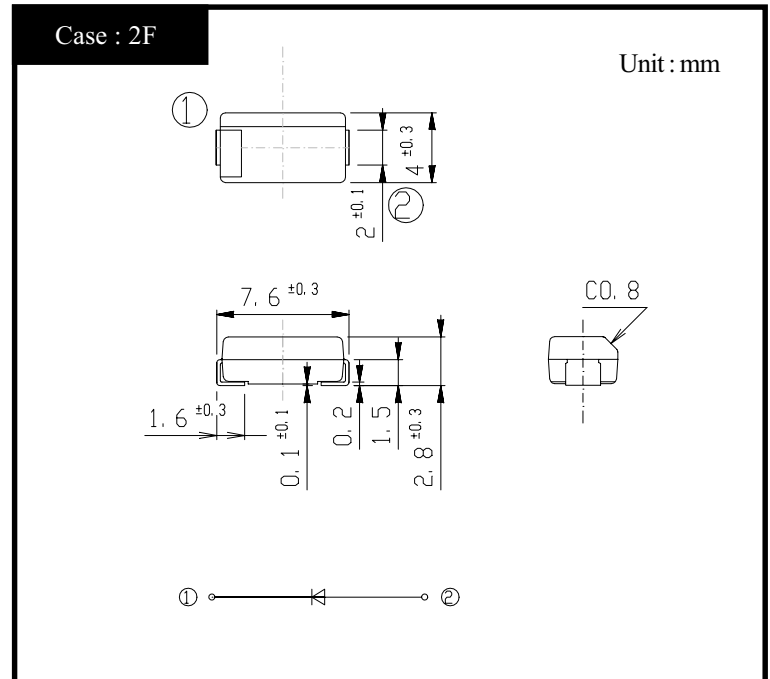

RATINGS

● Absolute Maximum Ratings (If not specified $T_I=25^{\circ}\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-55~150	$^{\circ}\text{C}$
Operating Junction Temperature	T_j		150	$^{\circ}\text{C}$
Peak Reverse Voltage	V_{RM}		60	V
Repetitive Peak Surge Reverse Voltage	V_{RRSM}	Pulse width 0.5ms, duty 1/40	65	V
Average Rectified Forward Current	I_O	50Hz sine wave, R-load $T_a=25^{\circ}\text{C}$ On alumina substrate	1.65	A
		50Hz sine wave, R-load $T_I=87^{\circ}\text{C}$	3.0	
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=25^{\circ}\text{C}$	80	A
Repetitive Peak Surge Reverse Power	P_{RRSM}	Pulse width 10 μ s, $T_j=25^{\circ}\text{C}$	330	W

● Electrical Characteristics (If not specified $T_I=25^{\circ}\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=3\text{A}$, Pulse measurement	Max.0.58	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement	Max.2.5	mA
Junction Capacitance	C_j	$f=1\text{MHz}$, $V_R=10\text{V}$	Typ.130	pF
Thermal Resistance	θ_{jl}	junction to lead	Max.24	$^{\circ}\text{C}/\text{W}$
	θ_{ja}	junction to ambient On alumina substrate	Max.90	
		junction to ambient On glass-epoxy substrate	Max.124	


D3FS6

Forward Voltage

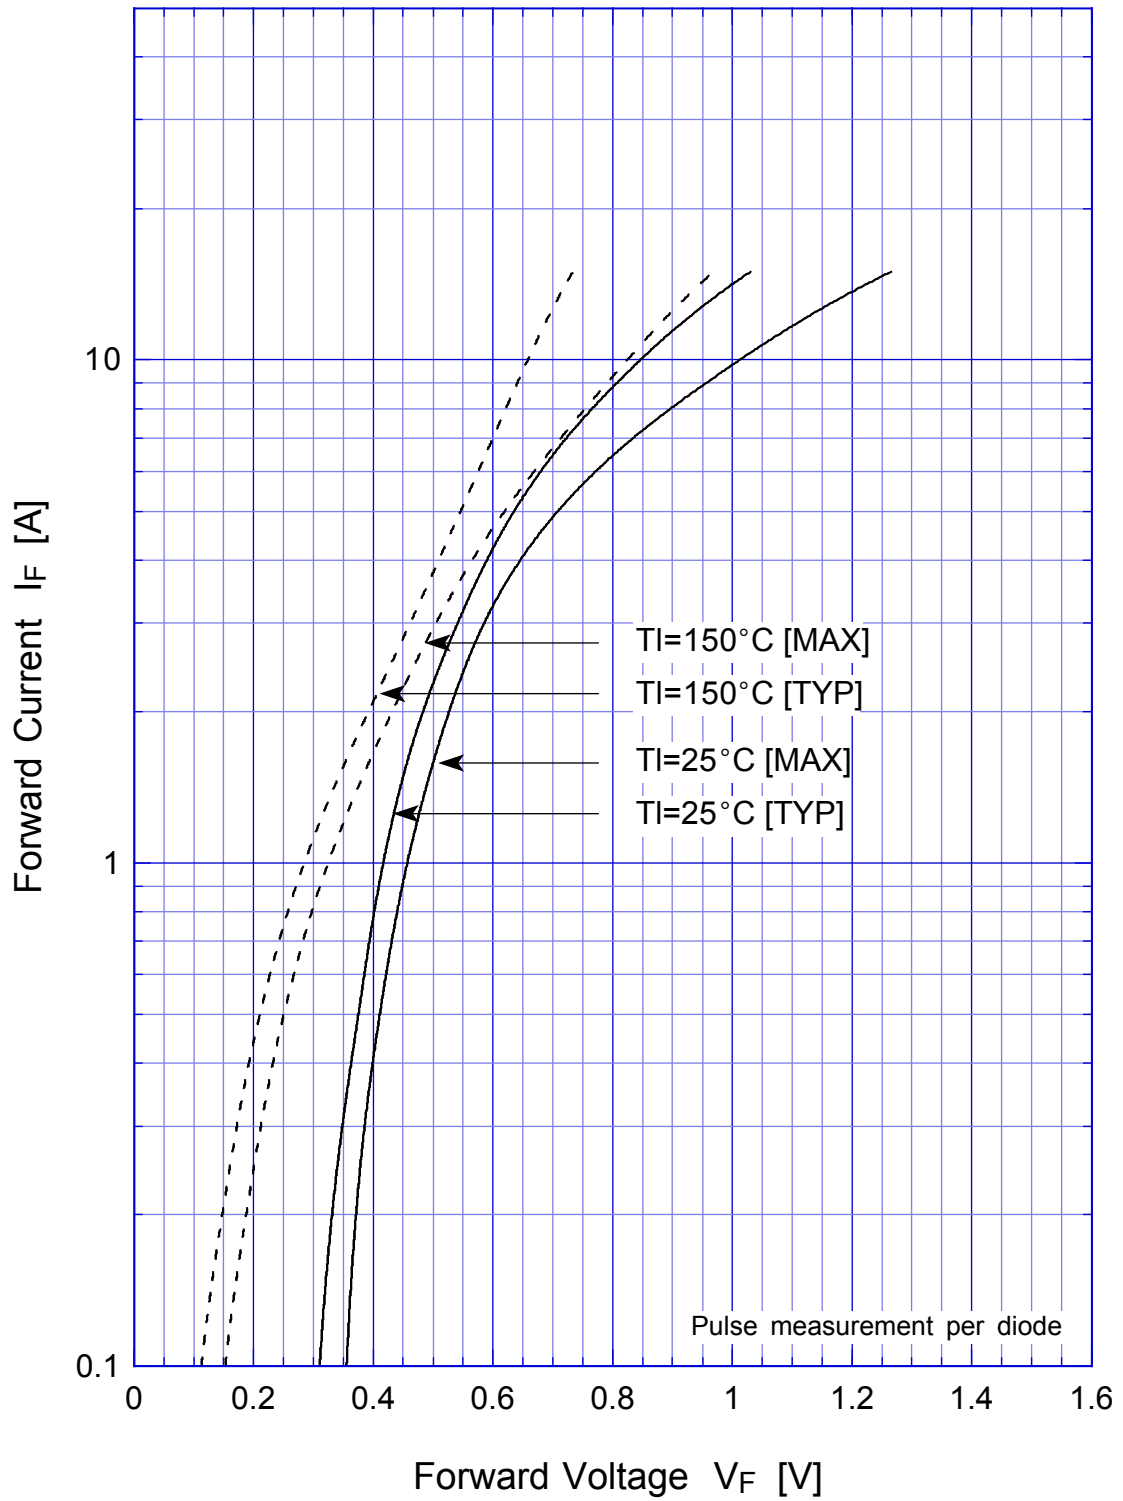


D3FS6

Junction Capacitance

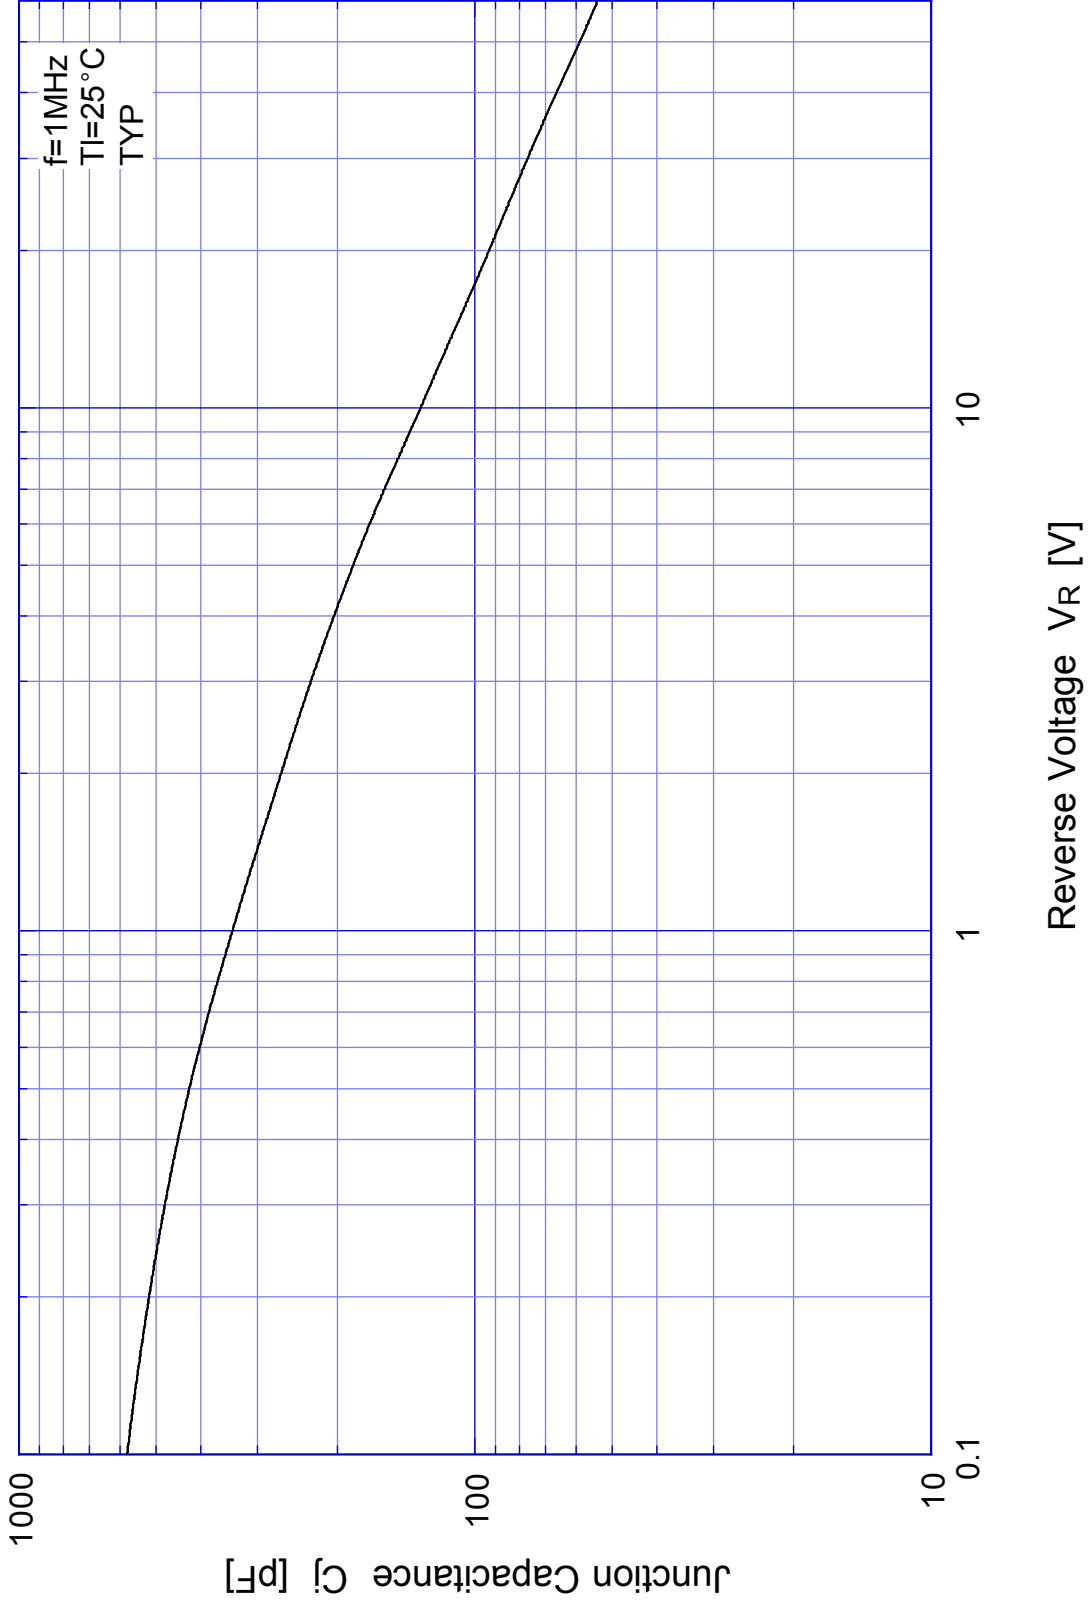


D3FS6

Reverse Current

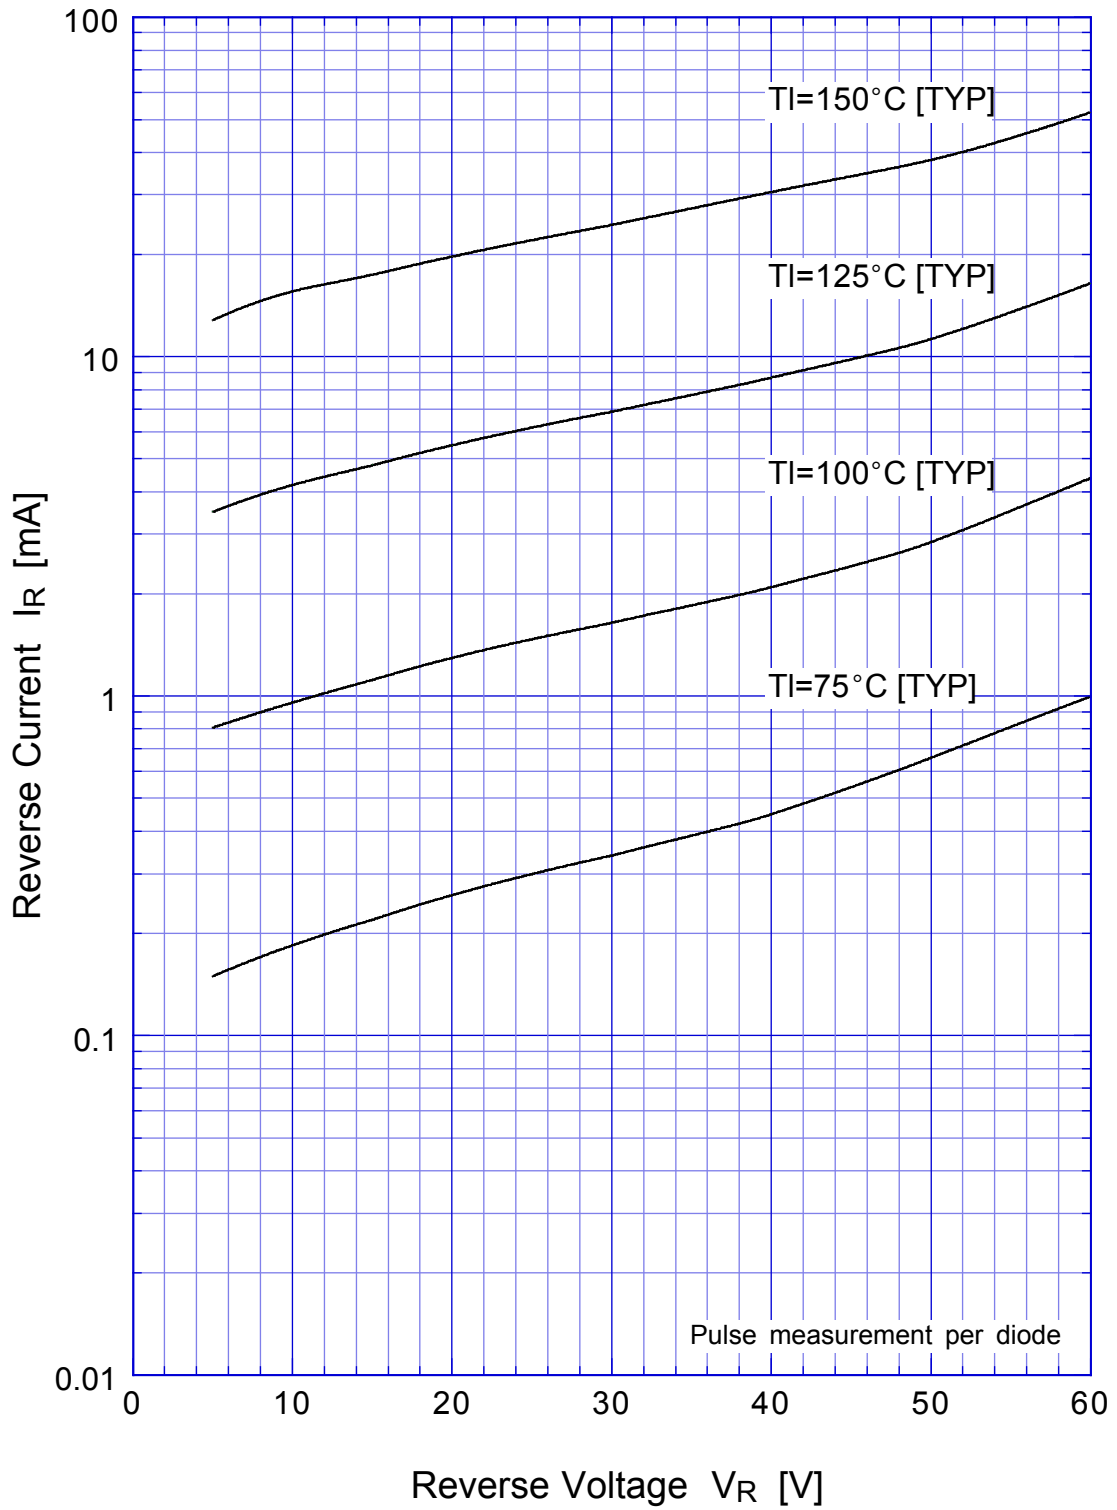


D3FS6

Reverse Power Dissipation

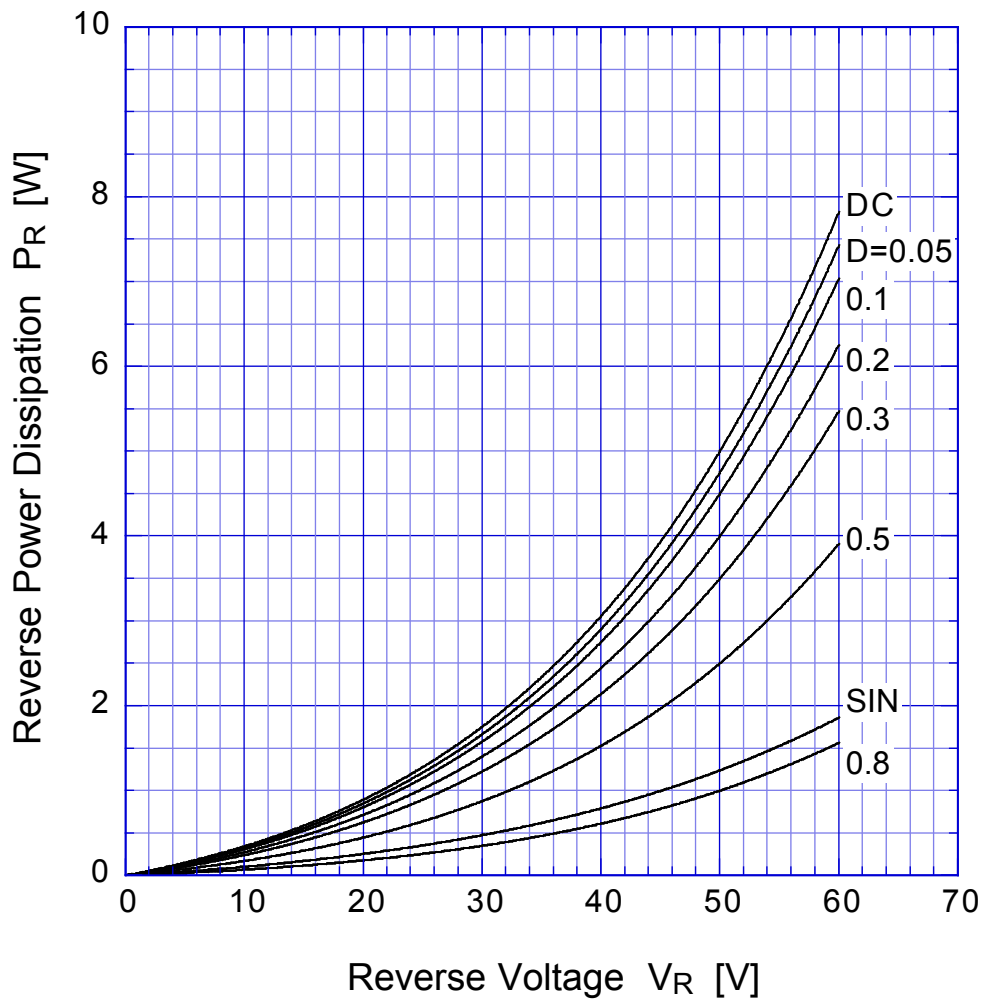


$T_j = 150^\circ\text{C}$

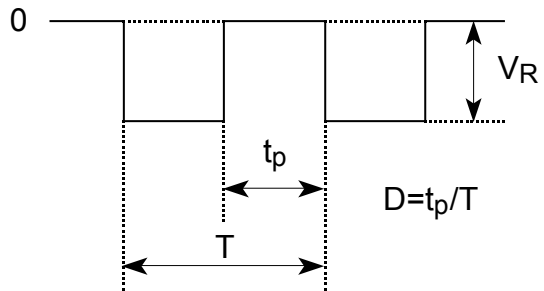


D3FS6

Forward Power Dissipation

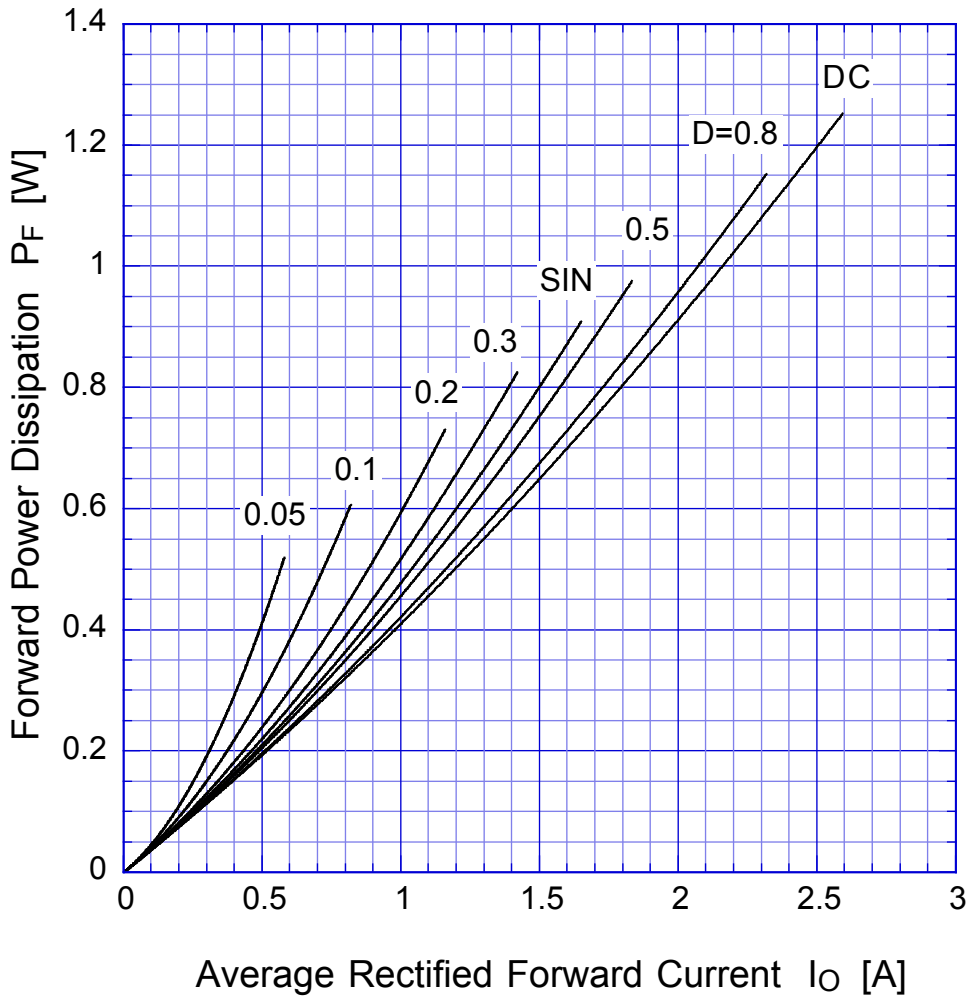


$T_j = 150^\circ\text{C}$

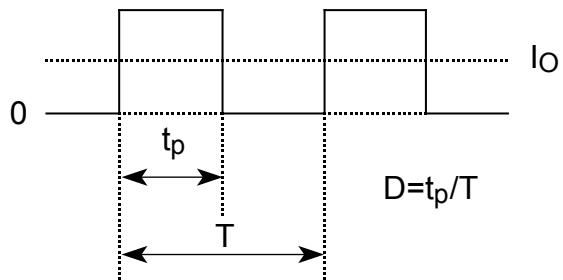


D3FS6

Derating Curve

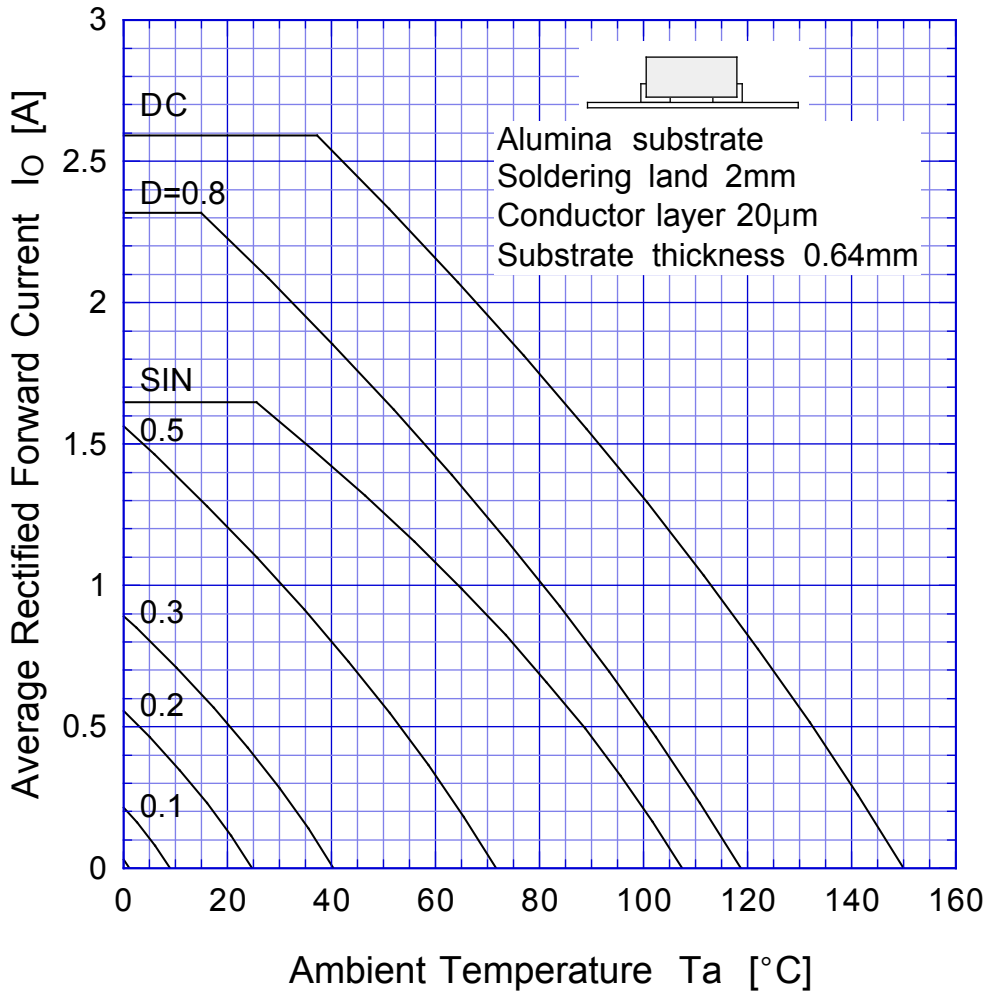


$V_R = 30V$

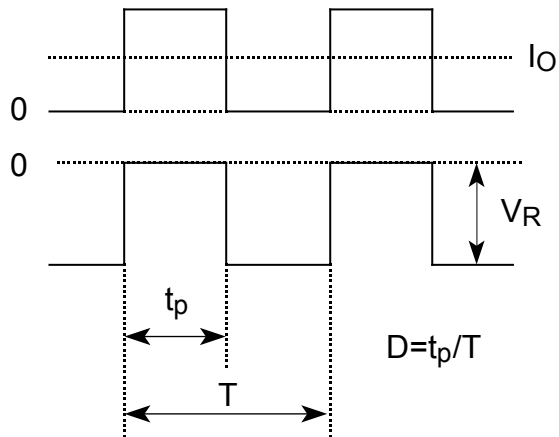

D3FS6

Derating Curve

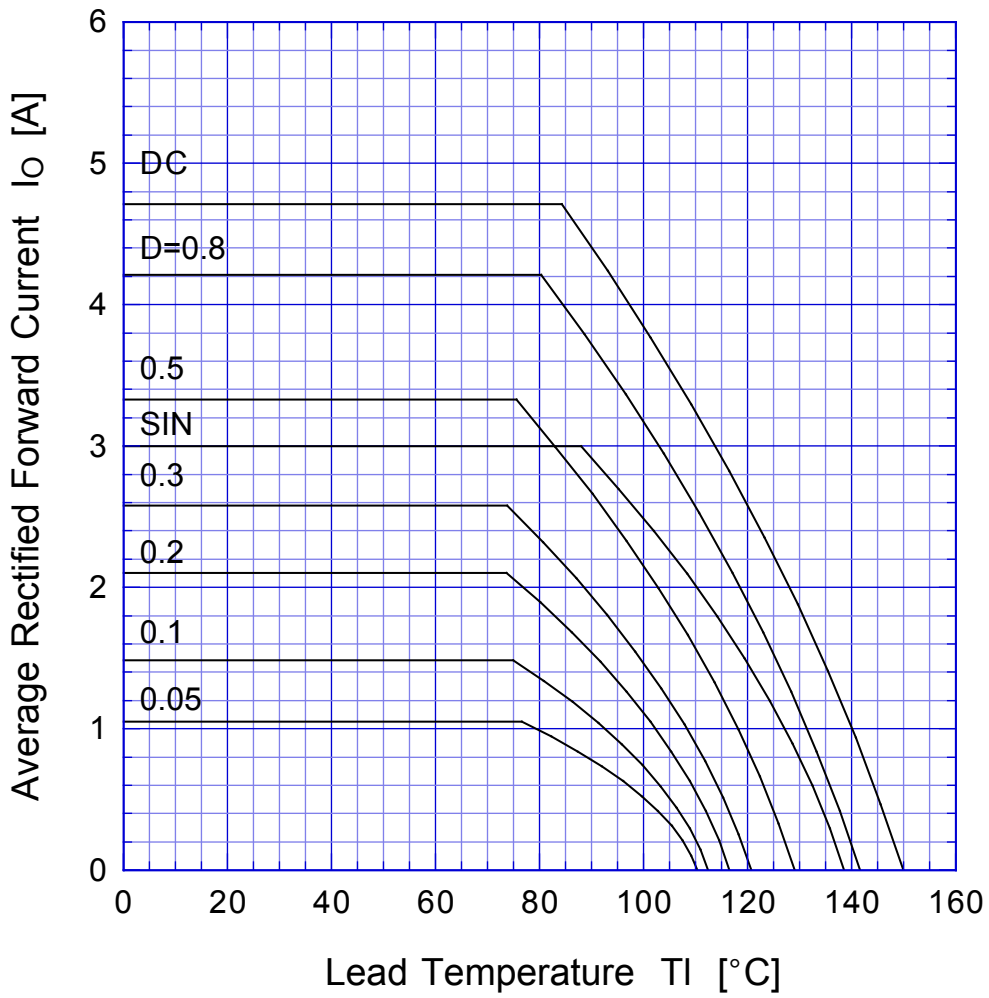


$V_R = 30V$




D3FS6

Peak Surge Forward Capability

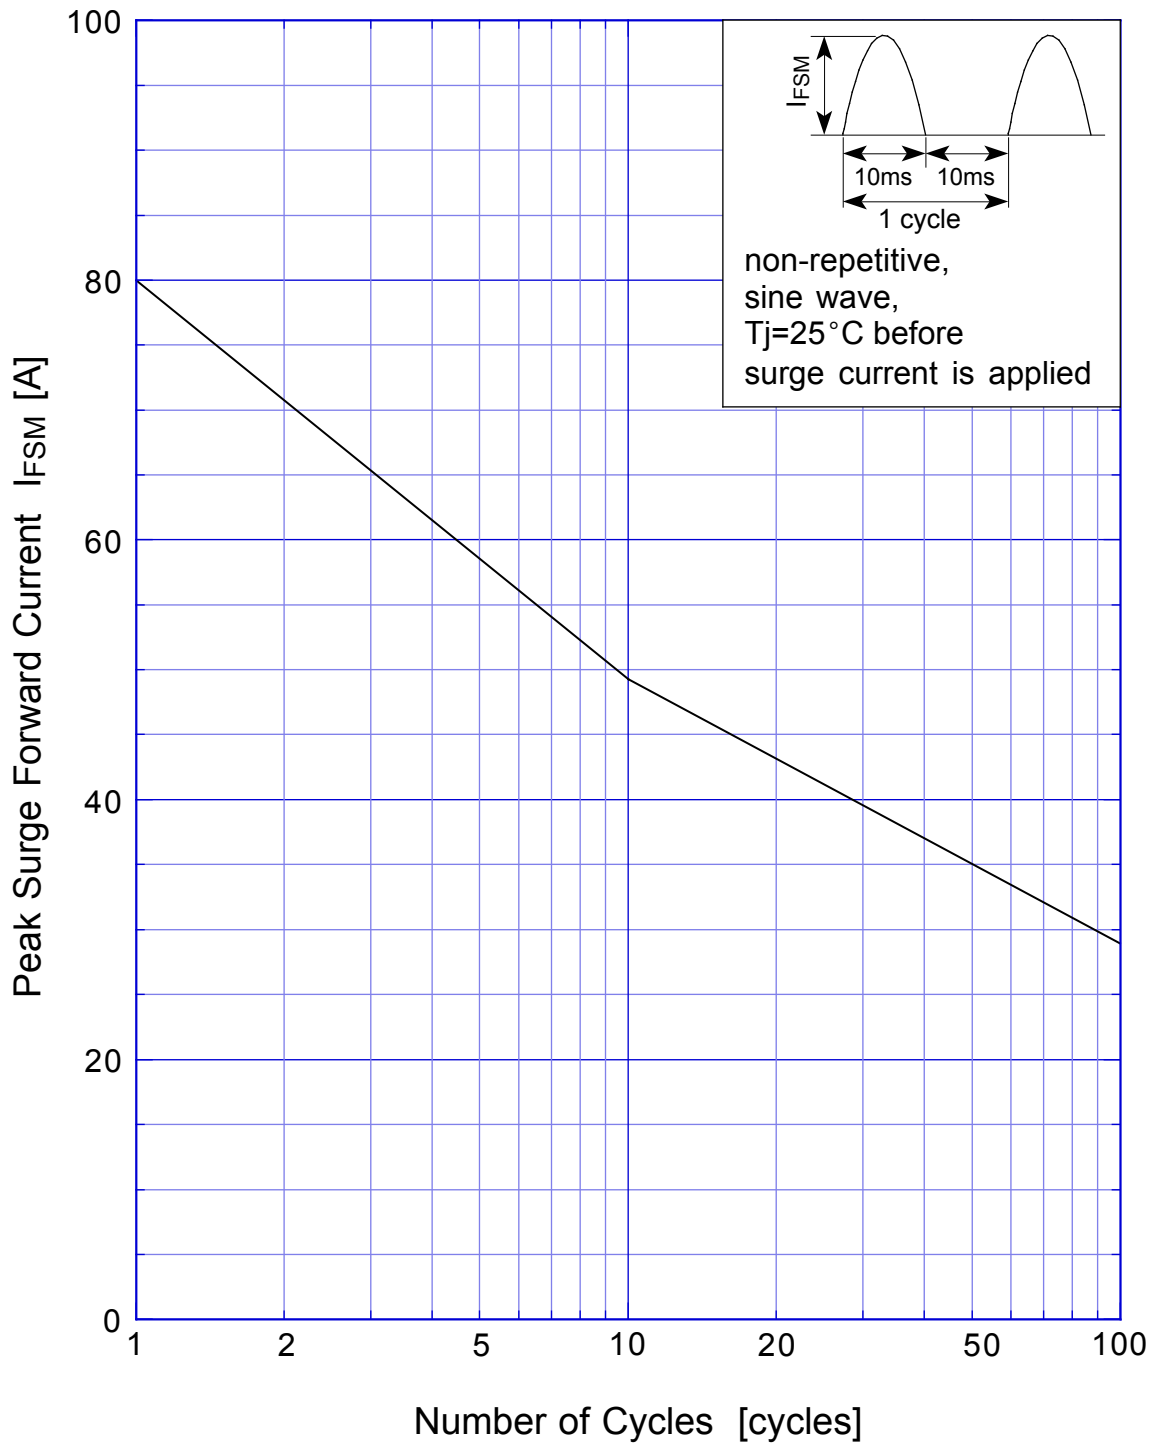

SBD Repetitive Surge Reverse Power Derating Curve

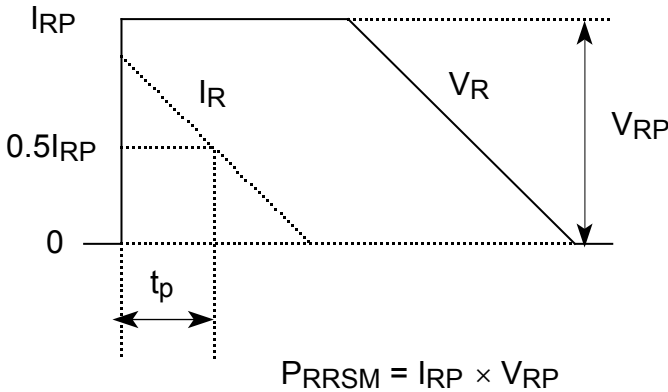

SBD

Repetitive Surge Reverse Power Capability

