

SHINDENGEN

Super Fast Recovery Rectifiers

Super Fast Bridges

D4SBL40

400V 4A


FEATURES

- Low noise
- SIL Package
- High IFSM

APPLICATION

- Switching power supply
- Home (Electrical) Appliances
- Office Equipment, Telecommunication, Factory Automation

OUTLINE DIMENSIONS

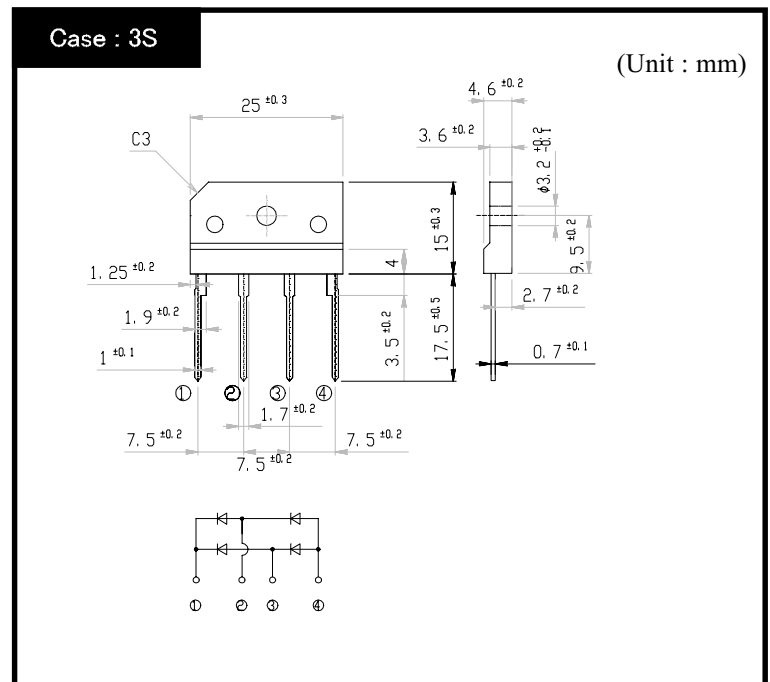

RATINGS

● Absolute Maximum Ratings (If not specified Tc=25°C)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-55~150	°C
Operating Junction Temperature	T _j		150	°C
Maximum Reverse Voltage	V _{RM}		400	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load With heatsink T _c =91°C	4	A
		50Hz sine wave, R-load Without heatsink T _a =25°C	1.95	
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1cycle peak value, T _j =25 °C	50	A
Dielectric Strength	V _{dis}	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque:0.5N·m)	0.8	N·m

● Electrical Characteristics (If not specified Tl=25°C)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =2.5A, Pulse measurement, Rating of per diode	Max.1.3	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement, Rating of per diode	Max.10	μA
Reverse Recovery Time	t _{rr}	I _F = 0.5A, I _R = 1A	Max.50	ns
Thermal Resistance	θ _{jc}	junction to case With heatsink	Max.5.5	°C/W
	θ _{jl}	junction to lead Without heatsink	Max.6	
	θ _{ja}	junction to ambient Without heatsink	Max.30	

D4SBL40


Forward Voltage

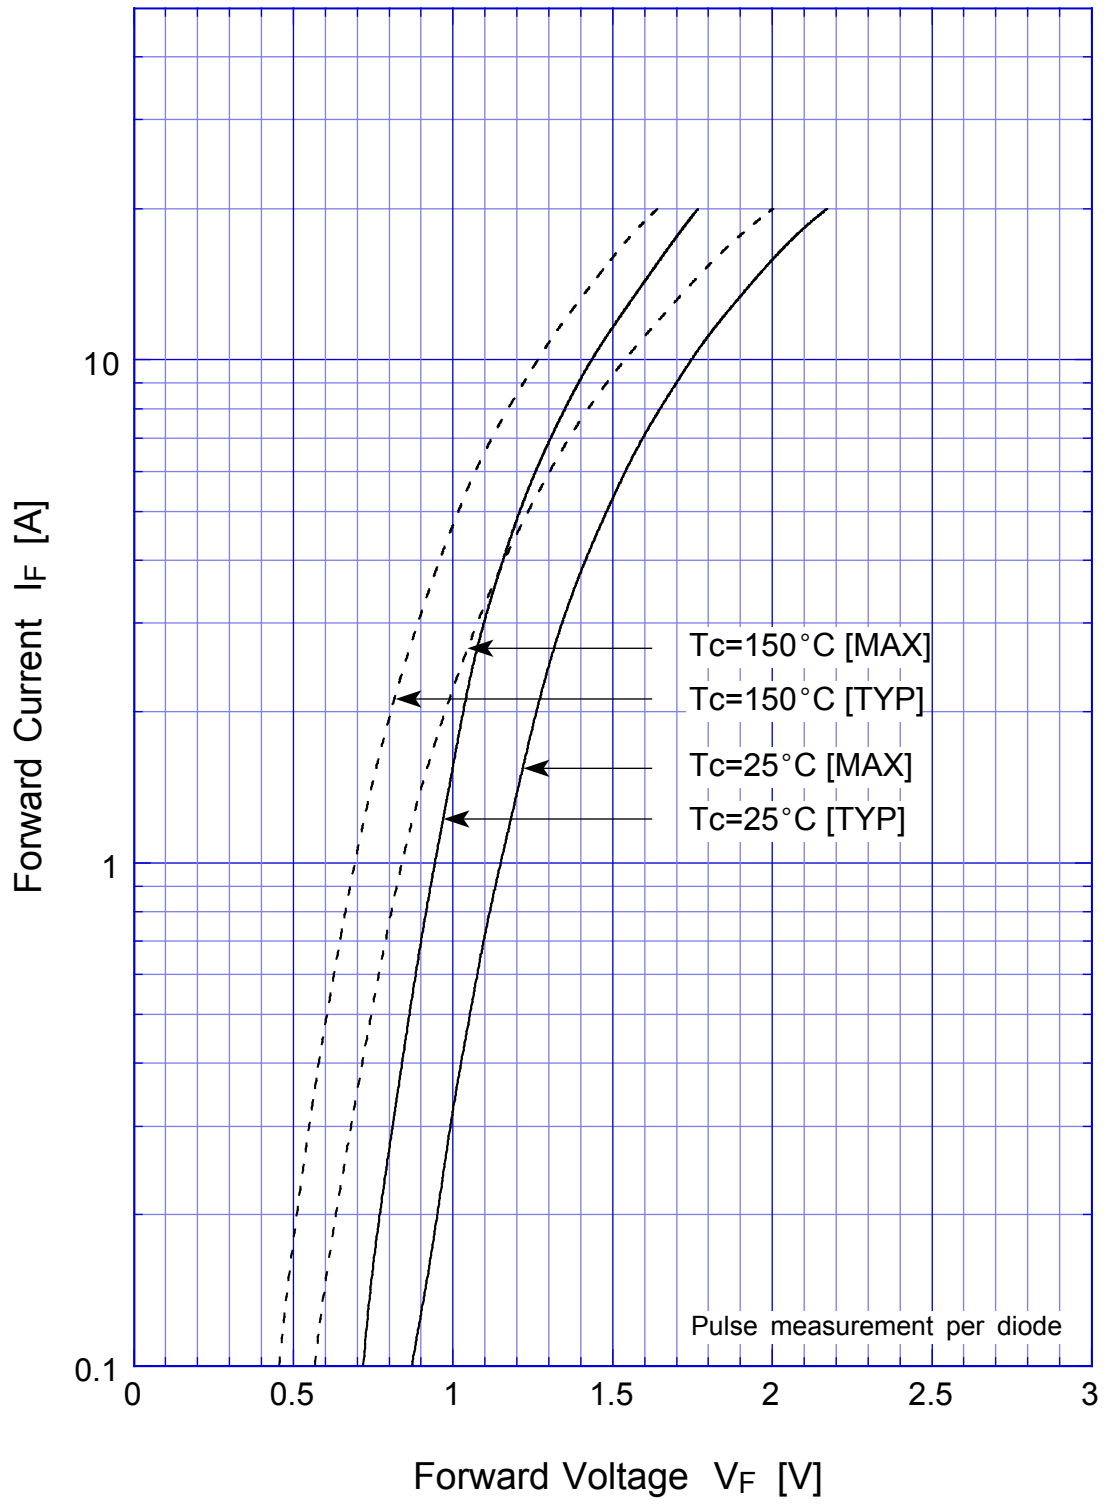


D4SBL40 Junction Capacitance

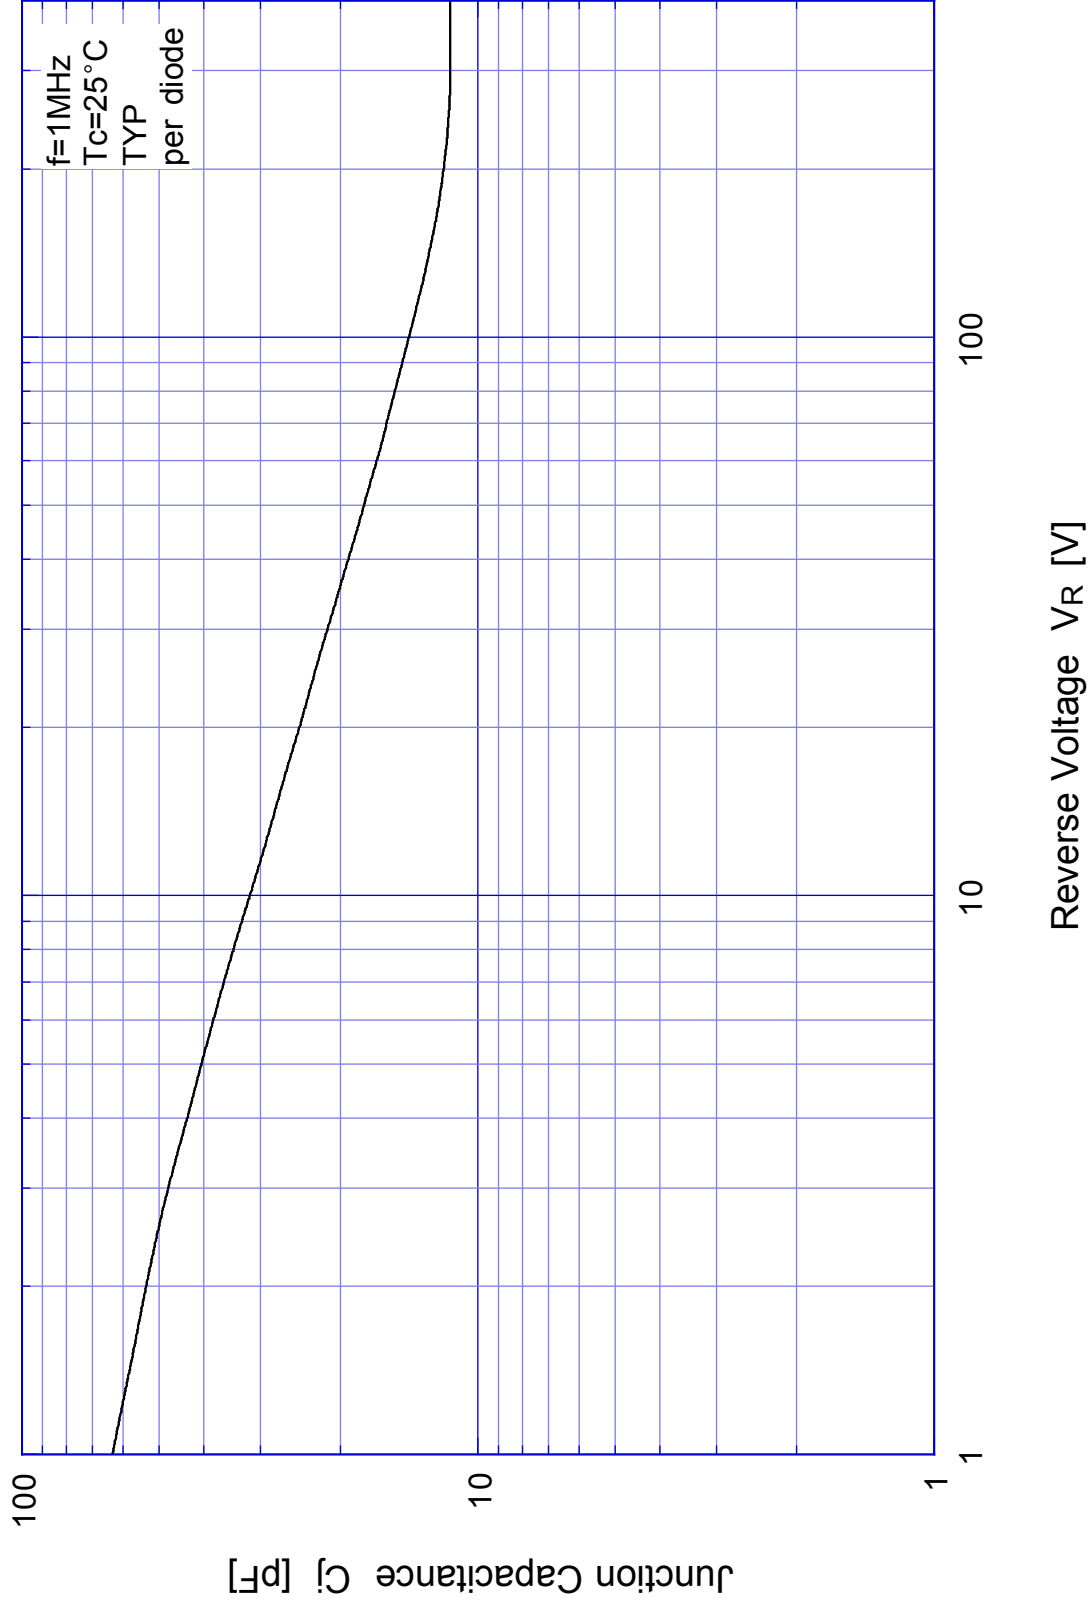

D4SBL40 Forward Power Dissipation

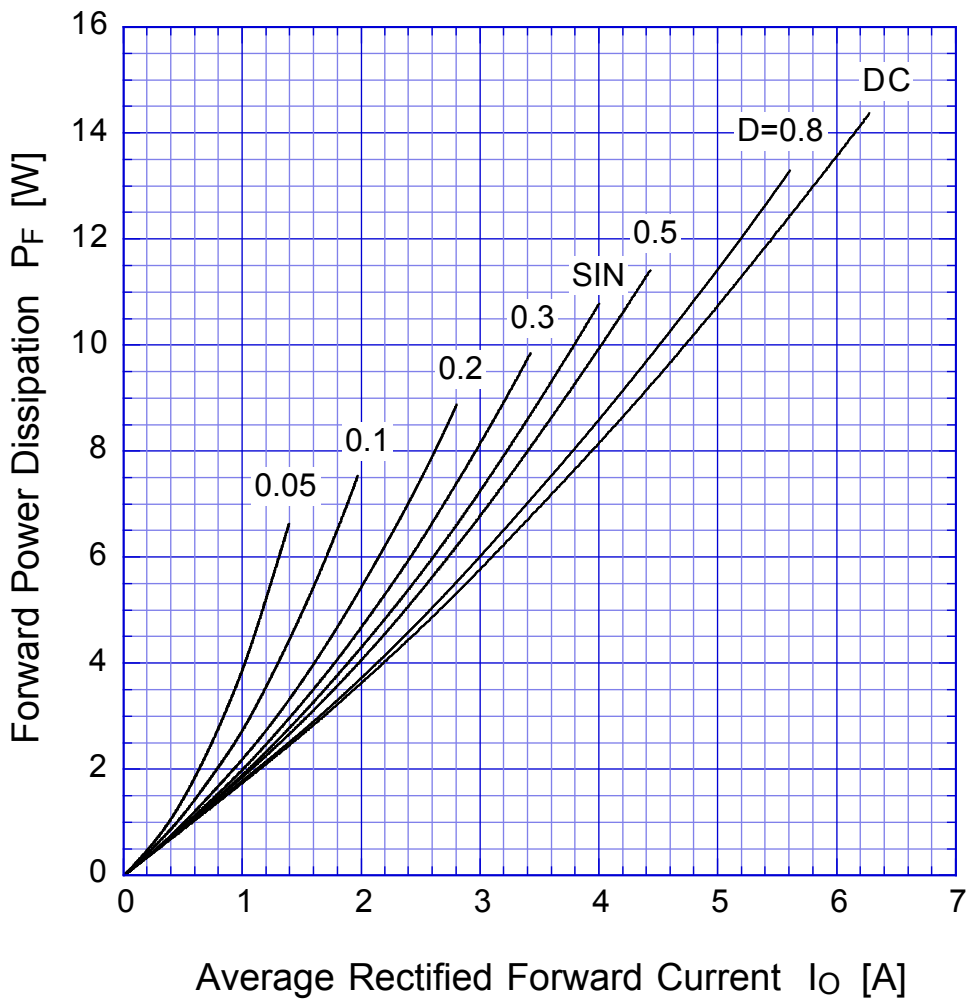


$T_j = 150^\circ\text{C}$

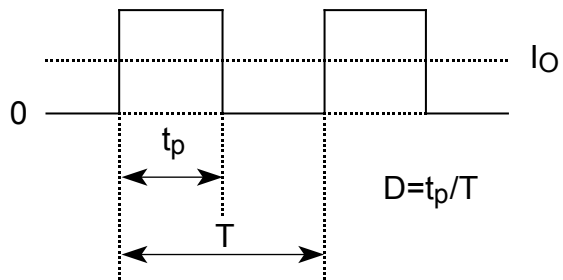


D4SBL40

Derating Curve

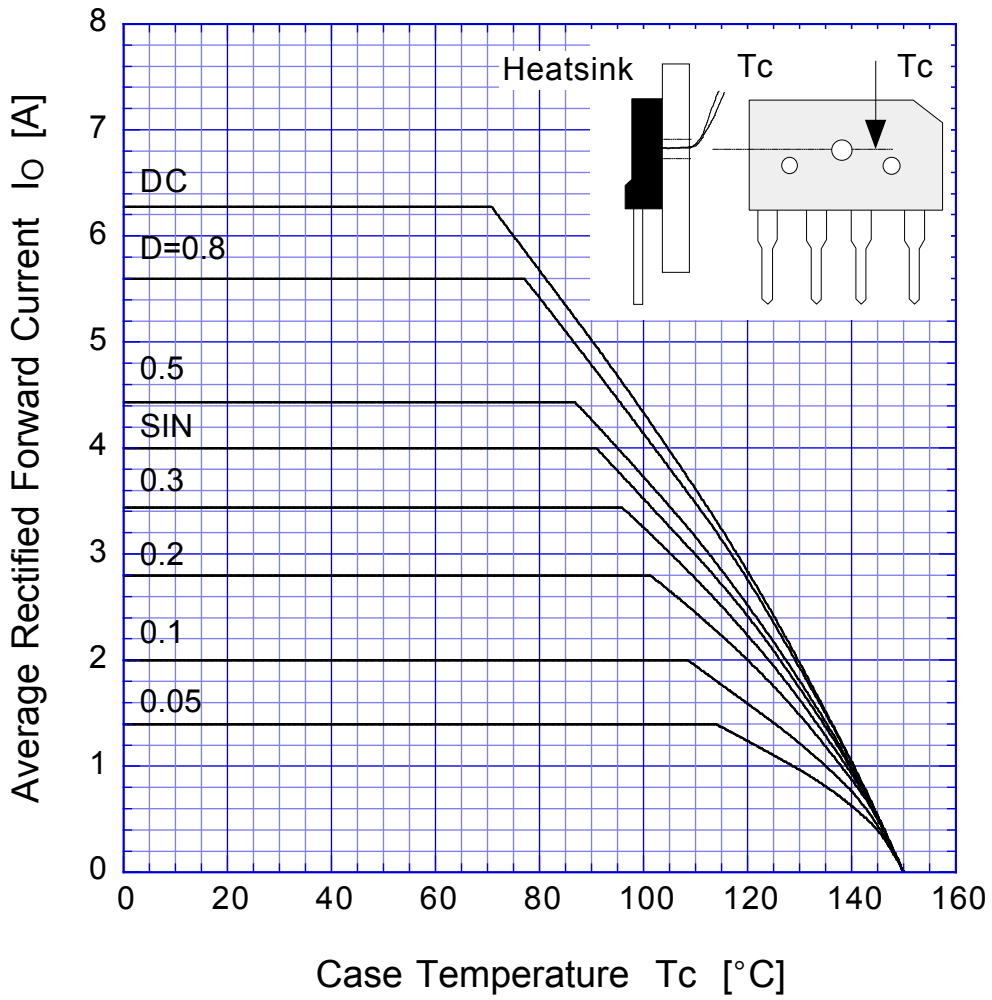


$$V_R = V_{RM}$$

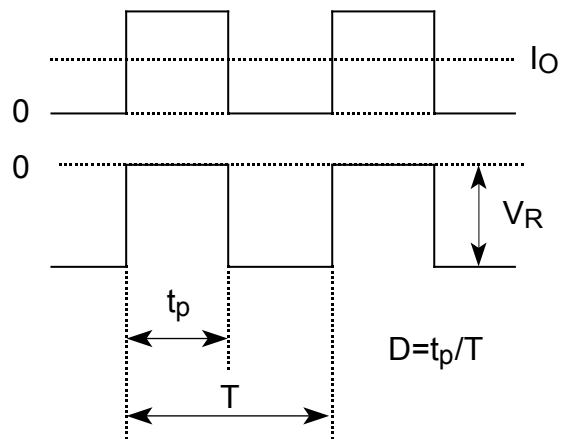


D4SBL40

Derating Curve

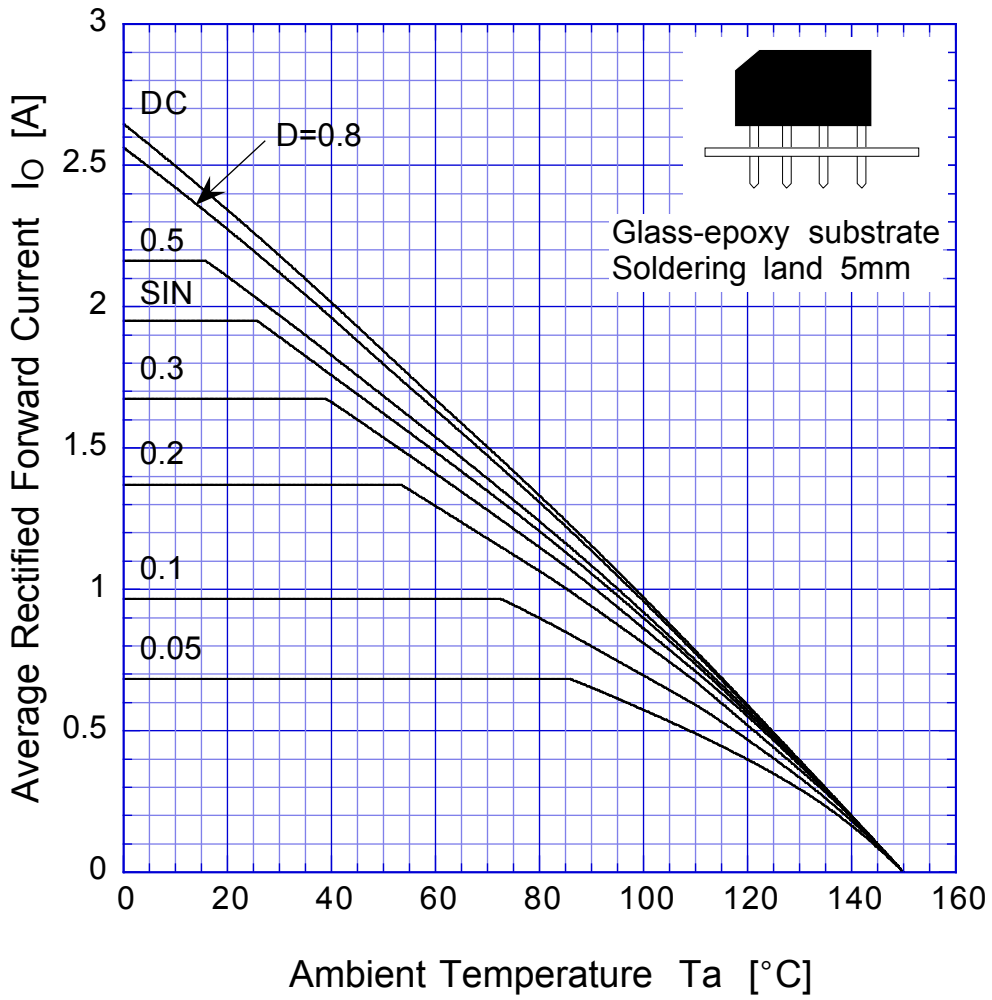

$V_R = V_{RM}$
Sine wave
R-load
Free in air

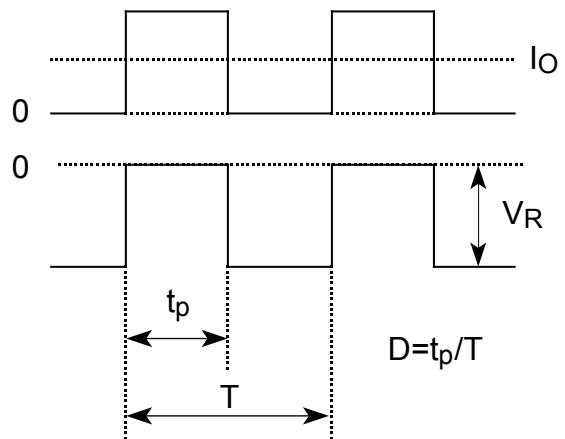

D4SBL40

Peak Surge Forward Capability

